

NF3000C-YXB Series

3 Phase & 3 lines 480VAC

Inquir

Resin case Type/High attenuation



UL1283 (file No.E102708)
EN60939-2 (file No.R50031207)

Application


Inverter/UPS/Machining system etc.

Specifications

Part No.	Rated Current	Weight	
NF3010C-YXB	10A	0.7Kg	fig3
NF3020C-YXB	20A	1Kg	fig4
NF3030C-YXB	30A	1.3Kg	
NF3040C-YXB	40A	1.4Kg	
Rated Voltage	480VAC		
Leakage Current	150mA(10A)/170mA(20,30,40A)		


Note:In case of center grounding type power supply and no phase disconnection,leakage current shall not flow.(A measureding to UL1283/IEC)


fig3 (10A)

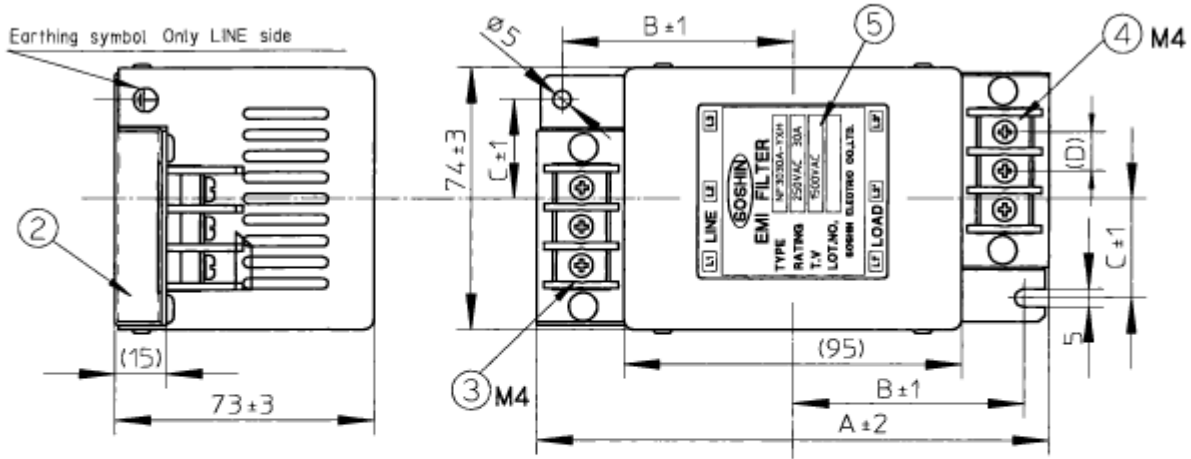

	A	B	C	D
fig2	128	59	28	10
fig3	144	65	28	11

fig4 (20,30,40A)

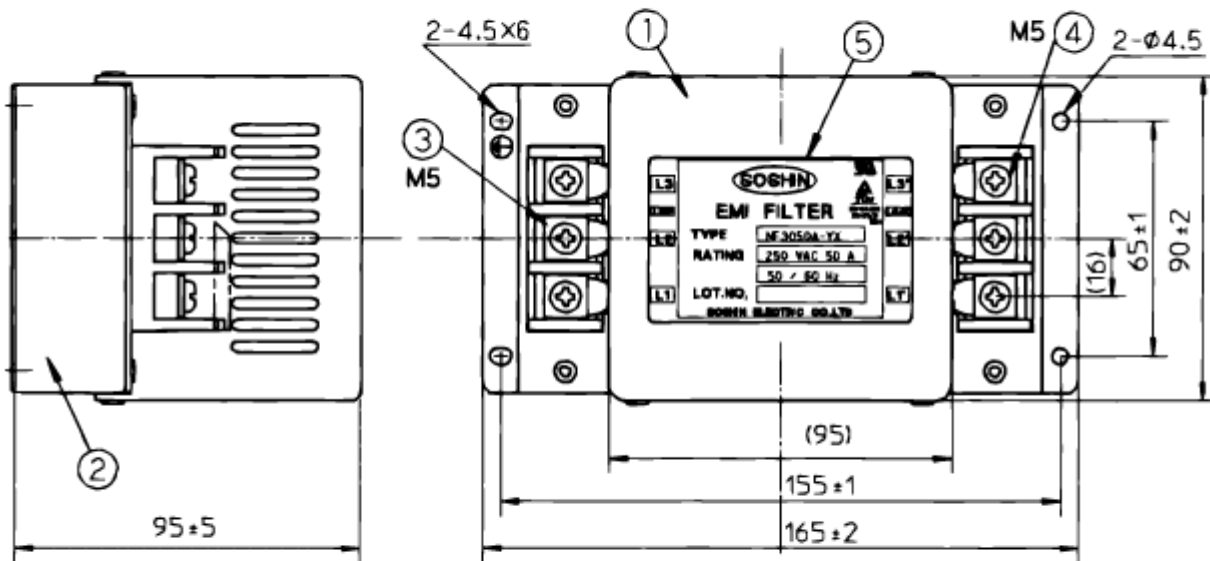

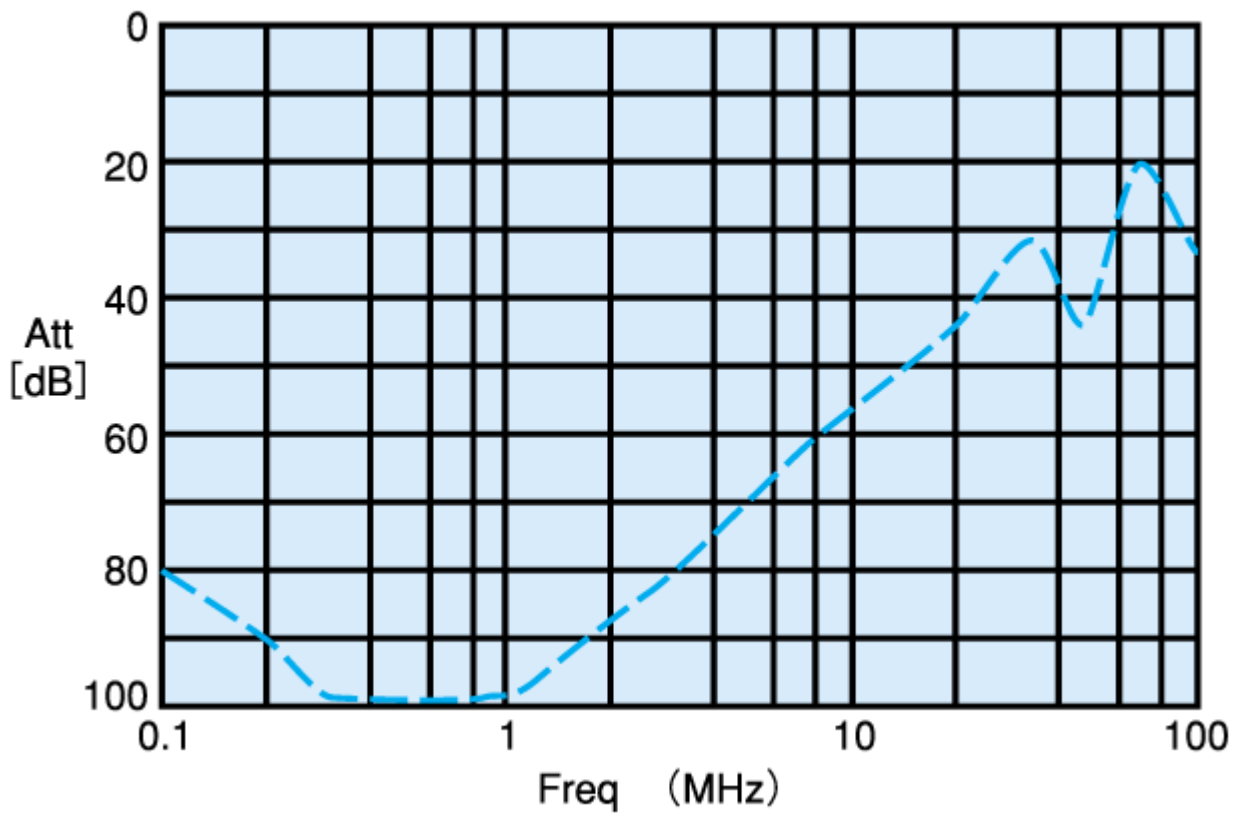

Circuit Diagram

