

Crystal Oscillator

Model Name NH26M26LA Oven-Controlled Crystal Oscillator (OCXO) for Fixed Communication Equipment


www.DataSheet4U.com

Main Application

- Mobile communication base station
- Measuring instrument
- Synthesizer
- Exchanger
- High-end router

Features

- Compact, with a low height.
- Excellent rise characteristics.
- Excellent phase noise characteristics.
- Excellent aging characteristics.

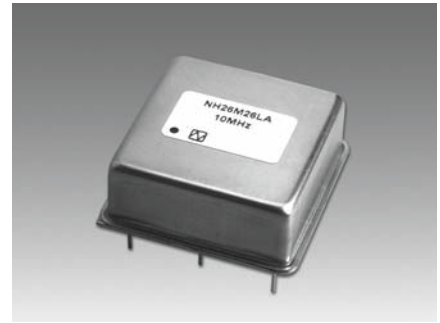

RoHS Compliant
Directive 2002/95/EC

Specifications


Item	Measurement condition	Model	NH26M26LA
Standard nominal frequency (MHz)			10
Power supply voltage			DC +3.3V
Power consumption			2.5 W max. at the start and 1.3 W max. when stable (+25°C)
Output level			HCMOS (V_{OL} : 0.4V max., V_{OH} : 2.4V min.)
Load			1k Ω /5pF
Duty Cycle (1/2V _{cc})			40 to 60%
Operating temperature range			0 to +70°C
Frequency stability	Frequency warm-up characteristic	+25°C five minutes after power is on	$\pm 500 \times 10^{-9}$ max.
	Aging	Based on frequency after 72 hours operation	$\pm 10 \times 10^{-9}$ /day max.
		Based on frequency after 72 hours operation	$\pm 500 \times 10^{-9}$ /year max.
	Frequency / temperature characteristic	0 to +70°C	$\pm 100 \times 10^{-9}$ max.
	Power supply variation characteristics	DC +3.3V $\pm 5\%$	$\pm 20 \times 10^{-9}$ max.
Frequency control characteristic	0 to +2.8V	$\pm 2.0 \times 10^{-6}$ min.	

Reference Value

Phase noise (@10MHz)	Offset frequency	dBc/Hz
	1 Hz	-65 max.
	10 Hz	-95 max.
	100 Hz	-120 max.
	1k Hz	-125 max.
	10k Hz	-130 max.

The value of phase noise changes when the frequency changes.

Dimensions

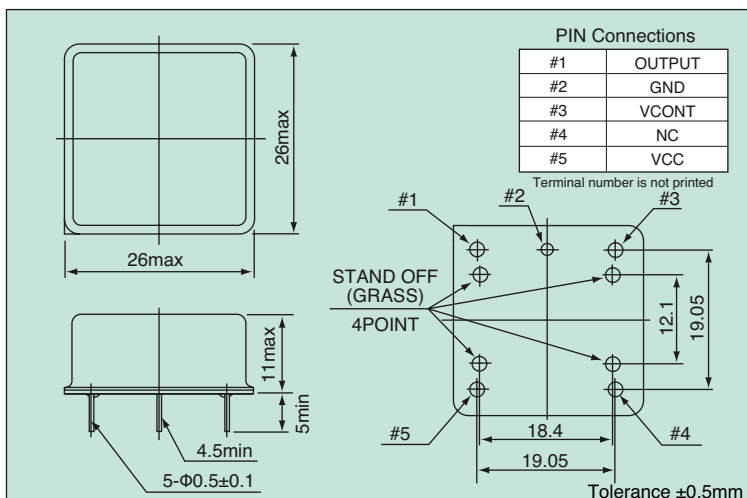

List of Options

Power supply voltage	DC +5.0V
Nominal frequency (MHz)	10 to 20

For details of options, please feel free to contact our sales representatives.

List of Ordering Codes

Frequency (MHz)	Ordering Code
10	NH26M26LA-10M-NSA3424A

The above frequencies are NDK's standard frequencies. Frequencies other than the above are available. Feel free to contact our sales representatives.