


## Step-Up / Flyback Switching Regulator IC with Load Switch Function

### ■GENERAL DESCRIPTION

**NJU7606/08** is a high speed low voltage operation switching regulator control IC with load switch function.

It features a which disconnects load from input during standby and also provides latch mode.

### ■PACKAGE OUTLINE




**NJU7606RB2**

**NJU7608PB1**


### ■FEATURES

- PWM switching control
- Load Switch Function
- Operating Voltage 2.2V to 8V
- Wide Oscillator Range 300kHz to 1MHz
- Maximum Duty Cycle 90% typ.
- Quiescent Current Operating: 800μA typ.  
Standby: 1μA max.
- Soft-Start Function Internal : 16ms typ. or adjustable
- Dead Time Control
- Timer Latch for Short Circuit Protection
- C-MOS Technology
- Package Outline NJU7606RB2 : TVSP10  
NJU7608PB1 : FFP12 -B1

### ■PRODUCT VARIATION




### ■PIN CONFIGURATION

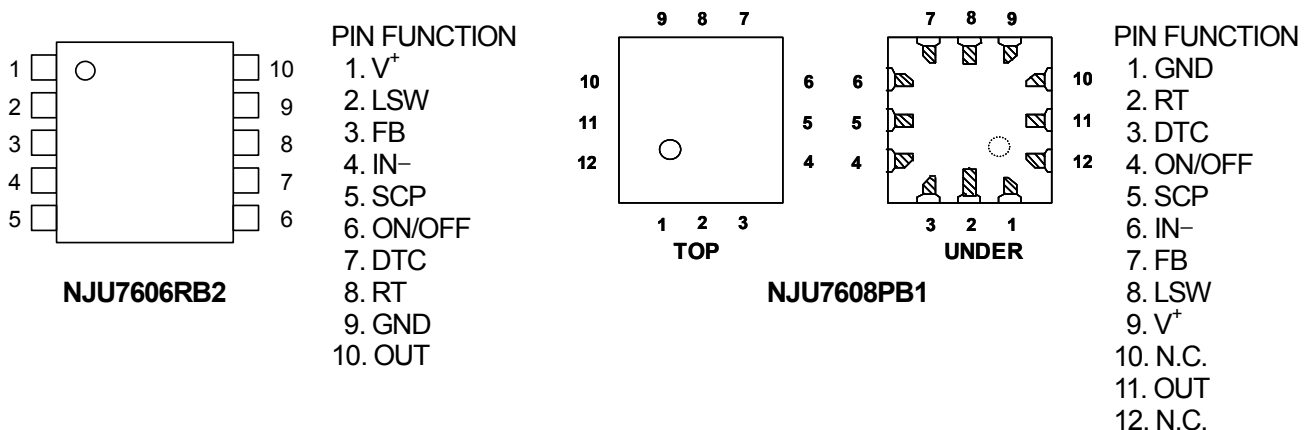

# NJU7606, NJU7608

www.DataSheet4U.com

## ■BLOCK DIAGRAM

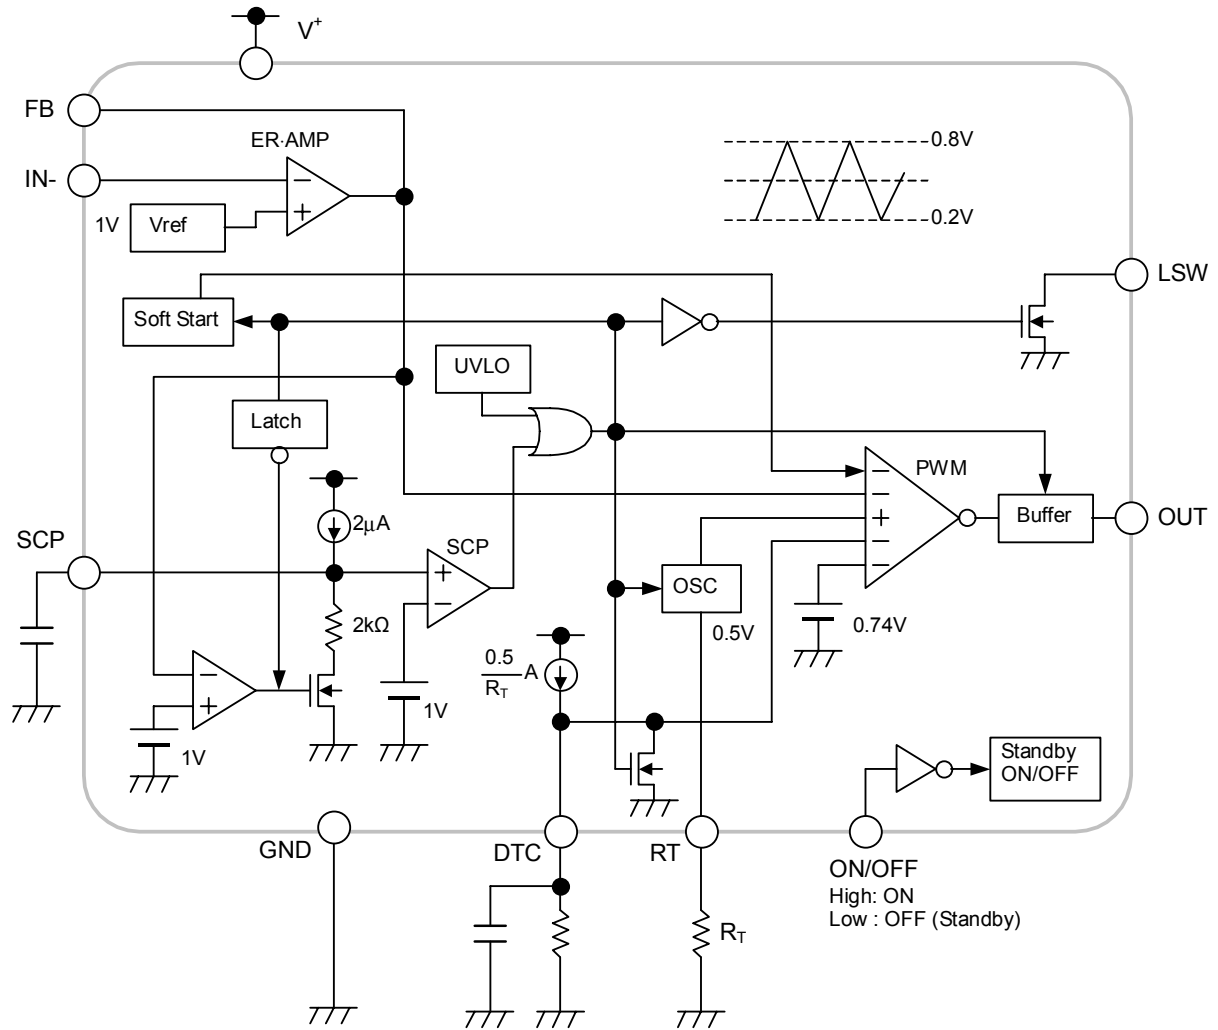

■ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	MAXIMUM RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	+9	V
LSW Output Voltage	V <sub>LSW</sub>	+9	V
Output Pin Current	I <sub>O</sub>	±50	mA
LSW Output Current	I <sub>LSW</sub>	-10	mA
ON/OFF Pin Voltage	V <sub>ON/OFF</sub>	+9 (*1)	V
Power Dissipation	P <sub>D</sub>	TVSP10 :320 FFP12-B1 :300 (*2)	mW
Operating Temperature Range	T <sub>OPR</sub>	-40 ~ +85	°C
Storage Temperature Range	T <sub>STG</sub>	-40 ~ +125	°C

\*1: When input voltage is less than 9V, the absolute maximum control voltage is equal to the input voltage.

\*2: On board. 25mm×25mm×0.2mm

■RECOMMENDED OPERATING CONDITIONS (Ta=25°C)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V <sup>+</sup>	2.2	—	8	V
Oscillator Timing Resistor	R <sub>T</sub>	30	47	120	kΩ
Oscillation Frequency	f <sub>OSC</sub>	300	700	1,000	kHz

■ELECTRICAL CHARACTERISTICS (V<sup>+</sup>=V<sub>ON/OFF</sub>=3.3V, R<sub>T</sub>=47kΩ, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
<b>Under Voltage Lockout Block</b>						
ON Threshold Voltage	V <sub>T_ON</sub>	V <sup>+</sup> = L → H	1.9	2.0	2.1	V
OFF Threshold Voltage	V <sub>T_OFF</sub>	V <sup>+</sup> = H → L	1.8	1.9	2.0	V
Hysteresis Voltage	V <sub>HYS</sub>		60	100	—	mV
<b>Soft Start Block</b>						
Soft Start Time	T <sub>SS</sub>	V <sub>T_ON</sub> → Duty=80%	8	16	24	ms
<b>Short Circuit Protection Block</b>						
Input Threshold Voltage	V <sub>T_PC</sub>	FB Pin	0.95	1.00	1.05	V
Charge Current	I <sub>CHG</sub>	V <sub>SCP</sub> =0V	1.5	2	2.5	μA
Latch Mode ON Threshold Voltage	V <sub>T_LA</sub>	SCP Pin	0.95	1.00	1.05	V
Latch Mode OFF Threshold Voltage	V <sub>T_LAOFF</sub>	SCP Pin	0.2	0.45	0.7	V
<b>Oscillator Block</b>						
RT Pin Voltage	V <sub>RT</sub>		-5%	0.5	+5%	V
Oscillation Frequency	f <sub>OSC</sub>		630	700	770	kHz
Oscillate Supply Voltage Fluctuations	f <sub>DV</sub>	V <sup>+</sup> =2.2V ~ 8V	—	1	—	%
Oscillate Temperature Fluctuations	f <sub>DT</sub>	Ta=-40°C ~ +85°C	—	3	—	%

# NJU7606, NJU7608


www.DataSheet4U.com

## ■ ELECTRICAL CHARACTERISTICS ( $V^+=V_{ON/OFF}=3.3V$ , $R_T=47k\Omega$ , $T_a=25^\circ C$ )


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
<b>Error Amplifier Block</b>						
Reference Voltage	$V_B$		-1.5%	1.00	+1.5%	V
Input Bias Current	$I_B$		-0.1	–	0.1	$\mu A$
Open Loop Gain	$A_V$		–	80	–	dB
Gain Bandwidth Product	$G_B$		–	1	–	MHz
Output Source Current	$I_{OM+1}$	$V_{FB}=1V$ , $V_{IN-}=0.9V$	20	45	70	mA
	$I_{OM+2}$	$V_{FB}=1V$ , $V_{IN-}=0.9V$ , $V^+=2.2V$	4	9	16	mA
Output Sink Current	$I_{OM-}$	$V_{FB}=1V$ , $V_{IN-}=1.1V$	0.10	0.16	0.22	mA
<b>PWM Compare Block</b>						
Input Threshold Voltage	$V_{T0}$	Duty=0%	0.16	0.22	0.28	V
	$V_{T50}$	Duty=50%	0.44	0.5	0.56	V
Maximum Duty Cycle	$M_{AXDUTY1}$	$V_{FB}=0.9V$	85	90	95	%
	$M_{AXDUTY2}$	$V_{FB}=0.9V$ , $R_{DTC}=47k\Omega$	40	50	60	%
<b>Output Block</b>						
Output High Level ON Resistance	$R_{OH}$	$I_O=-20mA$	–	10	20	$\Omega$
Output Low Level ON Resistance	$R_{OL}$	$I_O=+20mA$	–	5	10	$\Omega$
<b>Load SW Output Block</b>						
LSW Output ON Resistance	$R_{LSW}$	$I_{LSW}=1mA$	–	55	100	$\Omega$
LSW Output Leak Current	$I_{LEAK\_LSW}$	$V_{LSW}=9V$ , $V_{ON/OFF}=0V$	–	–	0.1	$\mu A$
<b>ON/OFF Block</b>						
ON Control Voltage	$V_{ON}$	$V_{ON/OFF}=L \rightarrow H$	1.6	–	$V^+$	V
OFF Control Voltage	$V_{OFF}$	$V_{ON/OFF}=H \rightarrow L$	0	–	0.3	V
<b>General Characteristics</b>						
Quiescent Current	$I_{DD}$	$R_L=Non\ Load$	–	800	1200	$\mu A$
Standby Current	$I_{DD\_STB}$	$V_{ON/OFF}=0V$	–	–	1.0	$\mu A$

## ■ TYPICAL APPLICATIONS

### Step-Up Converter (Input Line Load SW)

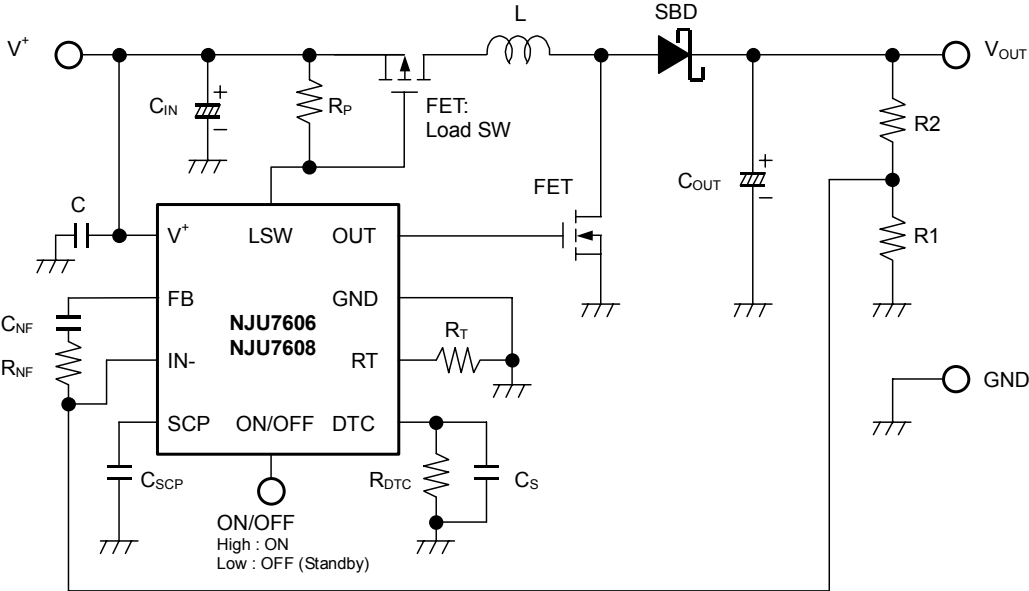


### Step-Up Converter (Output Line Load SW)

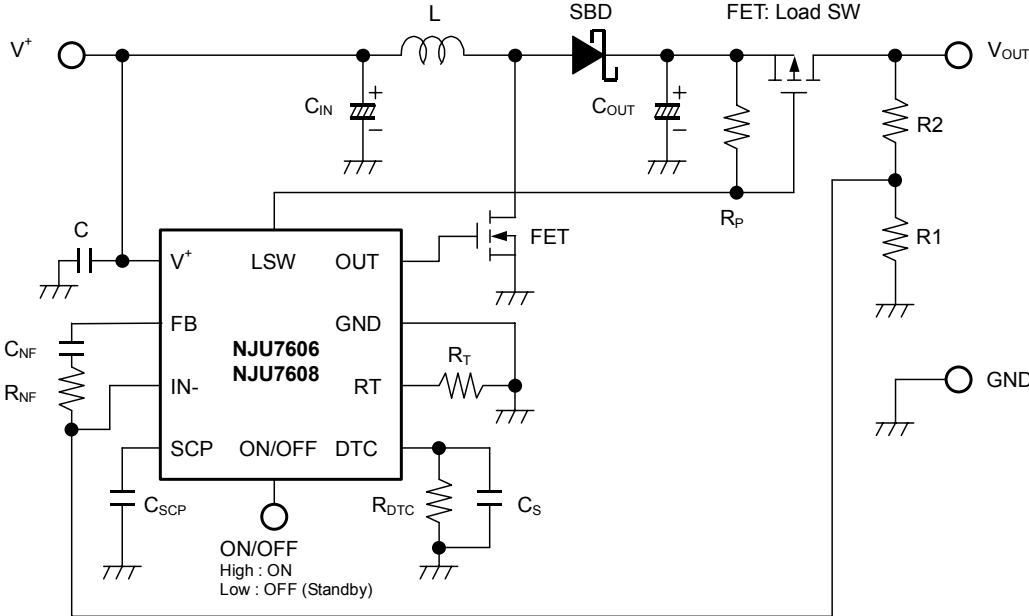


# NJU7606, NJU7608

## ■ TYPICAL CHARACTERISTICS


Oscillation Frequency vs. Timing Resistance  
( $V^+ = 3.3V, T_a = 25^\circ C$ )

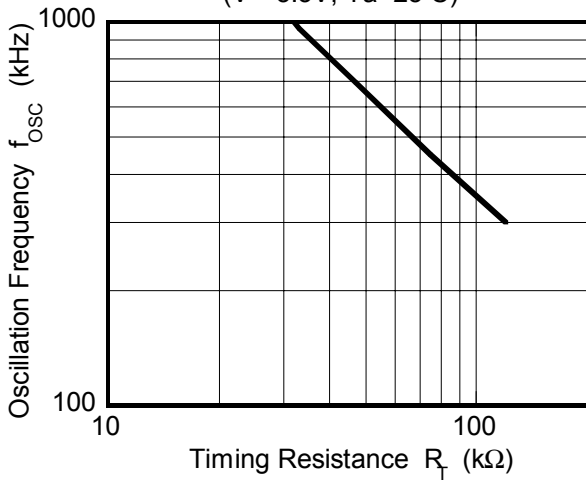


Maximum Duty Cycle vs. Oscillator Frequency  
( $V^+ = 3.3V, T_a = 25^\circ C$ )

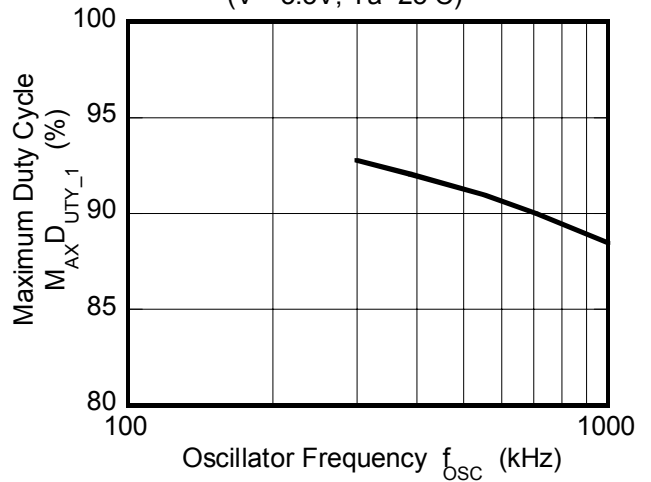



Oscillation Frequency vs. Operating Voltage  
( $R_T = 47k\Omega, T_a = 25^\circ C$ )

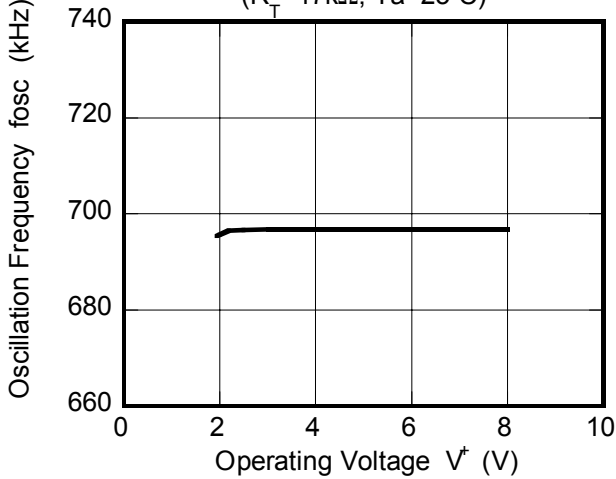

Duty Cycle vs.  $R_{DTC}$

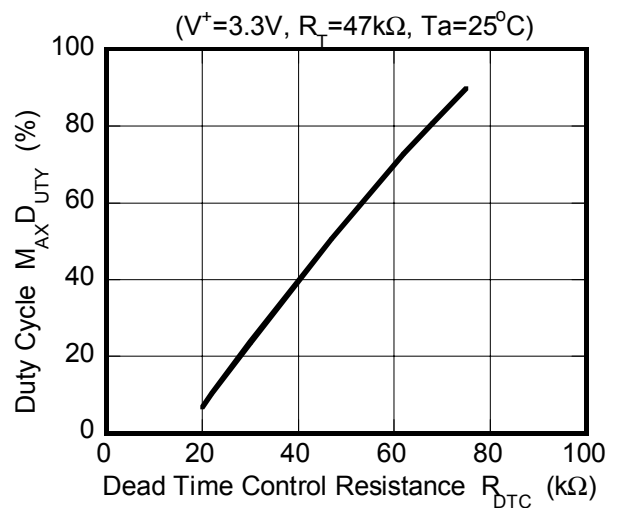


Reference Voltage vs. Operating Voltage  
( $T_a = 25^\circ C$ )

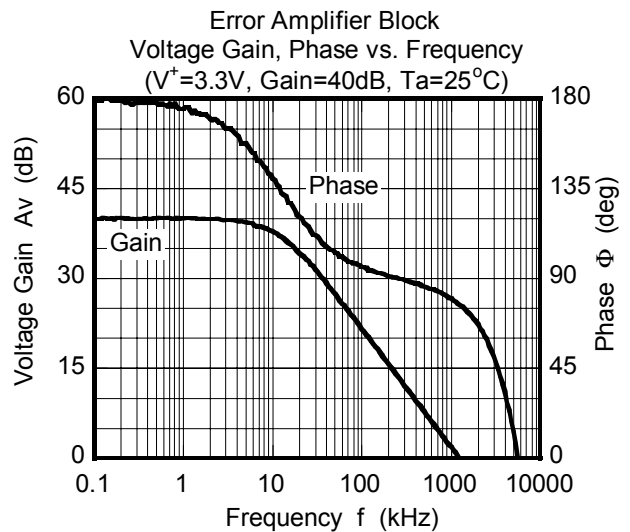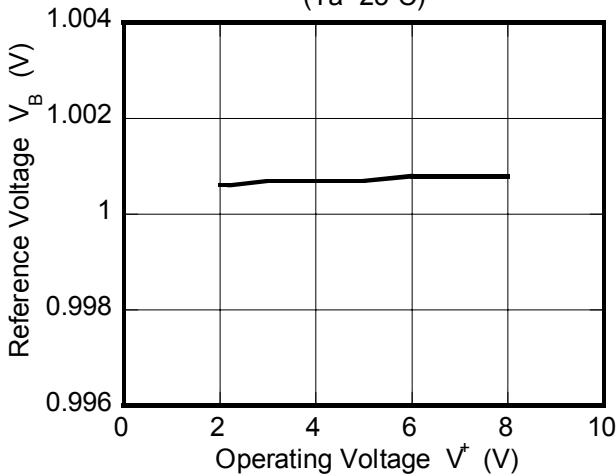


■ TYPICAL CHARACTERISTICS


Quiescent Current vs. Operating Voltage  
( $R_T=47k\Omega$ ,  $R_L=Non\ Load$ ,  $T_a=25^\circ C$ )

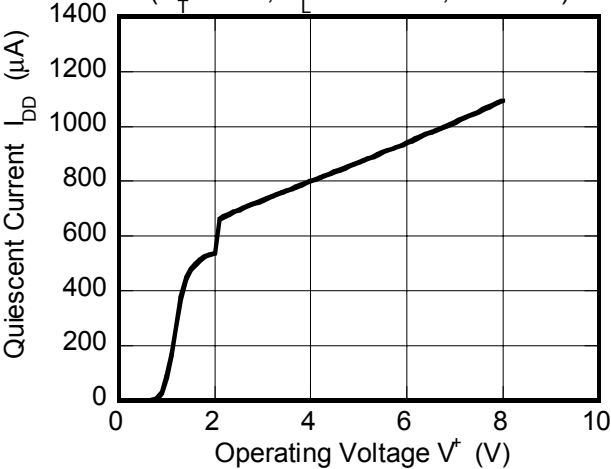


Standby Current vs. Operating Voltage  
( $R_T=47k\Omega$ ,  $V_{ON/OFF}=0V$ ,  $T_a=25^\circ C$ )

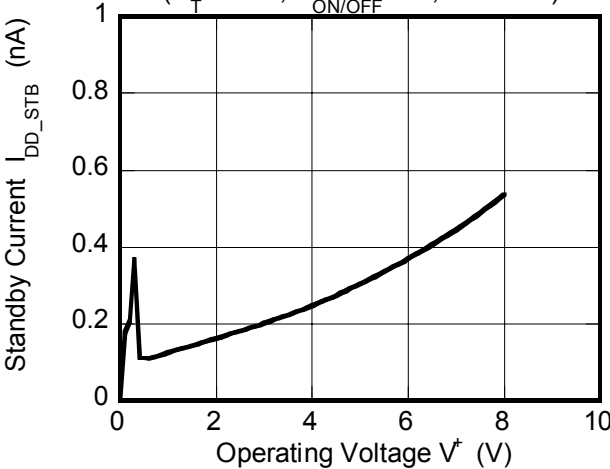


Output Block  
Output High Level ON Resistance vs. Temperature ( $I_o=-20mA$ )

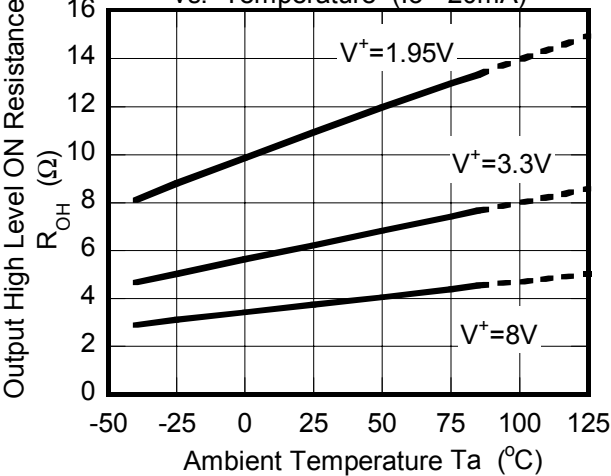


Output Block  
Output Low Level ON Resistance vs. Temperature ( $I_o=+20mA$ )

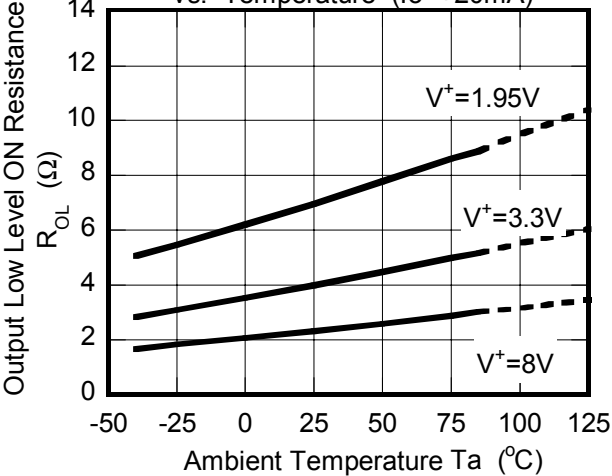

Error Amplifier Block  
Output Source Current vs. Temperature ( $V_{FB}=1V$ ,  $V_{IN-}=0.9V$ )

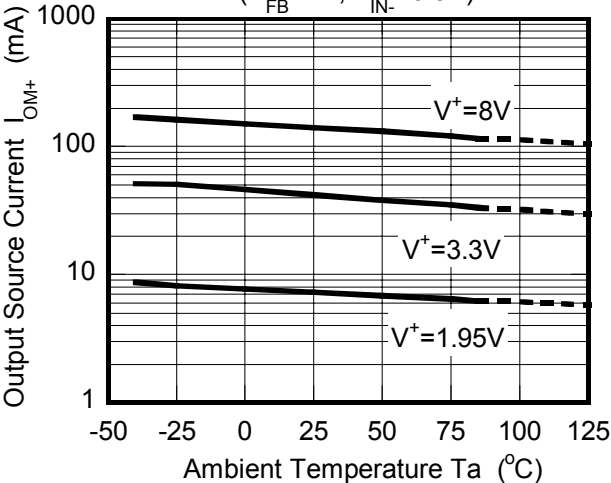


Error Amplifier Block  
Output Sink Current vs. Temperature ( $V_{FB}=1V$ ,  $V_{IN-}=1.1V$ )

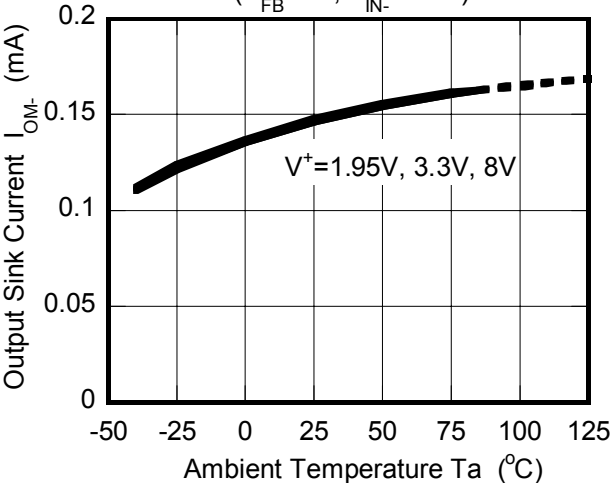


# NJU7606, NJU7608

## ■ TYPICAL CHARACTERISTICS


Soft Start Time vs. Temperature  
( $V^+ = 3.3V$ )

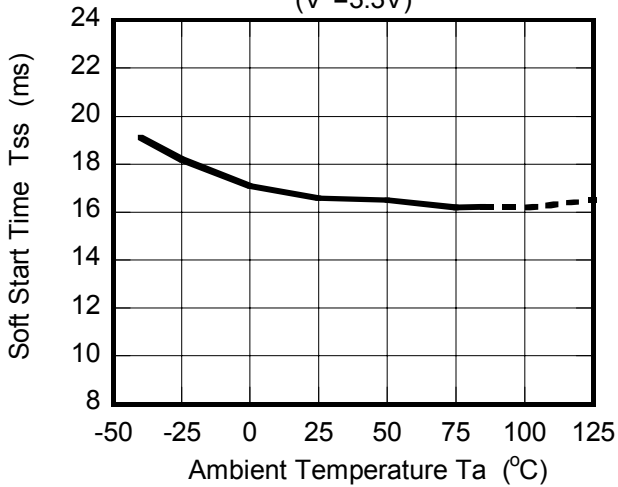


Reference Voltage vs. Temperature  
( $V^+ = 3.3V$ )

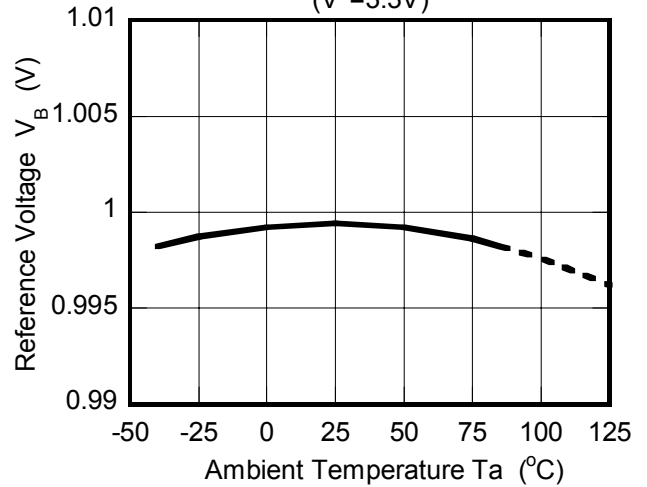


Oscillator Frequency vs. Temperature  
( $V^+ = 3.3V, R_T = 47k\Omega$ )

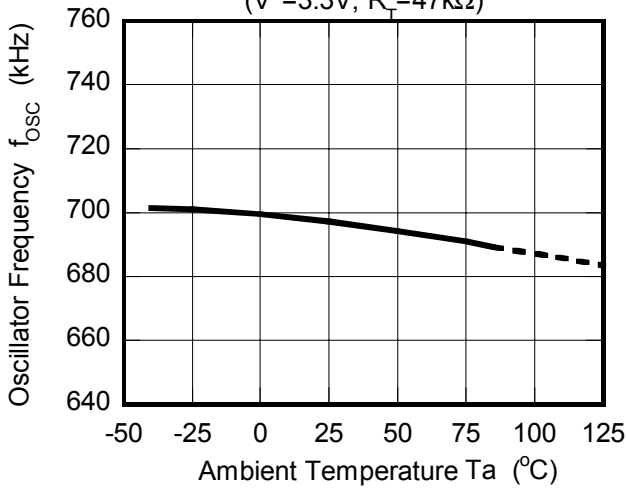

Maximum Duty Cycle vs. Temperature  
( $V^+ = 3.3V$ )





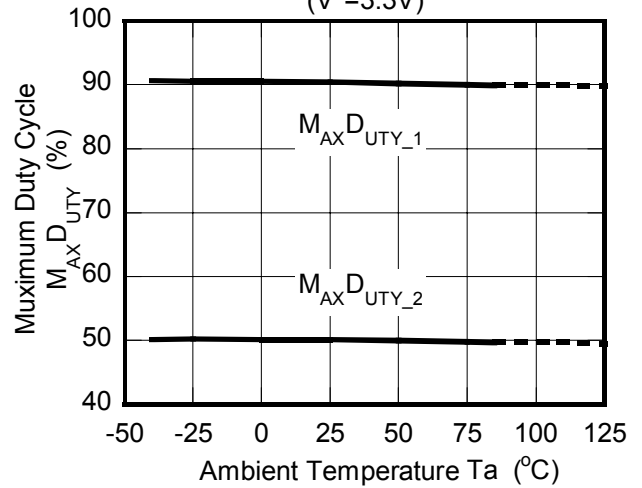


Under Voltage Lockout Block vs. Temperature

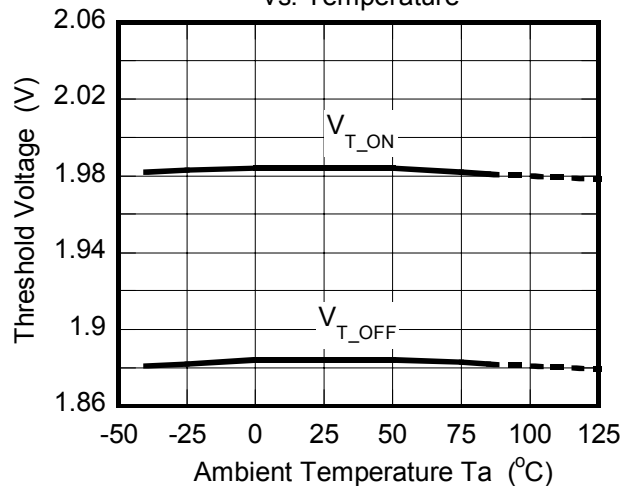



■ TYPICAL CHARACTERISTICS

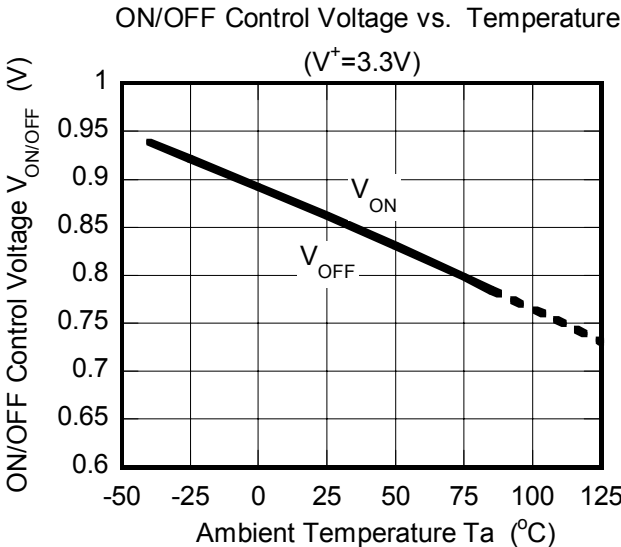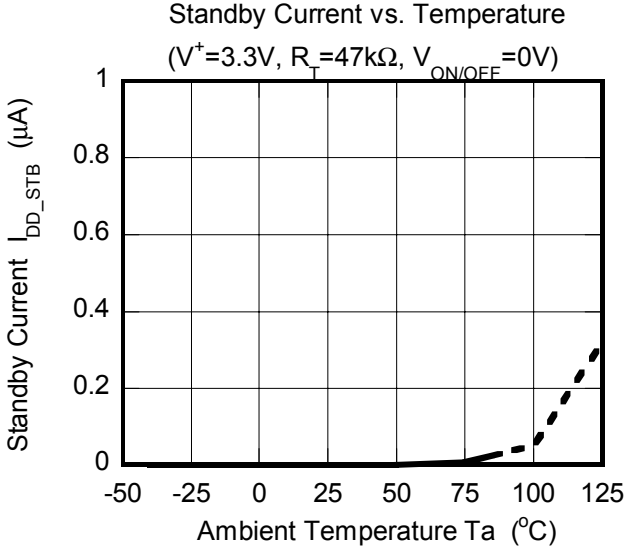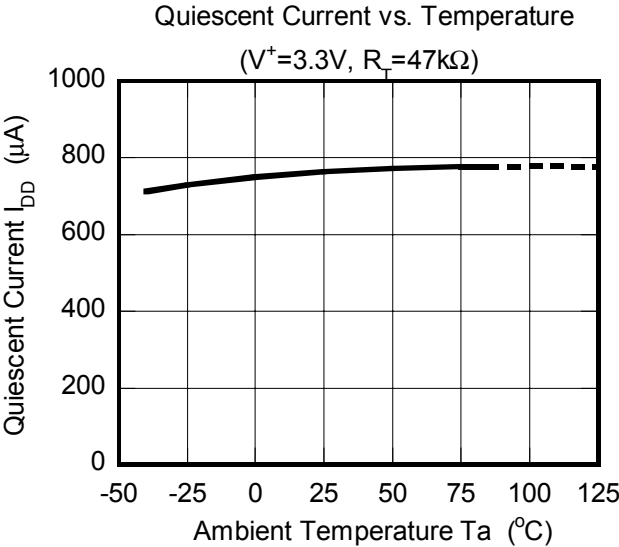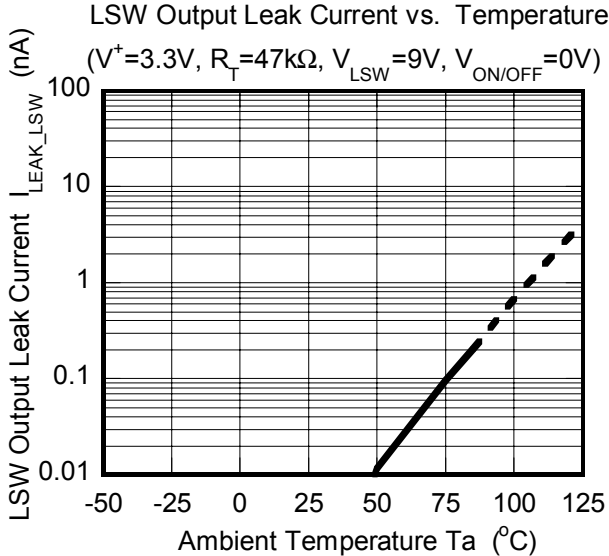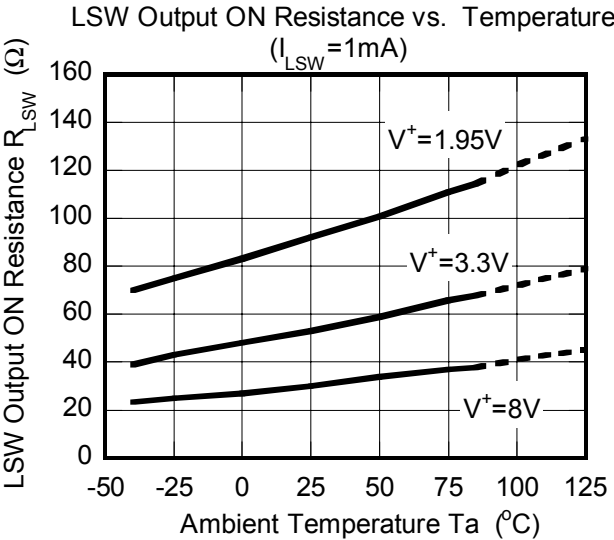

# NJU7606, NJU7608

www.DataSheet4U.com

## MEMO

**[CAUTION]**

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.