

FRED Ultrafast Soft Recovery Diode Module 100A x 2 / 400V

FEATURES

- Very low Q_{rr} and t_{rr}
- Lead (Pb)-free
- Designed and qualified for industrial level
- Reduced RFI and EMI
- Reduced snubbing
- Planar FRED Chip
- Epoxy molding structure


DESCRIPTION

FRED diodes are optimized to reduce losses and EMI/RFI in high frequency power conditioning systems.

An extensive characterization of the recovery behavior for different values of current, temperature and dI/dt simplifies the calculations of losses in the operating conditions. The softness of the recovery eliminates the need for a snubber in most applications.

TYPICAL APPLICATIONS

- Power converters
- Motor drives
- Welders
- Switching power supplies
- Uninterruptible power supply (UPS)
- Power factor correction (PFC) circuit
- Inverter
- Choppers
- Battery chargers

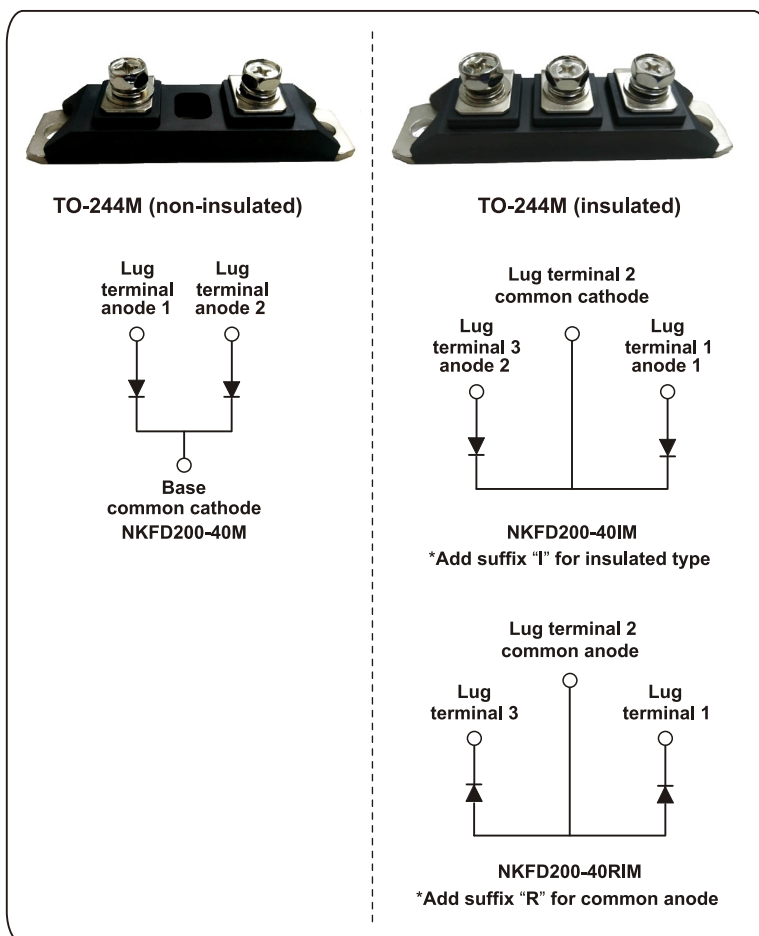

PRODUCT SUMMARY

$I_{F(AV)}$	200A
V_R	400V
$I_{F(DC)}$ at T_C	160A at 100 °C

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	TEST CONDITIONS	MAX.	UNIT
Cathode to anode voltage	V_R		400	V
Average forward current	$I_{F(AV)}$	$T_C = 25^\circ\text{C}$, per leg	315	A
		$T_C = 120^\circ\text{C}$ per device	200	
		$T_C = 120^\circ\text{C}$ per leg	100	
Single pulse forward current	I_{FSM}	Limited by junction temperature, per leg	1200	
Non-repetitive avalanche energy	E_{AS}	$L = 100 \mu\text{H}$, duty cycle limited by maximum T_J	1.4	mJ
Maximum power dissipation	P_D	$T_C = 25^\circ\text{C}$	394	W
		$T_C = 100^\circ\text{C}$	192	
Operating junction and storage temperature range	T_J, T_{Stg}		- 55 to 150	°C

Nell High Power Products

ELECTRICAL SPECIFICATIONS (T _J = 25 °C unless otherwise specified)						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Cathode to anode breakdown voltage	V _{BR}	I _R = 100 μA	400	-	-	V
Maximum forward voltage	V _{FM}	I _F = 100 A	-	1.15	1.25	
		I _F = 200 A	-	1.30	1.45	
		I _F = 100 A, T _J = 125 °C	-	0.95	1.10	
Maximum reverse leakage current per leg	I _{RM}	T _J = 125°C, V _R = 400V	-	0.5	4	mA
		T _J = 25°C, V _R = 400V	-	1.0	10	μA
Junction capacitance	C _T	V _R = 200V	-	280	380	pF
Series inductance	L _S	From top of terminal hole to mounting plane	-	6.0	-	nH
Maximum RMS insulation voltage (for insulated type)	V _{INS}	50Hz	-	-	2500(1min) 3000(1s)	V

DYNAMIC RECOVERY CHARACTERISTICS PER LEG (T _J = 25 °C unless otherwise specified)						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Reverse recovery time	t _{rr}	I _F = 0.5A, I _R = 1.0A, I _{RR} = 0.25A	-	63	70	ns
		I _F = 1.0A, dI _F /dt=200A/μs, V _R = 30V	-	50	-	
		T _J = 25 °C	-	77	120	
		T _J = 125 °C	-	290	440	
Peak recovery current	I _{RRM}	T _J = 25 °C	-	7.5	14	A
		T _J = 125 °C	-	16	30	
Reverse recovery charge	Q _{rr}	T _J = 25 °C	-	290	780	nC
		T _J = 125 °C	-	2300	3600	
Peak rate of recovery current	dI _{(rec)M} /dt	T _J = 25 °C	-	320	-	A/μs
		T _J = 125 °C	-	270	-	

THERMAL AND MECHANICAL SPECIFICATIONS						
PARAMETER		SYMBOL	MIN.	TYP.	MAX.	UNIT
Maximum junction and storage temperature range		T _J , T _{stg}	-55	-	150	°C
Thermal resistance, junction to case per leg	TO-244M (non-insulated)	R _{thJC}	-	-	0.30	°C/W
	TO-244M (insulated)		-	-	0.42	
Thermal resistance, junction to case per module	TO-244M (non-insulated)	R _{thJC}	-	-	0.15	
	TO-244M (insulated)		-	-	0.21	
Typical thermal resistance, case to heatsink		R _{thCS}	-	0.10	-	
Weight	TO-244M (non-insulated)		-	80 (2.82)	-	g (oz.)
	TO-244M (insulated)		-	95 (3.36)	-	
Mounting torque ⁽¹⁾			30 (3.4)	-	40 (4.6)	lbf·in (N·m)
Mounting torque center hole			12 (1.4)	-	18 (2.1)	
Terminal torque			30 (3.4)	-	40 (4.6)	
Vertical pull			-	-	80	lbf·in
2" lever pull			-	-	35	

Note

(1) Mounting surface must be smooth, flat, free of burrs or other protrusions. Apply a thin even film of thermal grease to mounting surface.

Gradually tighten each mounting bolt in 5 to 10 lbf. in steps until desired or maximum torque limits are reached

Ordering Information Table

Device code	NK	F	D	200	—	40	R	I	M
	1	2	3	4		5	6	7	8
	1	2	3	4		5	6	7	8
	1	2	3	4		5	6	7	8
	1	2	3	4		5	6	7	8
	1	2	3	4		5	6	7	8
	1	2	3	4		5	6	7	8
	1	2	3	4		5	6	7	8
	1	2	3	4		5	6	7	8
	1	2	3	4		5	6	7	8

- 1 - Nell's power module
- 2 - F for Ultrafast soft recovery diode
- 3 - D for Dual Diodes, TO-244 Package
- 4 - Maximum average forward current, 200 = 100A x 2
- 5 - Voltage rating (40 = 400V)
- 6 - None for common cathode configuration
"R" for common anode configuration
- 7 - None for non-insulated type
"I" for insulated type
- 8 - M for Molding structure

Fig.1 Maximum forward voltage drop vs. Instantaneous forward current (per leg)

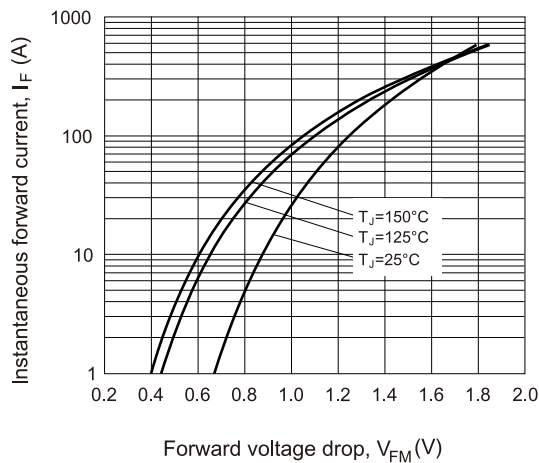


Fig.2 Typical reverse current vs. reverse voltage (per leg)

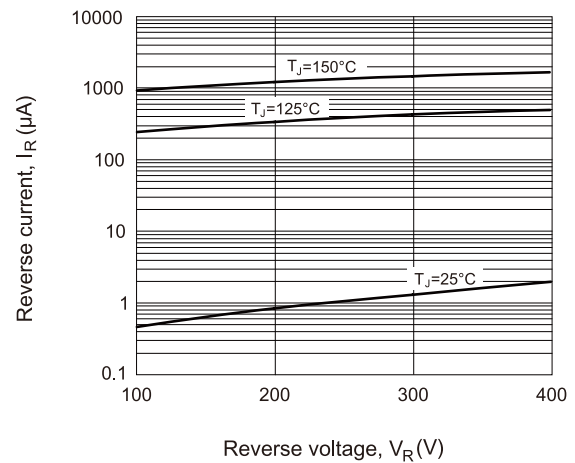


Fig.3 Typical junction capacitance vs. reverse voltage (per leg)

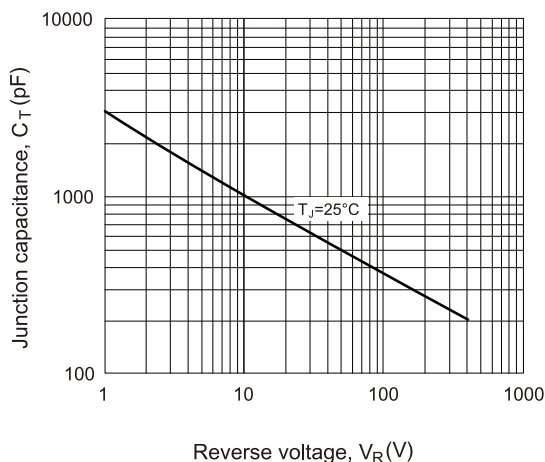


Fig.4 Maximum allowable case temperature vs. DC forward current (per leg)

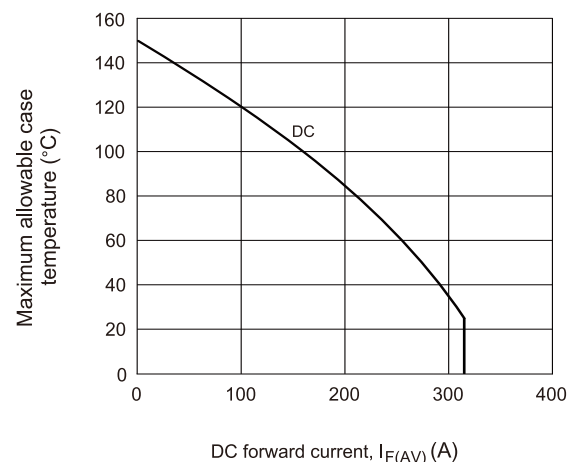


Fig.5 Typical reverse recovery time vs. di_F/dt (per leg)

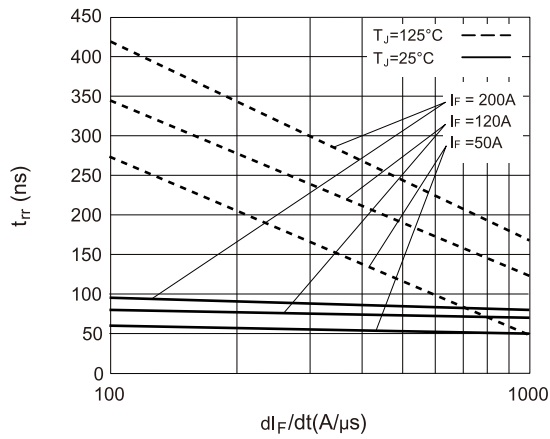


Fig.6 Typical recovery current vs. di_F/dt (per leg)

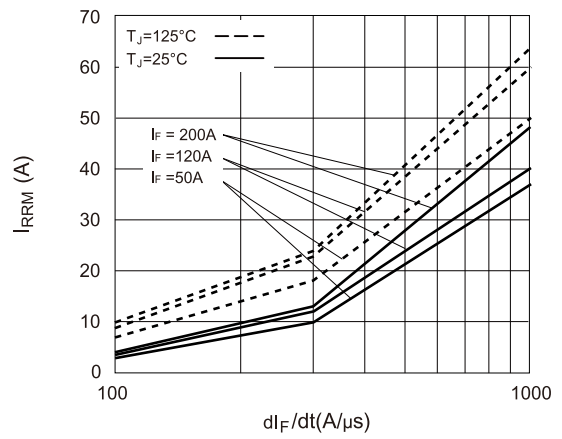


Fig.7 Typical stored charge vs. di_F/dt (per leg)

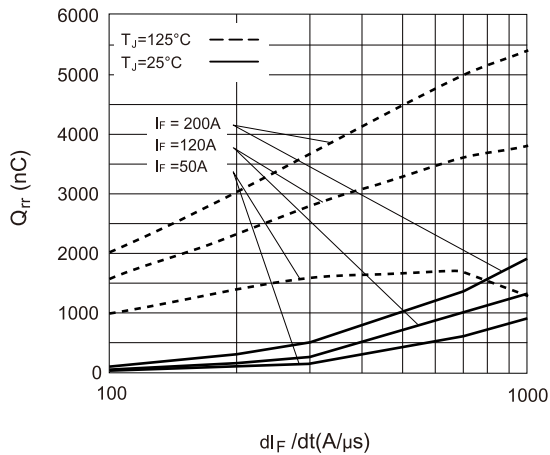


Fig.8 Typical $di_{(rec)M}/dt$ vs. di_F/dt (per leg)

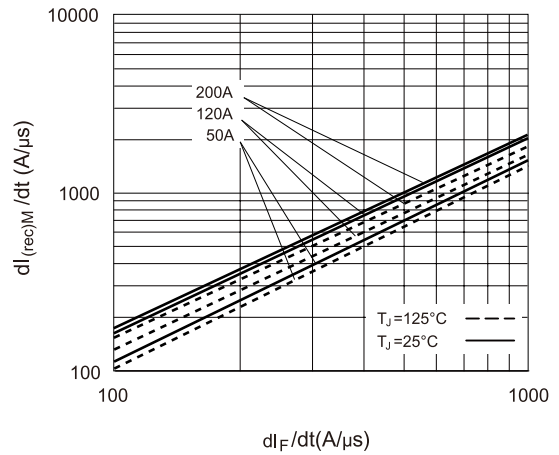


Fig.9-1 Maximum thermal impedance $R_{th(j-c)}$ characteristics (per leg, for TO-244M non-insulated)

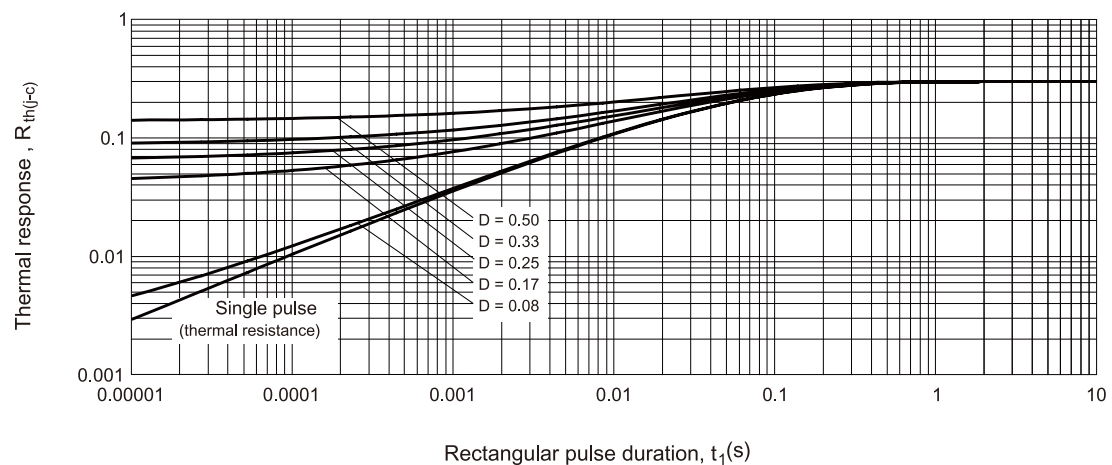


Fig.9-2 Maximum thermal impedance $R_{th(j-c)}$ characteristics (per leg, for TO-244M insulated)

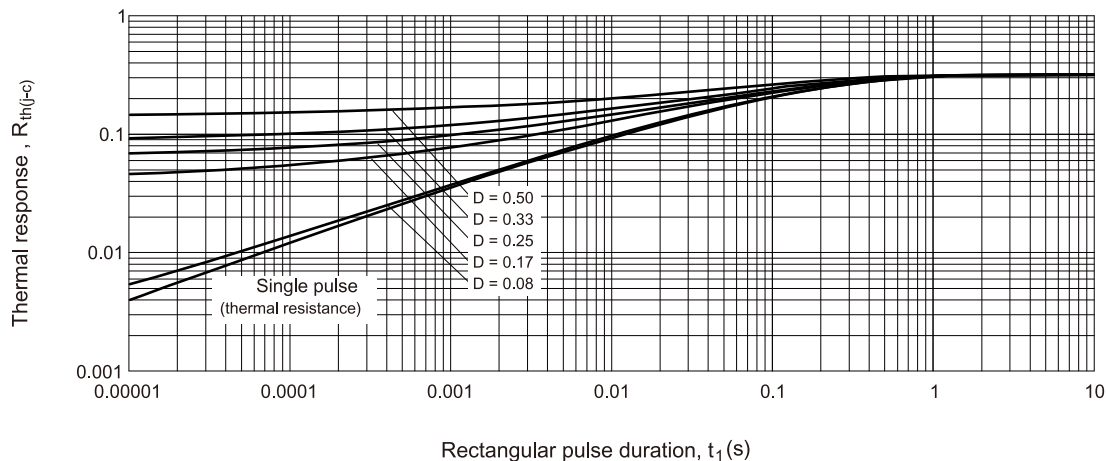


Fig.10 Reverse recovery parameter test circuit


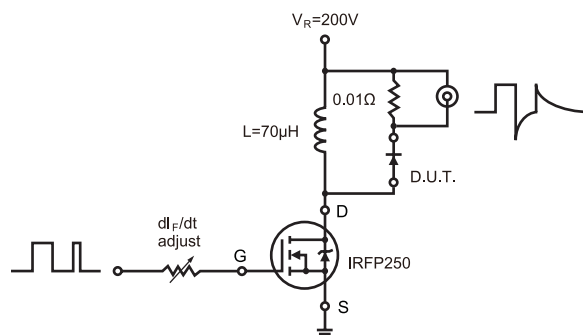


Fig.11 Reverse recovery waveform and definitions



- (1) dI_F/dt - rate of change of current through zero crossing
- (2) I_{RRM} - peak reverse recovery current
- (3) t_{rr} - reverse recovery time measured from zero crossing point of negative going I_F to point where a line passing through $0.75 I_{RRM}$ and $0.50 I_{RRM}$ extrapolated to zero current.
- (4) Q_{rr} - area under curve defined by t_{rr} and I_{RRM}
- (5) $dI_{(rec)M}/dt$ - peak rate of change of current during t_b portion of t_{rr}

$$Q_{rr} = \frac{t_{rr} \times I_{RRM}}{2}$$

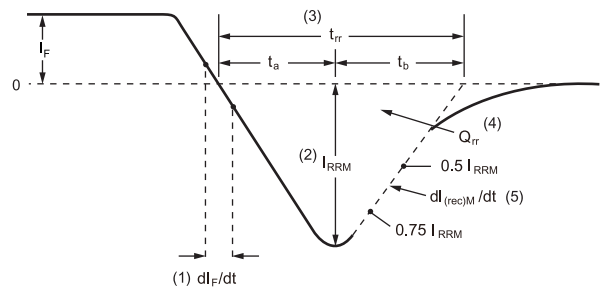