



Data Sheet

NT39207

480/320 Outputs TFT LCD Gate Driver

Version 0.11

Preliminary

1	REVISION HISTORY	3
2	FEATURES	4
3	GENERAL DESCRIPTION	4
4	PIN ASSIGNMENT	5
5	BLOCK DIAGRAM	6
6	PIN AND PAD DESCRIPTIONS	7
7	FUNCTIONAL DESCRIPTION	10
8	ABSOLUTE MAXIMUM RATINGS	12
9	DC ELECTRICAL CHARACTERISTICS	12
10	AC ELECTRICAL CHARACTERISTICS	13
11	TIMING WAVEFORMS	14
12	CHIP OUTLINE DIMENSIONS	19
13	BONDING DIAGRAM	20

NOVATEK CONFIDENTIAL
NO DISCLOSURE

Revision History

NT39207 Specification Revision History		
Version	Content	Data
0.0	Original	2005/6/20
0.1	Add power on/off sequence (page 10,11)	2005/6/23
0.2	Modify identification of chip size (page 20)	2005/7/13
0.3	Modify VEE waveform of power sequence (page 10,11) 1*OE to 3*OE (page 7,8) Add pads for MODE,XON & dimension modified (page 20)	2005/8/30
0.4	Modify dummy pins' location & pad size (page 20)	2005/10/18
0.5	Modify Bonding Diagram (page 21)	2005/10/19
0.6	Correct pass line table (page 9) and remove label PWCL (page 14)	2005/12/20
0.7	Add waveforms under IC work with 3-OE. (page 19)	2005/12/23
0.8	Modify alignment mark. (page 20)	2006/01/16
0.9	Modify pass line table (page 9)	2006/04/03
0.10	Modify the definition of "MODE" (page 8)	2006/04/07
0.11	Modify the description of power on/off sequence (page 10)	2007/01/18

Features


- Gate driver for TFT LCD panel
- 480/320 channel outputs+2pins (Fixed to VEE)
- Bi-directional shift selectable function
- Driving voltage: VEE + 40V
- Double gate scan
- 2.7 ~ 3.6V logical interface
- Cascade function for dot-expansion
- CMOS silicon gate (P-type)
- COG solution

General Description


NT39207 is a dedicated gate driver IC for TFT LCD Panel. After a start pulse is triggered, output pins will output high-driving voltage pulses sequentially for the gate signals of the LCD Panel. This chip also provides shift up/down selection and cascade functions for dot expansion. The special pin location is designed for COG manufacture.

NOVATEK CONFIDENTIAL
NO DISCLOSURE

Pin Assignment

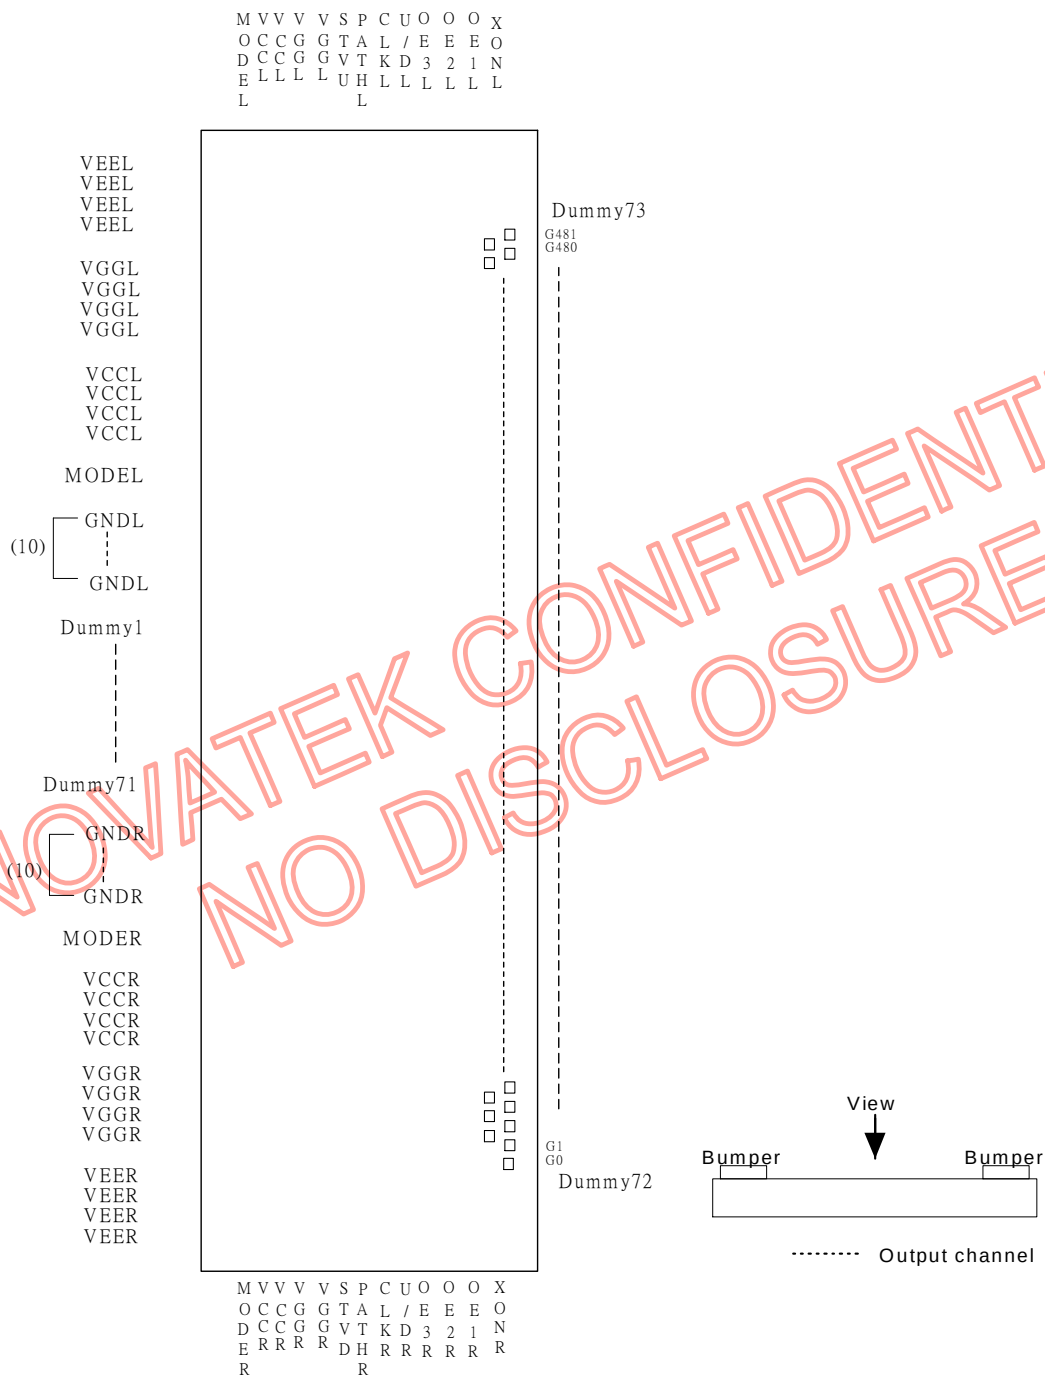

Block Diagram

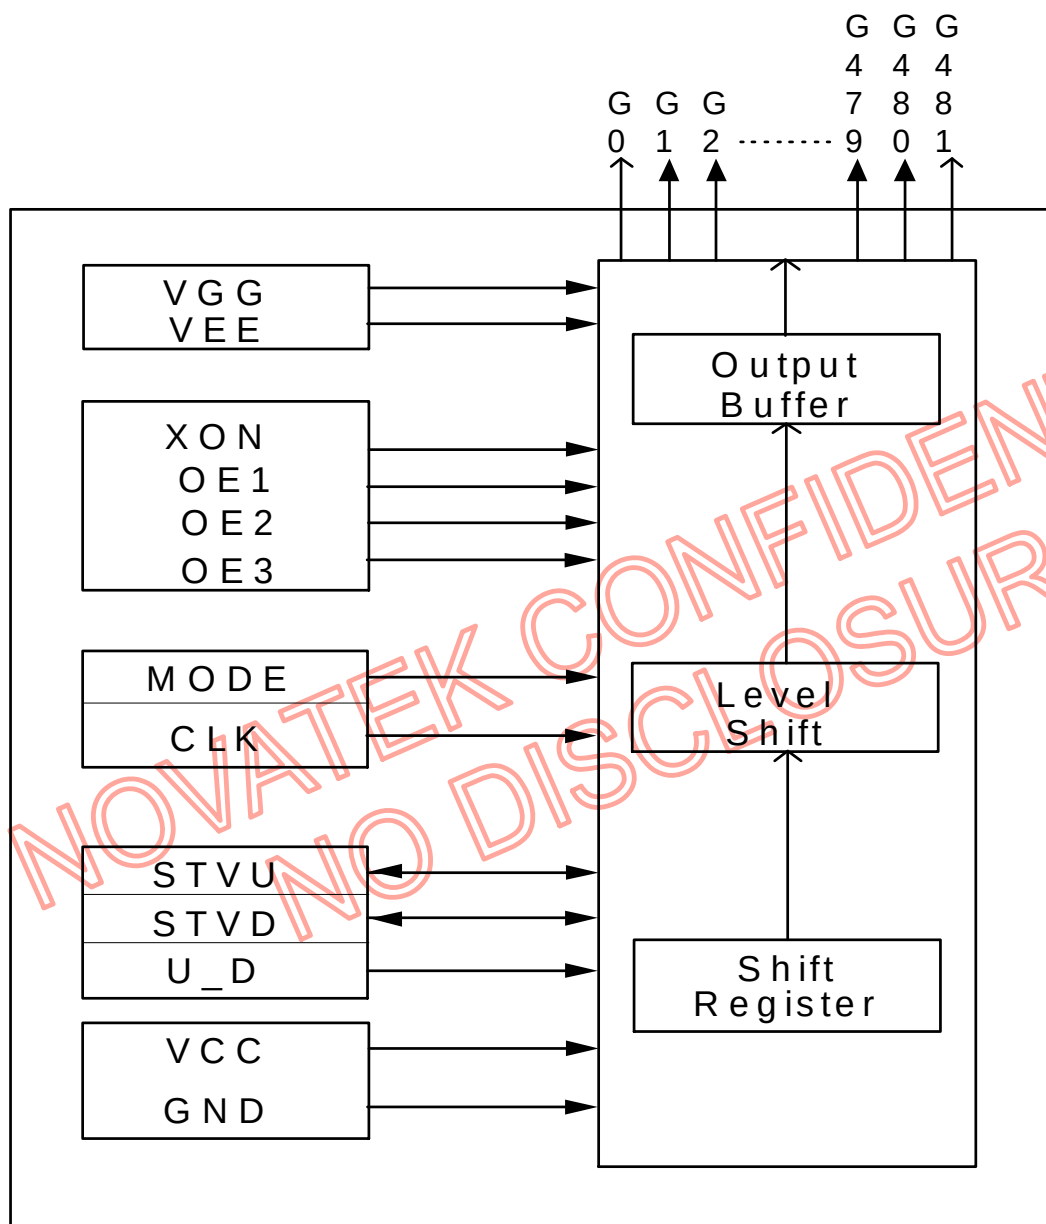

Pin Descriptions

Designation	I/O	Descriptions
XONR, XONL	I	Active Low, When XON goes low, all outputs are fixed to VGG. And there is a 200k ohm pull-up resistor with this pin. Xon signal has priority over OE.
OE1R, OE1L	I	Output enabled; these pads are shorted internally; active high. When this pin is applied to "1", the (3n+1) th channel output, n=0, 1, 2, ...159, are disabled (=VEE). This condition will not affect the operation of the internal registers. OE1 control is independent with the CLK. If only use one OE, these OE pins (OE1~3) have to be shorted together.
OE2R, OE2L	I	Output enabled; these pads are shorted internally; active high. When this pin is applied to "1", the (3n+2) th channel output, n=0, 1, 2, ...159, are disabled (=VEE). This condition will not affect the operation of the internal registers. OE2 control is independent with the CLK. If only use one OE, these OE pins (OE1~3) have to be shorted together.
OE3R, OE3L	I	Output enabled; these pads are shorted internally; active high. When this pin is applied to "1", the (3n+3) th channel output, n=0, 1, 2, ...159, are disabled (=VEE). This condition will not affect the operation of the internal registers. OE2 control is independent with the CLK. If only use one OE, these OE pins (OE1~3) have to be shorted together.
U_DR, U_DL	I	Shift up or down control. U_D = "H", up shift: STVD (Input) → G1 ~ G480 → STVU (Output) U_D = "L", down shift: STVU (Input) → G480 ~ G1 → STVD (Output)
CLKR, CLKL	I	Shift clock. Clock signal for internal shift register.
PATHR PATHL	-	Linked together internal.
STVD	I/O	It is an input pin to receive a start pulse when U_D = "1" or an output pin to shift a start pulse to the next stage when U_D = "0". The function is the same as STVU but logical inversion. Please refer to the descriptions of "STVU" and "U_D".
STVU	I/O	It is an input pin when U_D = "0". A "high" pulse is latched at the rising edge of the shift clock, CLK. After a start pulse, a serial pulses are shifted from G480 to G1, and STVD for the next stage. It is an output pin when U_D = "1". A start pulse is shifted for the next stage at the falling edge of the 480th clock of the shift clock.

MODER MODEL	I	Selecting the output mode: 480/320 channels, Normally pull– low . MODE="L": 320 channels (G161~G320 are disabled and fixed to VEE). Default setting is MODE="L" . MODE="H": 480 channels.																																																																																																				
		<table><tr><th>Output Channel</th><th>320CH (MODE="L")</th><th>480CH (MODE="H")</th><th>320CH OE Control</th><th>480CH OE Control</th></tr><tr><td>G1</td><td>1st</td><td>1st</td><td>OE1</td><td>OE1</td></tr><tr><td>G2</td><td>2nd</td><td>2nd</td><td>OE2</td><td>OE2</td></tr><tr><td>G3</td><td>3rd</td><td>3rd</td><td>OE3</td><td>OE3</td></tr><tr><td>:</td><td>:</td><td>:</td><td>:</td><td>:</td></tr><tr><td>G159</td><td>159th</td><td>159th</td><td>OE3</td><td>OE3</td></tr><tr><td>G160</td><td>160th</td><td>160th</td><td>OE1</td><td>OE1</td></tr><tr><td>G161</td><td>Fix to VEE</td><td>161th</td><td>-</td><td>OE2</td></tr><tr><td>G162</td><td>Fix to VEE</td><td>162th</td><td>-</td><td>OE3</td></tr><tr><td>G163</td><td>Fix to VEE</td><td>163th</td><td>-</td><td>OE1</td></tr><tr><td>:</td><td>:</td><td>:</td><td>:</td><td>:</td></tr><tr><td>G318</td><td>Fix to VEE</td><td>318th</td><td>-</td><td>OE3</td></tr><tr><td>G319</td><td>Fix to VEE</td><td>319th</td><td>-</td><td>OE1</td></tr><tr><td>G320</td><td>Fix to VEE</td><td>320th</td><td>-</td><td>OE2</td></tr><tr><td>G321</td><td>161th</td><td>321th</td><td>OE2</td><td>OE3</td></tr><tr><td>G322</td><td>162th</td><td>322th</td><td>OE3</td><td>OE1</td></tr><tr><td>:</td><td>:</td><td>:</td><td>:</td><td>:</td></tr><tr><td>G478</td><td>318th</td><td>478th</td><td>OE3</td><td>OE1</td></tr><tr><td>G479</td><td>319th</td><td>479th</td><td>OE1</td><td>OE2</td></tr><tr><td>G480</td><td>320th</td><td>480th</td><td>OE2</td><td>OE3</td></tr></table>	Output Channel	320CH (MODE="L")	480CH (MODE="H")	320CH OE Control	480CH OE Control	G1	1 st	1 st	OE1	OE1	G2	2 nd	2 nd	OE2	OE2	G3	3 rd	3 rd	OE3	OE3	:	:	:	:	:	G159	159 th	159 th	OE3	OE3	G160	160 th	160 th	OE1	OE1	G161	Fix to VEE	161 th	-	OE2	G162	Fix to VEE	162 th	-	OE3	G163	Fix to VEE	163 th	-	OE1	:	:	:	:	:	G318	Fix to VEE	318 th	-	OE3	G319	Fix to VEE	319 th	-	OE1	G320	Fix to VEE	320 th	-	OE2	G321	161 th	321 th	OE2	OE3	G322	162 th	322 th	OE3	OE1	:	:	:	:	:	G478	318 th	478 th	OE3	OE1	G479	319 th	479 th	OE1	OE2	G480	320 th	480 th	OE2	OE3
		Output Channel	320CH (MODE="L")	480CH (MODE="H")	320CH OE Control	480CH OE Control																																																																																																
		G1	1 st	1 st	OE1	OE1																																																																																																
		G2	2 nd	2 nd	OE2	OE2																																																																																																
		G3	3 rd	3 rd	OE3	OE3																																																																																																
		:	:	:	:	:																																																																																																
		G159	159 th	159 th	OE3	OE3																																																																																																
		G160	160 th	160 th	OE1	OE1																																																																																																
		G161	Fix to VEE	161 th	-	OE2																																																																																																
		G162	Fix to VEE	162 th	-	OE3																																																																																																
		G163	Fix to VEE	163 th	-	OE1																																																																																																
		:	:	:	:	:																																																																																																
		G318	Fix to VEE	318 th	-	OE3																																																																																																
		G319	Fix to VEE	319 th	-	OE1																																																																																																
		G320	Fix to VEE	320 th	-	OE2																																																																																																
		G321	161 th	321 th	OE2	OE3																																																																																																
		G322	162 th	322 th	OE3	OE1																																																																																																
		:	:	:	:	:																																																																																																
		G478	318 th	478 th	OE3	OE1																																																																																																
G479	319 th	479 th	OE1	OE2																																																																																																		
G480	320 th	480 th	OE2	OE3																																																																																																		
VGGR, VGGL	PI	Positive power supply for G1 ~ G480 outputs																																																																																																				
VEER, VEEL	PI	Negative power supply for G0 ~ G481 outputs																																																																																																				
VCCR, VCCL	PI	Power supply for digital circuit.																																																																																																				
GNDR, GNDL	PI	Ground pin																																																																																																				
G1 ~ G480	O	For driving LCD's gate signals, the output amplitude of these pins is VGG - VEE. Output timing of these signals is synchronous with the rising edge of shift clock.																																																																																																				
G0, G481	O	LCD panel auxiliary pins. Regardless of shift data, these pins output VEE level.																																																																																																				

- I : Input, O : Output, P : Power, D : Dummy, S : Shorted line, M : Mark, PI : Power input, PO : Power output,
 T : For testing, I/O : Input / Output. PS: Power Setting, C: Capacitor pin.
 ■ U_DL = U/DL , U_DR = U/DR , U_D=U/D

Pass line pin name

Pass Line No	Pad Name	
1	XONR	XONL
2	OE1R	OE1L
3	OE2R	OE2L
4	OE3R	OE3L
5	U_DR	U_DL
6	CLKR	CLKL
7	PATHR	PATHL
8	VGGR	VGGL
9	VCCR	VCCL
10	MODER	MODEL
11	VEER	VEEL

NOVATEK CONFIDENTIAL
NO DISCLOSURE



Functional Description

1. Power on/off sequence:


This IC is a high-voltage LCD driver, so it may be damaged by a large current flow if an incorrect power sequence is used. A recommended sequence is to connect the drive powers ,VEE & VGG , after the initialization of logic power, VCC.

For power-off sequence , either turning off logic system after shutting off the drive power or turning off all power simultaneously at the same time are suggested.


■ Power on sequence

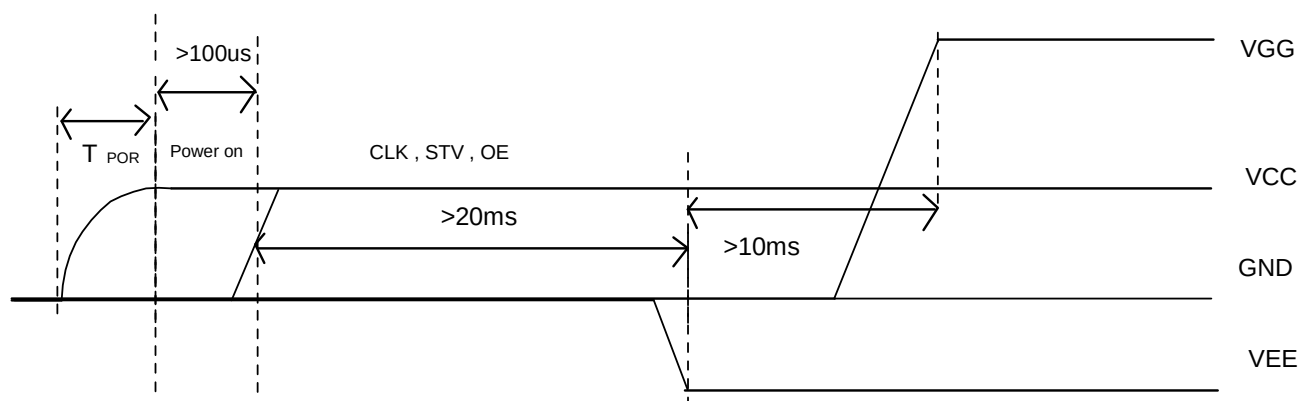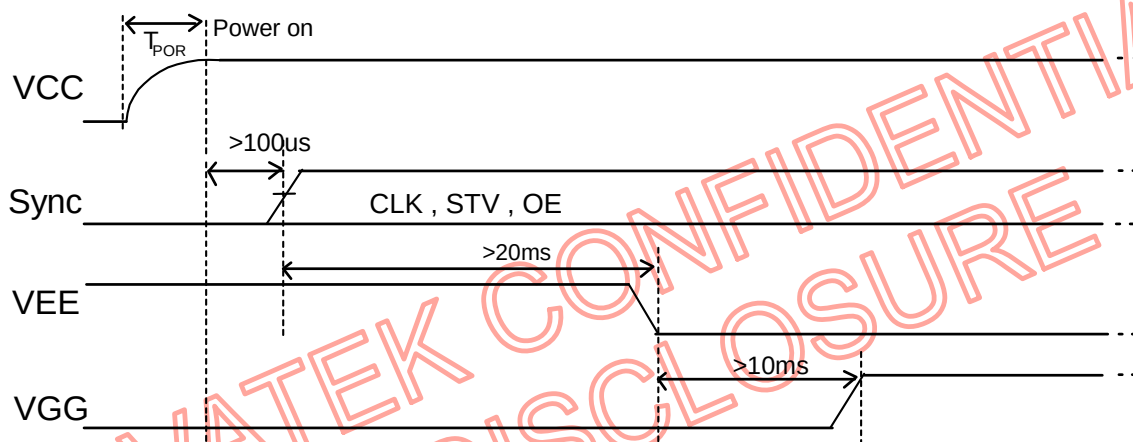

■ Power off sequence

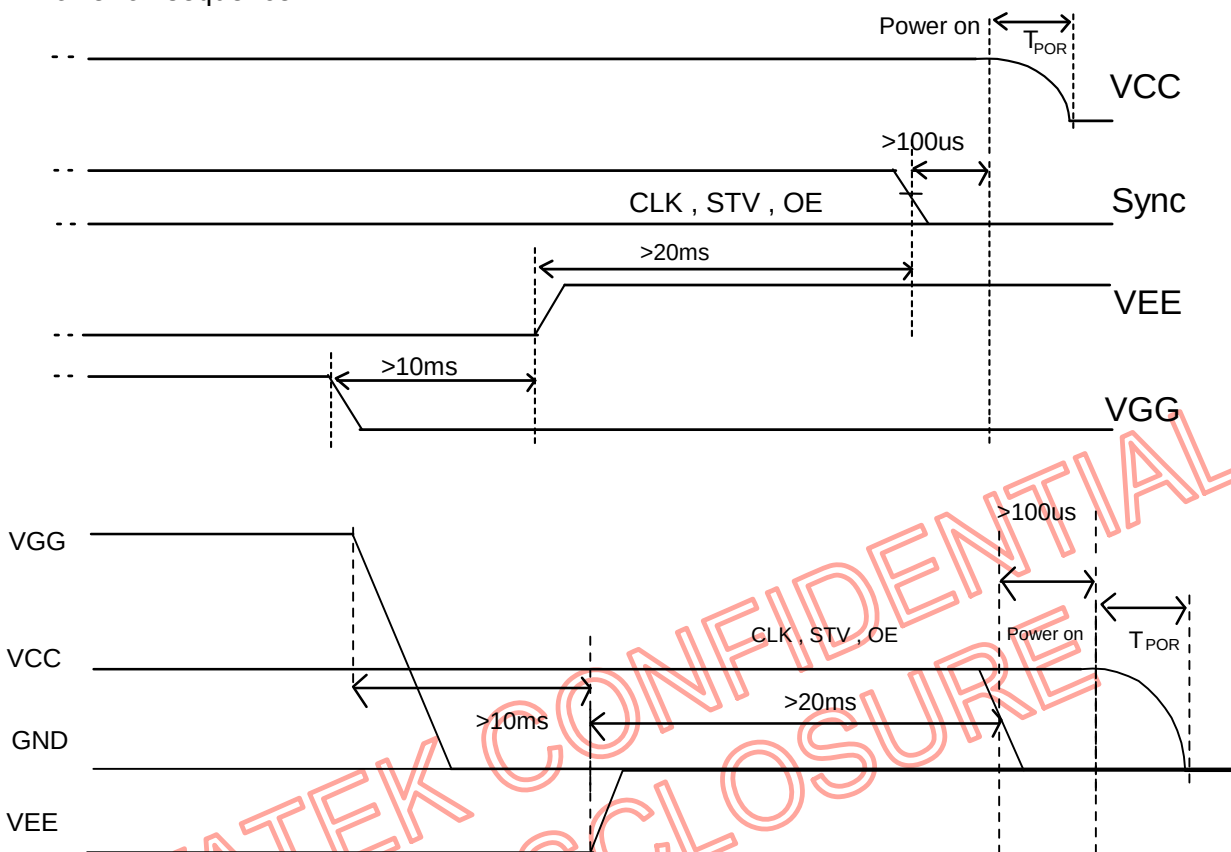

2. Power level:

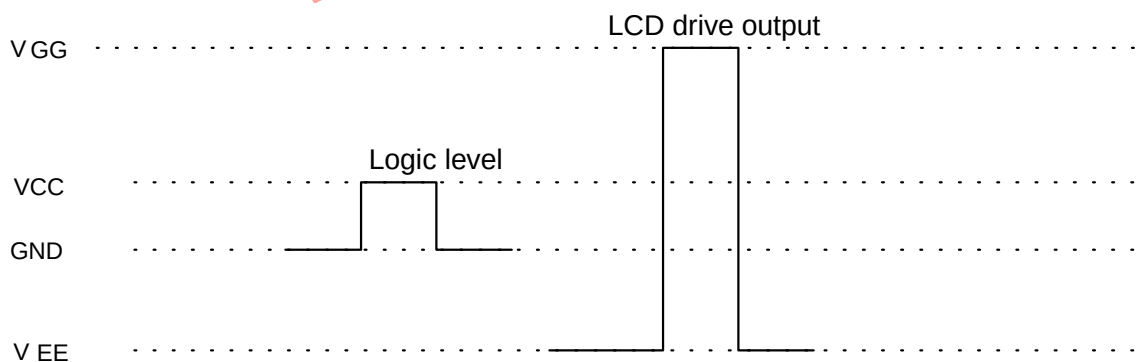

Note: For the input signals: CLK, XON, OE, U_D, STVD & STVU, MODE, "High" level=VCC, "Low" level=GND

Absolute Maximum Rating*

Logic supply voltage, VCC	- 0.3V to +6V
Supply voltage, VGG	- 0.3V to +40V
Supply voltage, VEE	- 20V to +0.3V
Supply range, VGG-VEE	- 0.3V to +40V
Operating temperature	-30 °C to 85 °C
Storage temperature	-55 °C to 125 °C

*Comments

Stresses above those listed under "Absolute Maximum Rating" may cause permanent damage to the device. These are stress ratings only. Functional operation of this device at these or any other conditions above those indicated in the operational sections of this specification is not implied and exposure to absolute maximum rating conditions for extended periods may affect device reliability.


DC Electrical Characteristics

Symbol	Parameters	Min.	Typ.	Max.	Unit	Conditions
VGG	VGG Voltage	7	-	VEE +40	V	
VEE	VEE Voltage	-20	-	-5	V	
Vxo	Voltage Range of VGG - VEE	12	-	40	V	VCC = 3.3V
VCC	VCC Supplied Voltage	2.7	3.3	3.6	V	
VIH	High Level Input Voltage	0.7 X VCC	-	VCC	V	VCC = 3.3V
VIL	Low Level Input Voltage	0	-	0.3 X VCC	V	VCC = 3.3V
IXOH	High Level Output Current	0.5	-	-	mA	Driving current, VO = VGG -0.5V
IXOL	Low Level Output Current	-0.5	-	-	mA	Sink current, VO = VEE + 0.5V
IPOH	High Level Output Current	200	-	-	uA	STVD/STVU, VO = VCC - 0.3V
IPOL	Low Level Output Current	-200	-	-	uA	STVD/STVU, VO = 0.3V
Rin	Pull-up Impedance	70K	200K	-	ohm	XON , MODER,MODEL
IIL	Input Leakage Current	-	-	± 1	uA	Except XON & MODER,MODEL
ICC	Operating Current Consumption	-	-	50	uA	VCC=3.3V, Fclk=20KHz, No load
IGG	Operating Current Consumption	-	-	100	uA	VGG=25V, Fclk=20KHz, No load
IEE	Operating Current Consumption	-	-	-100	uA	VEE=-15V, Fclk=20KHz, No load


AC Characteristics (VGG=25V, VEE=-15V, VCC=3.3V, GND=0V, TA= 25 °C)

Symbol	Parameters	Min.	Typ.	Max.	Unit	Conditions
Tdt	STVD/STVU Delay Time	-	-	500	ns	CL = 20pF
Tdo	Driver Output Delay Time	-	-	900	ns	CL = 220pF
Tthl	Output Falling Time	-	400	800	ns	CL = 220pF, 90% to 10%
Ttlh	Output Rise Time	-	500	1000	ns	CL = 220pF, 10% to 90%
Txon	XON to Driver Output Delay Time	-	-	10	us	CL = 220pF
Toe	OE to Driver Output Delay Time	-	-	900	ns	CL = 220pF
Fclk	Clock Frequency	-	-	200	KHz	In cascade connection
Trck	Clock Rise Time	-	-	100	ns	CL = 20pF
Tfck	Clock Falling Time	-	-	100	ns	CL = 20pF
PWCLK	Clock Pulse Width (High period or Low period)	500	-	-	ns	
Tsu	STVD/STVU Set-up Time	200	-	-	ns	
Thd	STVD/STVU Hold Time	300	-	-	ns	
Twcl	Output Enabled pulse width	1	-	-	us	
T _{POR}	Power-On Reset slew time	-	-	5	ms	From 0V to 90% VCC

Timing Waveforms

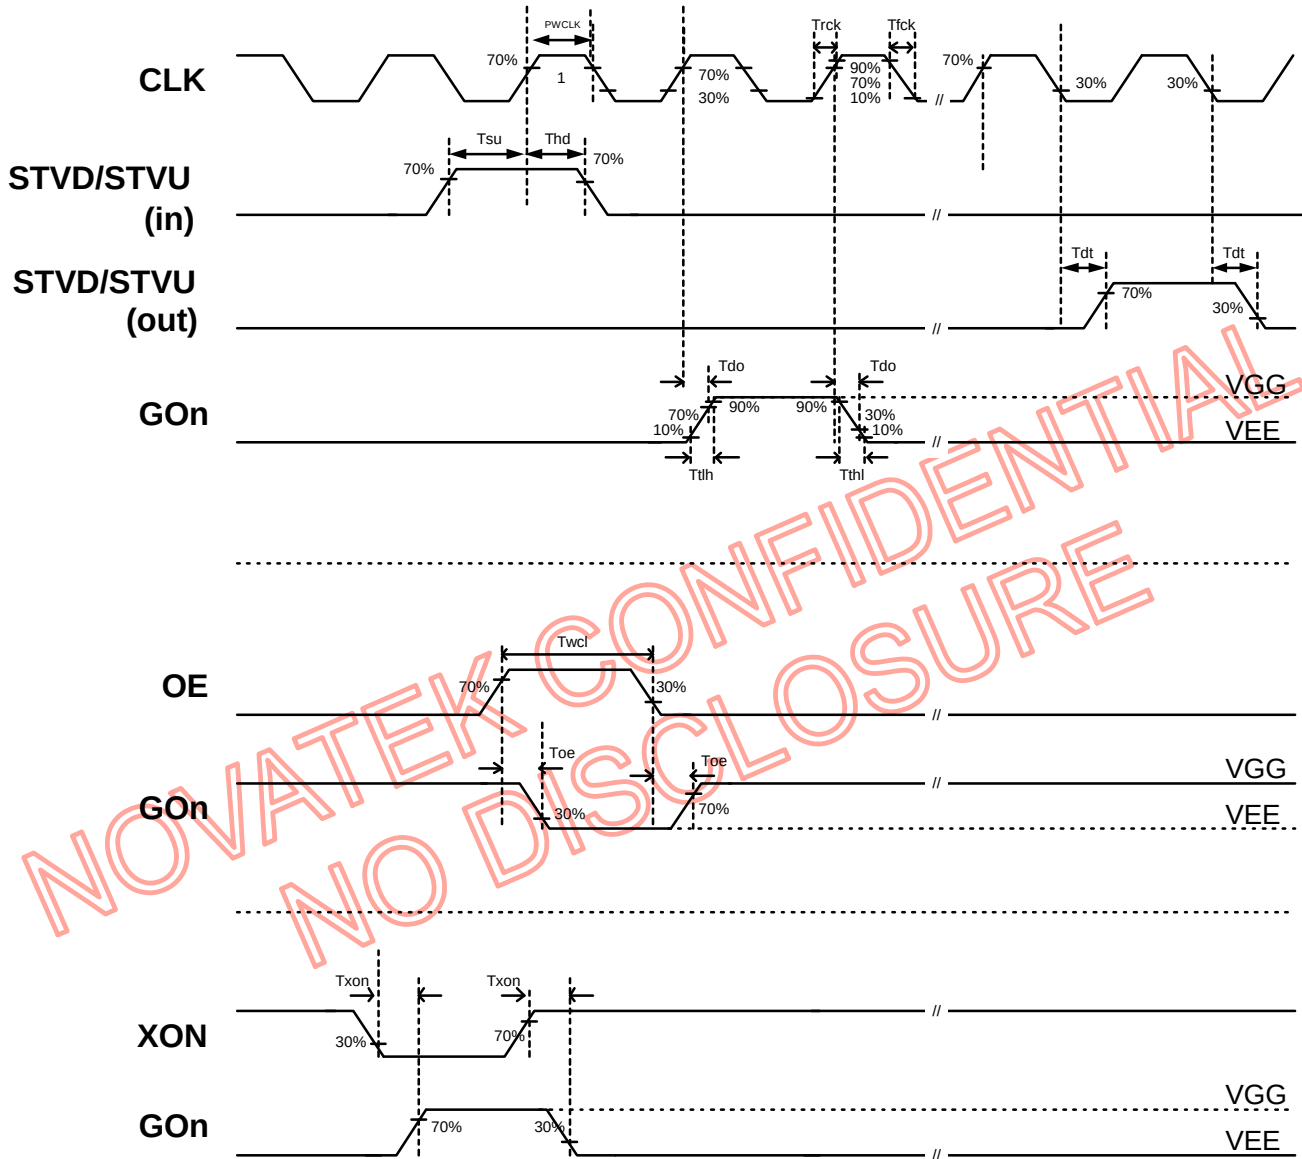


1. U/D = "H"

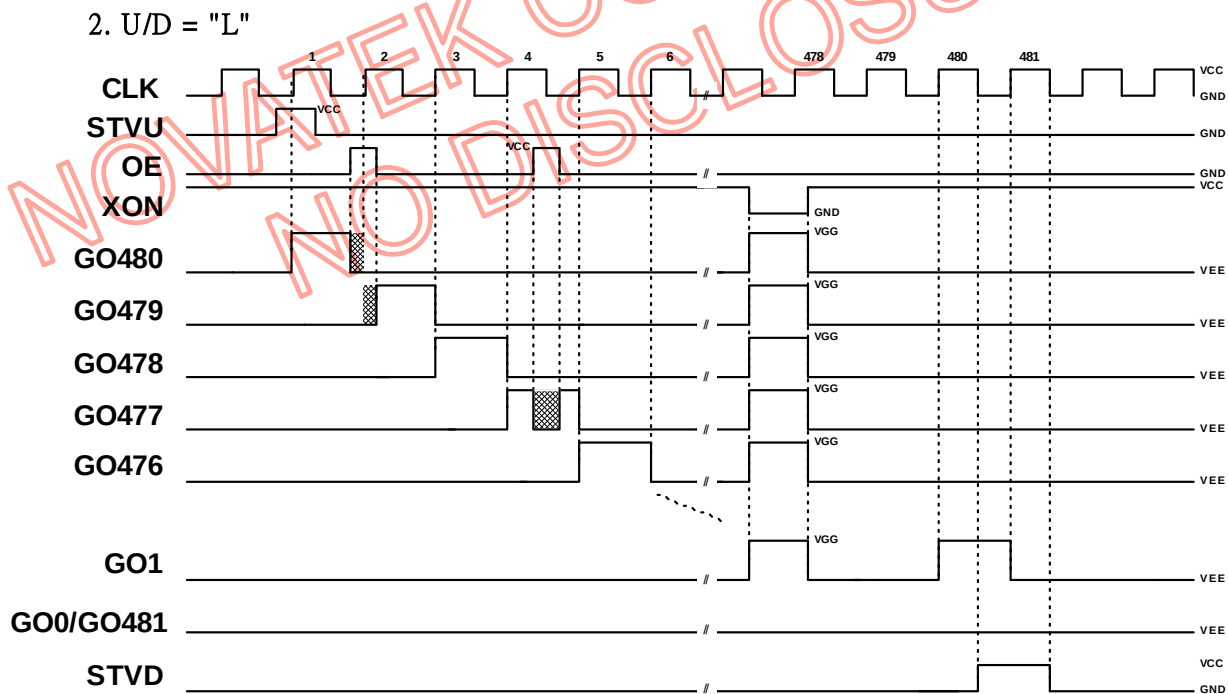


Ver.0.11

Operation(Double-pulse)

1. U/D = "H"

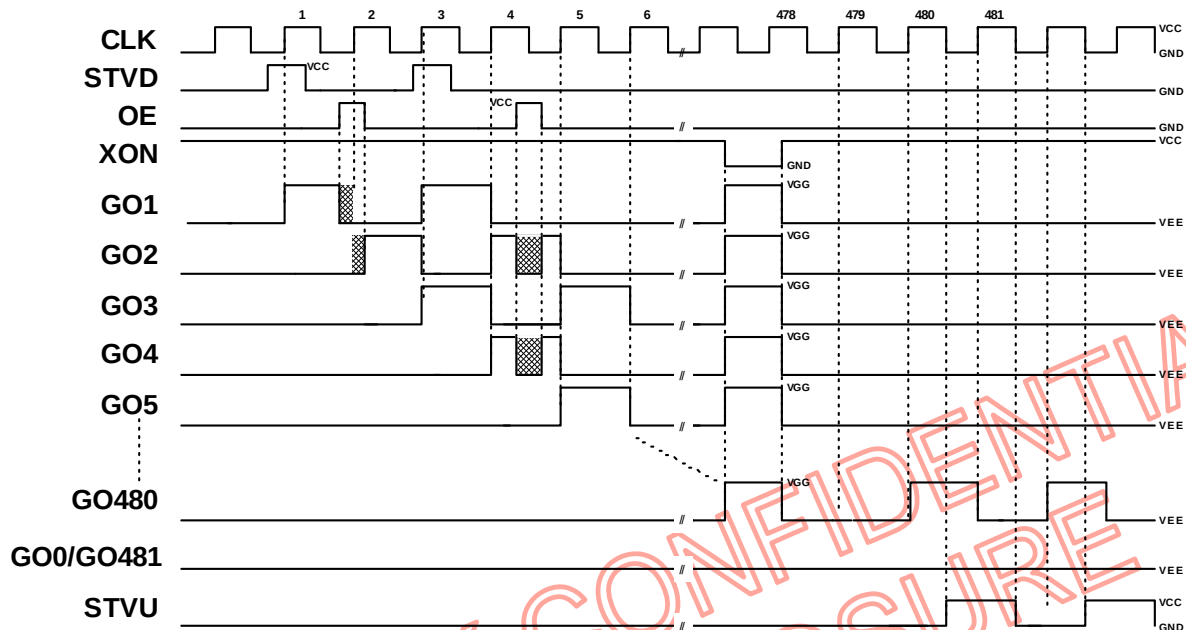


2. U/D = "L"

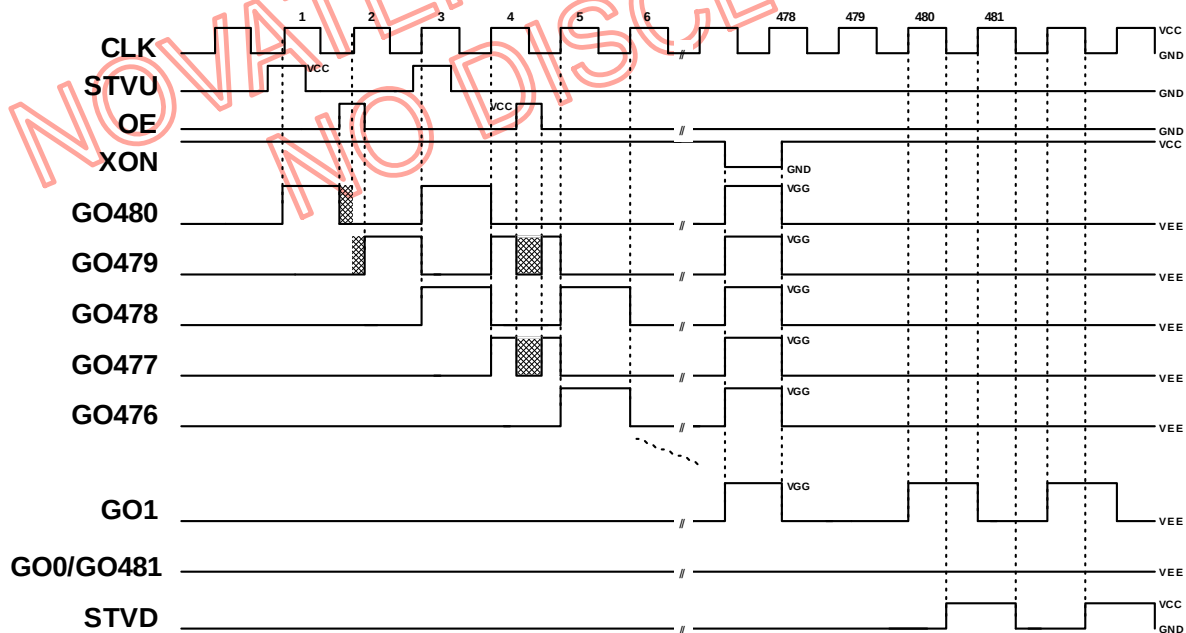


▨ : Deleted from normal output by OE

Operation(long start pulse)(2CKV)

1. U/D = "H"

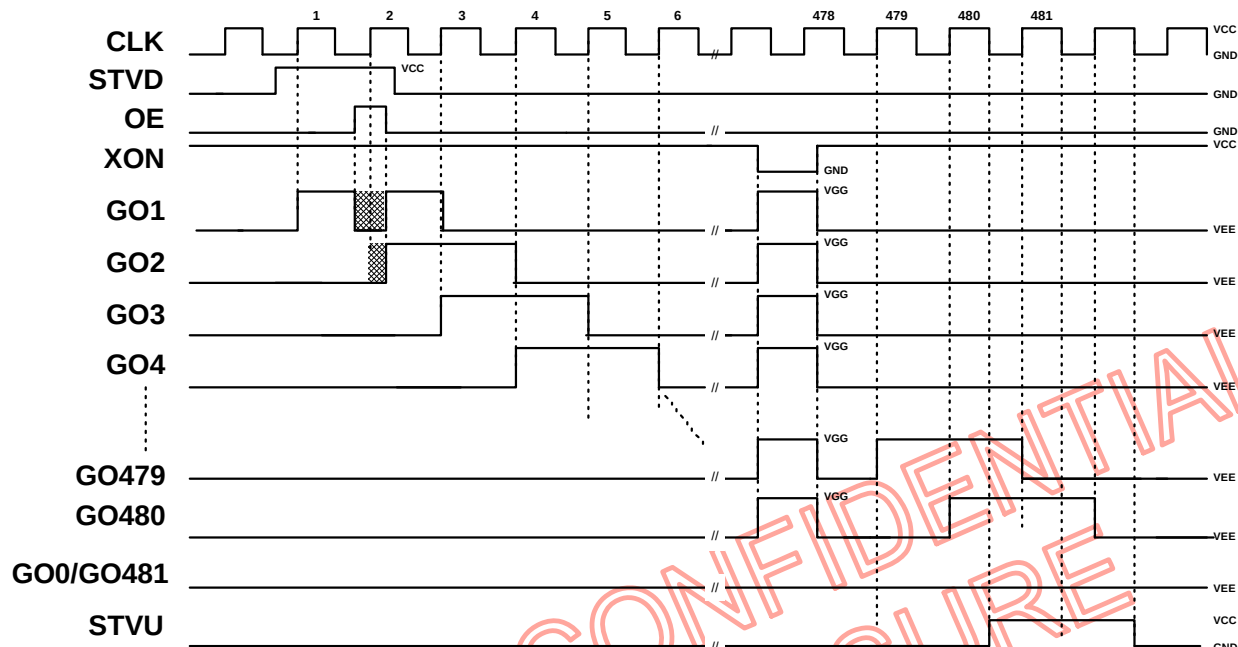


2. U/D = "L"

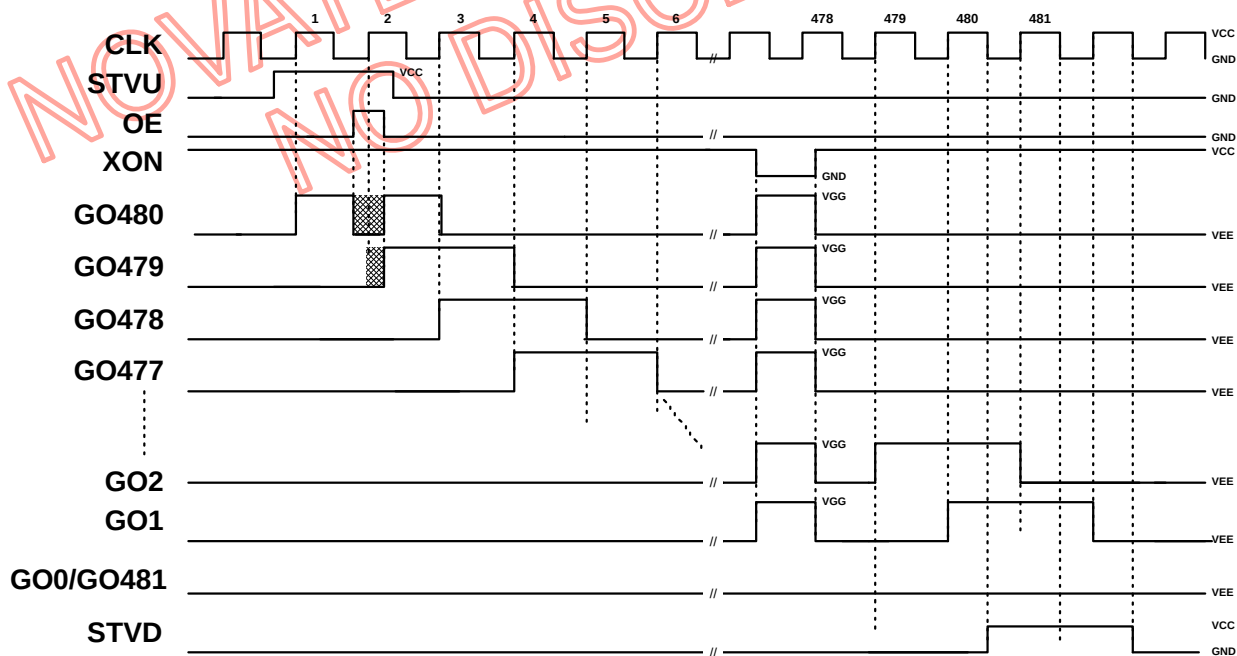


■ : Deleted from normal output by OE

Operation(long start pulse)(3CKV)



1. U/D = "H"

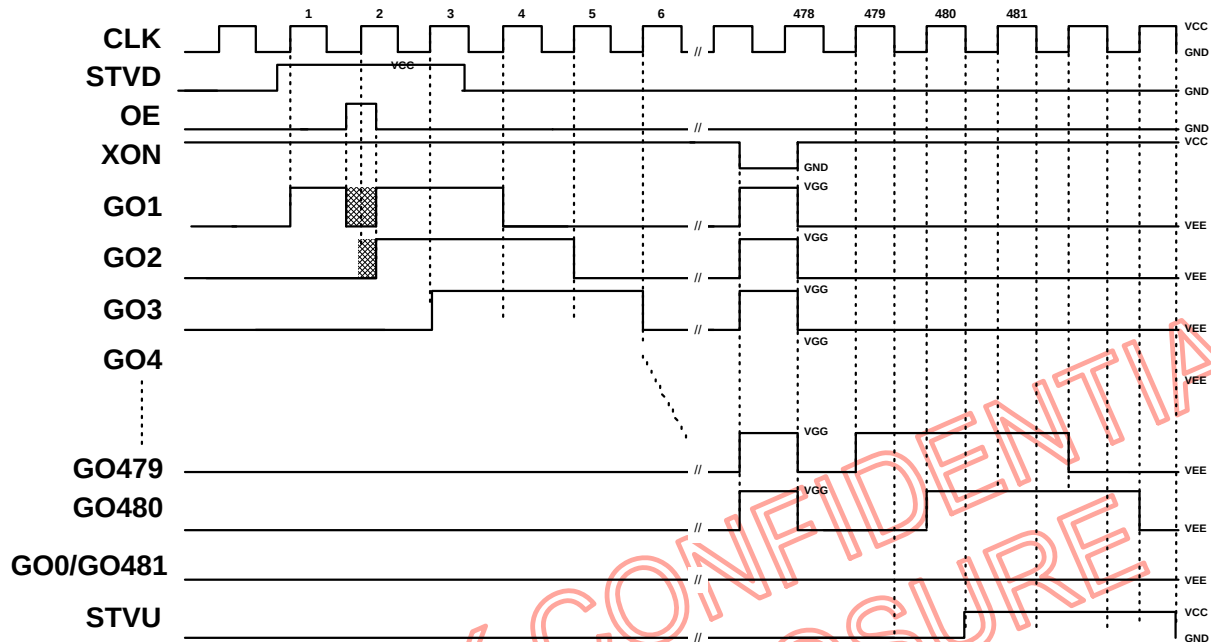

2. U/D = "L"

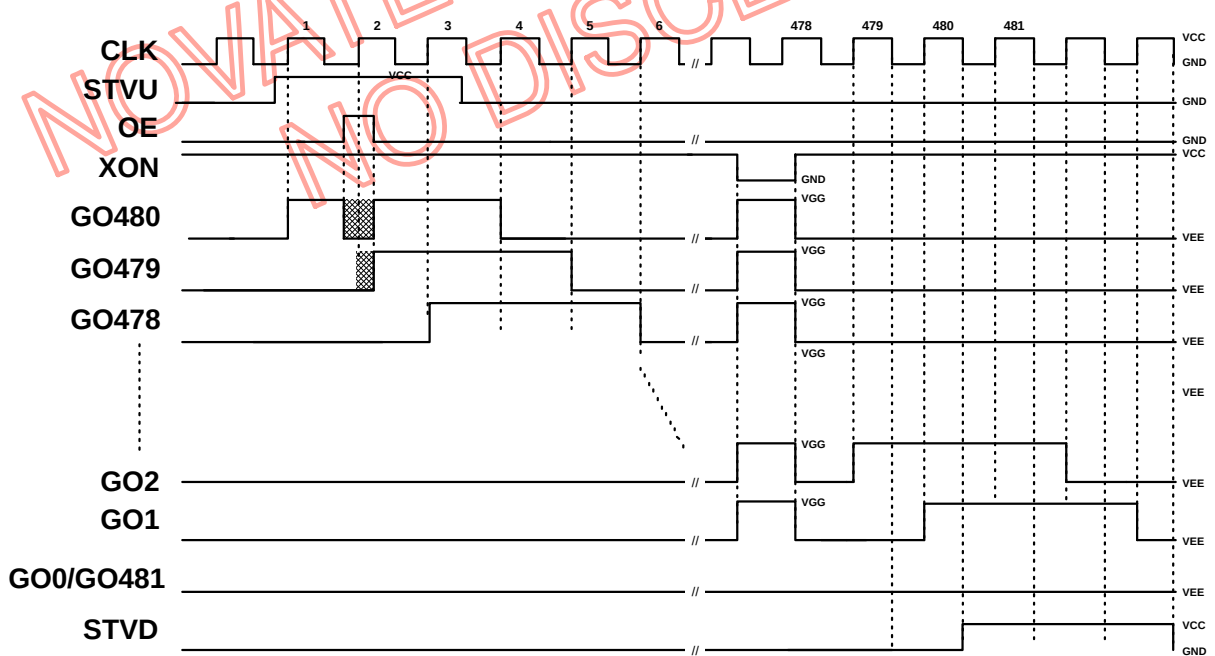


▣ : Deleted from normal output by OE

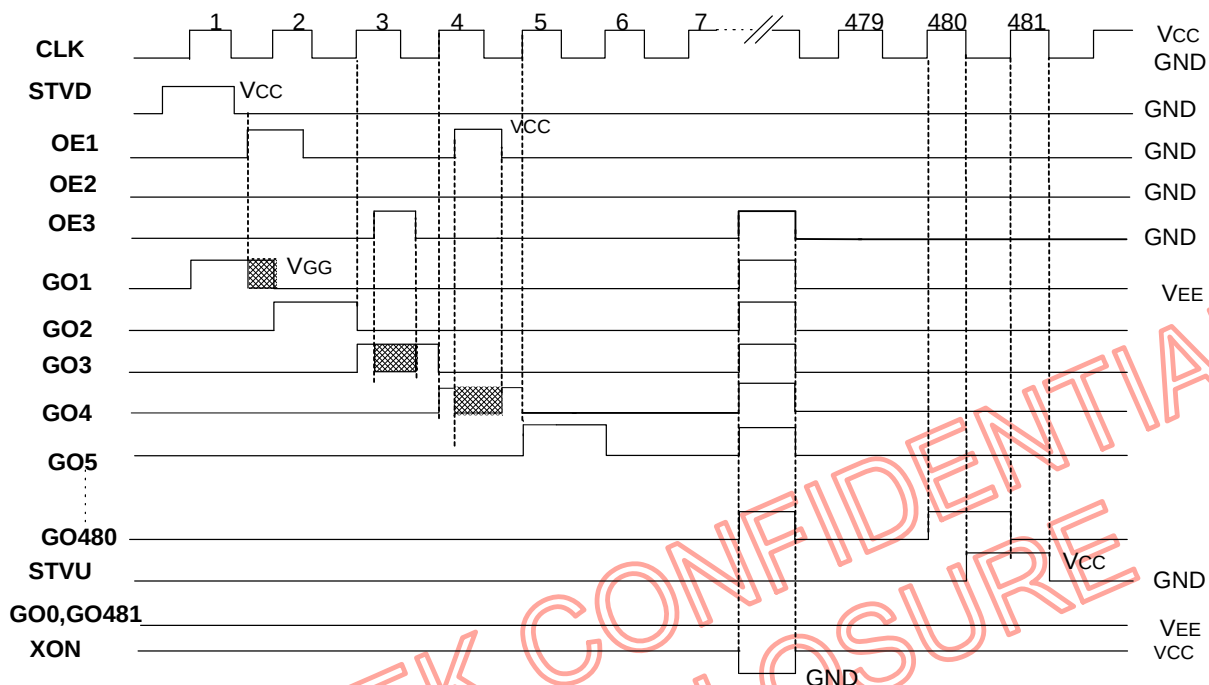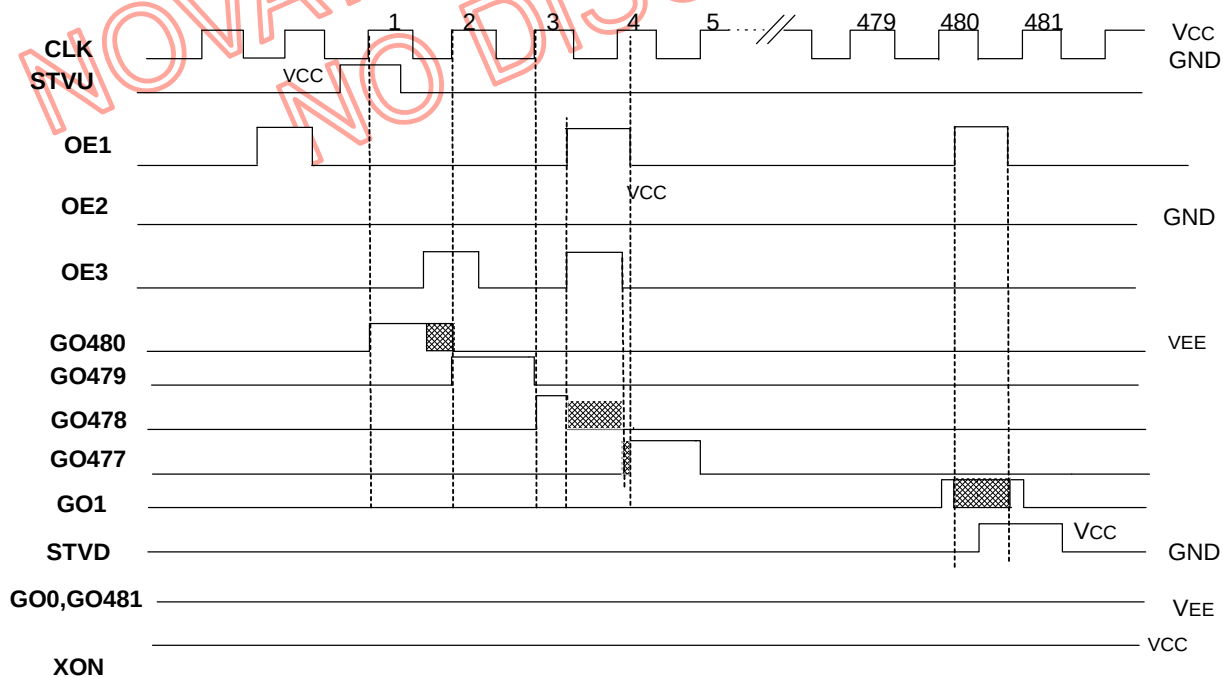Operation(3 OE)
1. U_D = 'H'

2. U_D = 'L'


▨ : Deleted from normal output by OEx

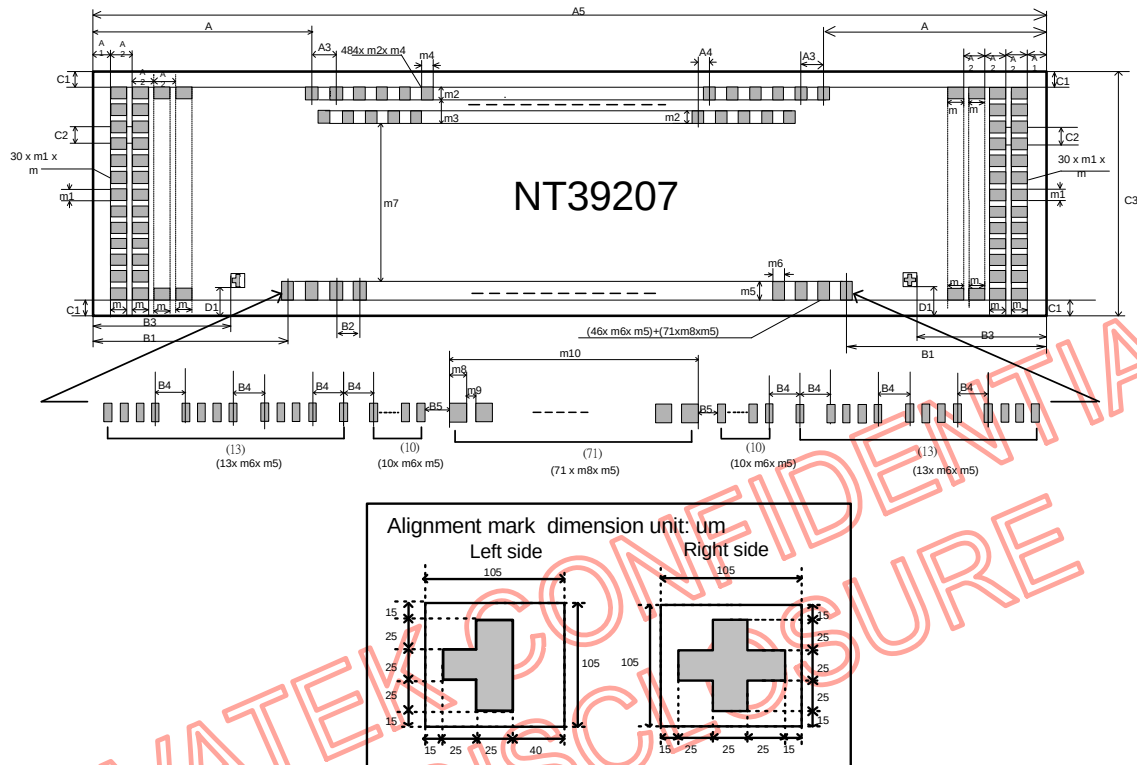Chip Outline Dimensions



Symbol	Dimensions in μm	Symbol	Dimensions in μm
A	710	D1	105
A1	70	m	50
A2	65	m1	45
A3	50	m2	84
A4	25	m3	119
A5	13520	m4	25
B1	666	m5	85
B2	52	m6	40
B3	440	m7	609
B4	80	m8	105
B5	40.5	m9	30
C1	70	m10	9555
C2	71		
C3	1037		

Bonding Diagram

No.	TextName	CX	CY
1	XONL	-6665	426
2	XONL	-6600	426
3	XONL	-6535	426
4	XONL	-6470	426
5	OE1L	-6665	355
6	OE1L	-6600	355
7	OE2L	-6665	284
8	OE2L	-6600	284
9	OE3L	-6665	213
10	OE3L	-6600	213
11	U/DL	-6665	142
12	U/DL	-6600	142
13	CLKL	-6665	71
14	CLKL	-6600	71
15	PATHL	-6665	0
16	PATHL	-6600	0
17	STVU	-6665	-71
18	STVU	-6600	-71
19	VGGL	-6665	-142
20	VGGL	-6600	-142
21	VGGL	-6665	-213
22	VGGL	-6600	-213
23	VCCL	-6665	-284
24	VCCL	-6600	-284
25	VCCL	-6665	-355
26	VCCL	-6600	-355
27	MODEL	-6665	-426
28	MODEL	-6600	-426
29	MODEL	-6535	-426
30	MODEL	-6470	-426
31	VEEL	-6094	-406
32	VEEL	-6042	-406
33	VEEL	-5990	-406
34	VEEL	-5938	-406
35	VGGL	-5858	-406
36	VGGL	-5806	-406
37	VGGL	-5754	-406
38	VGGL	-5702	-406
39	VCCL	-5622	-406
40	VCCL	-5570	-406

No.	TextName	CX	CY
41	VCCL	-5518	-406
42	VCCL	-5466	-406
43	MODEL	-5386	-406
44	GNDL	-5306	-406
45	GNDL	-5254	-406
46	GNDL	-5202	-406
47	GNDL	-5150	-406
48	GNDL	-5098	-406
49	GNDL	-5046	-406
50	GNDL	-4994	-406
51	GNDL	-4942	-406
52	GNDL	-4890	-406
53	GNDL	-4838	-406
54	DUMMY[1]	-4725	-406
55	DUMMY[2]	-4590	-406
56	DUMMY[3]	-4455	-406
57	DUMMY[4]	-4320	-406
58	DUMMY[5]	-4185	-406
59	DUMMY[6]	-4050	-406
60	DUMMY[7]	-3915	-406
61	DUMMY[8]	-3780	-406
62	DUMMY[9]	-3645	-406
63	DUMMY[10]	-3510	-406
64	DUMMY[11]	-3375	-406
65	DUMMY[12]	-3240	-406
66	DUMMY[13]	-3105	-406
67	DUMMY[14]	-2970	-406
68	DUMMY[15]	-2835	-406
69	DUMMY[16]	-2700	-406
70	DUMMY[17]	-2565	-406
71	DUMMY[18]	-2430	-406
72	DUMMY[19]	-2295	-406
73	DUMMY[20]	-2160	-406
74	DUMMY[21]	-2025	-406
75	DUMMY[22]	-1890	-406
76	DUMMY[23]	-1755	-406
77	DUMMY[24]	-1620	-406
78	DUMMY[25]	-1485	-406
79	DUMMY[26]	-1350	-406
80	DUMMY[27]	-1215	-406

No.	TextName	CX	CY
81	DUMMY[28]	-1080	-406
82	DUMMY[29]	-945	-406
83	DUMMY[30]	-810	-406
84	DUMMY[31]	-675	-406
85	DUMMY[32]	-540	-406
86	DUMMY[33]	-405	-406
87	DUMMY[34]	-270	-406
88	DUMMY[35]	-135	-406
89	DUMMY[36]	0	-406
90	DUMMY[37]	135	-406
91	DUMMY[38]	270	-406
92	DUMMY[39]	405	-406
93	DUMMY[40]	540	-406
94	DUMMY[41]	675	-406
95	DUMMY[42]	810	-406
96	DUMMY[43]	945	-406
97	DUMMY[44]	1080	-406
98	DUMMY[45]	1215	-406
99	DUMMY[46]	1350	-406
100	DUMMY[47]	1485	-406
101	DUMMY[48]	1620	-406
102	DUMMY[49]	1755	-406
103	DUMMY[50]	1890	-406
104	DUMMY[51]	2025	-406
105	DUMMY[52]	2160	-406
106	DUMMY[53]	2295	-406
107	DUMMY[54]	2430	-406
108	DUMMY[55]	2565	-406
109	DUMMY[56]	2700	-406
110	DUMMY[57]	2835	-406
111	DUMMY[58]	2970	-406
112	DUMMY[59]	3105	-406
113	DUMMY[60]	3240	-406
114	DUMMY[61]	3375	-406
115	DUMMY[62]	3510	-406
116	DUMMY[63]	3645	-406
117	DUMMY[64]	3780	-406
118	DUMMY[65]	3915	-406
119	DUMMY[66]	4050	-406
120	DUMMY[67]	4185	-406

No.	TextName	CX	CY	No.	TextName	CX	CY	No.	TextName	CX	CY
121	DUMMY[68]	4320	-406	161	STVD	6600	-71	201	G[22]	5450	406.5
122	DUMMY[69]	4455	-406	162	PATHR	6665	0	202	G[23]	5425	287.5
123	DUMMY[70]	4590	-406	163	PATHR	6600	0	203	G[24]	5400	406.5
124	DUMMY[71]	4725	-406	164	CLKR	6665	71	204	G[25]	5375	287.5
125	GNDR	4838	-406	165	CLKR	6600	71	205	G[26]	5350	406.5
126	GNDR	4890	-406	166	U/DR	6665	142	206	G[27]	5325	287.5
127	GNDR	4942	-406	167	U/DR	6600	142	207	G[28]	5300	406.5
128	GNDR	4994	-406	168	OE3R	6665	213	208	G[29]	5275	287.5
129	GNDR	5046	-406	169	OE3R	6600	213	209	G[30]	5250	406.5
130	GNDR	5098	-406	170	OE2R	6665	284	210	G[31]	5225	287.5
131	GNDR	5150	-406	171	OE2R	6600	284	211	G[32]	5200	406.5
132	GNDR	5202	-406	172	OE1R	6665	355	212	G[33]	5175	287.5
133	GNDR	5254	-406	173	OE1R	6600	355	213	G[34]	5150	406.5
134	GNDR	5306	-406	174	XONR	6665	426	214	G[35]	5125	287.5
135	MODER	5386	-406	175	XONR	6600	426	215	G[36]	5100	406.5
136	VCCR	5622	-406	176	XONR	6535	426	216	G[37]	5075	287.5
137	VCCR	5570	-406	177	XONR	6470	426	217	G[38]	5050	406.5
138	VCCR	5518	-406	178	DUMMY[72]	6050	406.5	218	G[39]	5025	287.5
139	VCCR	5466	-406	179	G[0]	6000	406.5	219	G[40]	5000	406.5
140	VGGR	5858	-406	180	G[1]	5975	287.5	220	G[41]	4975	287.5
141	VGGR	5806	-406	181	G[2]	5950	406.5	221	G[42]	4950	406.5
142	VGGR	5754	-406	182	G[3]	5925	287.5	222	G[43]	4925	287.5
143	VGGR	5702	-406	183	G[4]	5900	406.5	223	G[44]	4900	406.5
144	VEER	6094	-406	184	G[5]	5875	287.5	224	G[45]	4875	287.5
145	VEER	6042	-406	185	G[6]	5850	406.5	225	G[46]	4850	406.5
146	VEER	5990	-406	186	G[7]	5825	287.5	226	G[47]	4825	287.5
147	VEER	5938	-406	187	G[8]	5800	406.5	227	G[48]	4800	406.5
148	MODER	6470	-426	188	G[9]	5775	287.5	228	G[49]	4775	287.5
149	MODER	6535	-426	189	G[10]	5750	406.5	229	G[50]	4750	406.5
150	MODER	6600	-426	190	G[11]	5725	287.5	230	G[51]	4725	287.5
151	MODER	6665	-426	191	G[12]	5700	406.5	231	G[52]	4700	406.5
152	VCCR	6665	-355	192	G[13]	5675	287.5	232	G[53]	4675	287.5
153	VCCR	6600	-355	193	G[14]	5650	406.5	233	G[54]	4650	406.5
154	VCCR	6665	-284	194	G[15]	5625	287.5	234	G[55]	4625	287.5
155	VCCR	6600	-284	195	G[16]	5600	406.5	235	G[56]	4600	406.5
156	VGGR	6665	-213	196	G[17]	5575	287.5	236	G[57]	4575	287.5
157	VGGR	6600	-213	197	G[18]	5550	406.5	237	G[58]	4550	406.5
158	VGGR	6665	-142	198	G[19]	5525	287.5	238	G[59]	4525	287.5
159	VGGR	6600	-142	199	G[20]	5500	406.5	239	G[60]	4500	406.5
160	STVD	6665	-71	200	G[21]	5475	287.5	240	G[61]	4475	287.5

No.	TextName	CX	CY
241	G[62]	4450	406.5
242	G[63]	4425	287.5
243	G[64]	4400	406.5
244	G[65]	4375	287.5
245	G[66]	4350	406.5
246	G[67]	4325	287.5
247	G[68]	4300	406.5
248	G[69]	4275	287.5
249	G[70]	4250	406.5
250	G[71]	4225	287.5
251	G[72]	4200	406.5
252	G[73]	4175	287.5
253	G[74]	4150	406.5
254	G[75]	4125	287.5
255	G[76]	4100	406.5
256	G[77]	4075	287.5
257	G[78]	4050	406.5
258	G[79]	4025	287.5
259	G[80]	4000	406.5
260	G[81]	3975	287.5
261	G[82]	3950	406.5
262	G[83]	3925	287.5
263	G[84]	3900	406.5
264	G[85]	3875	287.5
265	G[86]	3850	406.5
266	G[87]	3825	287.5
267	G[88]	3800	406.5
268	G[89]	3775	287.5
269	G[90]	3750	406.5
270	G[91]	3725	287.5
271	G[92]	3700	406.5
272	G[93]	3675	287.5
273	G[94]	3650	406.5
274	G[95]	3625	287.5
275	G[96]	3600	406.5
276	G[97]	3575	287.5
277	G[98]	3550	406.5
278	G[99]	3525	287.5
279	G[100]	3500	406.5
280	G[101]	3475	287.5

No.	TextName	CX	CY
281	G[102]	3450	406.5
282	G[103]	3425	287.5
283	G[104]	3400	406.5
284	G[105]	3375	287.5
285	G[106]	3350	406.5
286	G[107]	3325	287.5
287	G[108]	3300	406.5
288	G[109]	3275	287.5
289	G[110]	3250	406.5
290	G[111]	3225	287.5
291	G[112]	3200	406.5
292	G[113]	3175	287.5
293	G[114]	3150	406.5
294	G[115]	3125	287.5
295	G[116]	3100	406.5
296	G[117]	3075	287.5
297	G[118]	3050	406.5
298	G[119]	3025	287.5
299	G[120]	3000	406.5
300	G[121]	2975	287.5
301	G[122]	2950	406.5
302	G[123]	2925	287.5
303	G[124]	2900	406.5
304	G[125]	2875	287.5
305	G[126]	2850	406.5
306	G[127]	2825	287.5
307	G[128]	2800	406.5
308	G[129]	2775	287.5
309	G[130]	2750	406.5
310	G[131]	2725	287.5
311	G[132]	2700	406.5
312	G[133]	2675	287.5
313	G[134]	2650	406.5
314	G[135]	2625	287.5
315	G[136]	2600	406.5
316	G[137]	2575	287.5
317	G[138]	2550	406.5
318	G[139]	2525	287.5
319	G[140]	2500	406.5
320	G[141]	2475	287.5

No.	TextName	CX	CY
321	G[142]	2450	406.5
322	G[143]	2425	287.5
323	G[144]	2400	406.5
324	G[145]	2375	287.5
325	G[146]	2350	406.5
326	G[147]	2325	287.5
327	G[148]	2300	406.5
328	G[149]	2275	287.5
329	G[150]	2250	406.5
330	G[151]	2225	287.5
331	G[152]	2200	406.5
332	G[153]	2175	287.5
333	G[154]	2150	406.5
334	G[155]	2125	287.5
335	G[156]	2100	406.5
336	G[157]	2075	287.5
337	G[158]	2050	406.5
338	G[159]	2025	287.5
339	G[160]	2000	406.5
340	G[161]	1975	287.5
341	G[162]	1950	406.5
342	G[163]	1925	287.5
343	G[164]	1900	406.5
344	G[165]	1875	287.5
345	G[166]	1850	406.5
346	G[167]	1825	287.5
347	G[168]	1800	406.5
348	G[169]	1775	287.5
349	G[170]	1750	406.5
350	G[171]	1725	287.5
351	G[172]	1700	406.5
352	G[173]	1675	287.5
353	G[174]	1650	406.5
354	G[175]	1625	287.5
355	G[176]	1600	406.5
356	G[177]	1575	287.5
357	G[178]	1550	406.5
358	G[179]	1525	287.5
359	G[180]	1500	406.5
360	G[181]	1475	287.5

No.	TextName	CX	CY	No.	TextName	CX	CY	No.	TextName	CX	CY
361	G[182]	1450	406.5	401	G[222]	450	406.5	441	G[262]	-550	406.5
362	G[183]	1425	287.5	402	G[223]	425	287.5	442	G[263]	-575	287.5
363	G[184]	1400	406.5	403	G[224]	400	406.5	443	G[264]	-600	406.5
364	G[185]	1375	287.5	404	G[225]	375	287.5	444	G[265]	-625	287.5
365	G[186]	1350	406.5	405	G[226]	350	406.5	445	G[266]	-650	406.5
366	G[187]	1325	287.5	406	G[227]	325	287.5	446	G[267]	-675	287.5
367	G[188]	1300	406.5	407	G[228]	300	406.5	447	G[268]	-700	406.5
368	G[189]	1275	287.5	408	G[229]	275	287.5	448	G[269]	-725	287.5
369	G[190]	1250	406.5	409	G[230]	250	406.5	449	G[270]	-750	406.5
370	G[191]	1225	287.5	410	G[231]	225	287.5	450	G[271]	-775	287.5
371	G[192]	1200	406.5	411	G[232]	200	406.5	451	G[272]	-800	406.5
372	G[193]	1175	287.5	412	G[233]	175	287.5	452	G[273]	-825	287.5
373	G[194]	1150	406.5	413	G[234]	150	406.5	453	G[274]	-850	406.5
374	G[195]	1125	287.5	414	G[235]	125	287.5	454	G[275]	-875	287.5
375	G[196]	1100	406.5	415	G[236]	100	406.5	455	G[276]	-900	406.5
376	G[197]	1075	287.5	416	G[237]	75	287.5	456	G[277]	-925	287.5
377	G[198]	1050	406.5	417	G[238]	50	406.5	457	G[278]	-950	406.5
378	G[199]	1025	287.5	418	G[239]	25	287.5	458	G[279]	-975	287.5
379	G[200]	1000	406.5	419	G[240]	0	406.5	459	G[280]	-1000	406.5
380	G[201]	975	287.5	420	G[241]	-25	287.5	460	G[281]	-1025	287.5
381	G[202]	950	406.5	421	G[242]	-50	406.5	461	G[282]	-1050	406.5
382	G[203]	925	287.5	422	G[243]	-75	287.5	462	G[283]	-1075	287.5
383	G[204]	900	406.5	423	G[244]	-100	406.5	463	G[284]	-1100	406.5
384	G[205]	875	287.5	424	G[245]	-125	287.5	464	G[285]	-1125	287.5
385	G[206]	850	406.5	425	G[246]	-150	406.5	465	G[286]	-1150	406.5
386	G[207]	825	287.5	426	G[247]	-175	287.5	466	G[287]	-1175	287.5
387	G[208]	800	406.5	427	G[248]	-200	406.5	467	G[288]	-1200	406.5
388	G[209]	775	287.5	428	G[249]	-225	287.5	468	G[289]	-1225	287.5
389	G[210]	750	406.5	429	G[250]	-250	406.5	469	G[290]	-1250	406.5
390	G[211]	725	287.5	430	G[251]	-275	287.5	470	G[291]	-1275	287.5
391	G[212]	700	406.5	431	G[252]	-300	406.5	471	G[292]	-1300	406.5
392	G[213]	675	287.5	432	G[253]	-325	287.5	472	G[293]	-1325	287.5
393	G[214]	650	406.5	433	G[254]	-350	406.5	473	G[294]	-1350	406.5
394	G[215]	625	287.5	434	G[255]	-375	287.5	474	G[295]	-1375	287.5
395	G[216]	600	406.5	435	G[256]	-400	406.5	475	G[296]	-1400	406.5
396	G[217]	575	287.5	436	G[257]	-425	287.5	476	G[297]	-1425	287.5
397	G[218]	550	406.5	437	G[258]	-450	406.5	477	G[298]	-1450	406.5
398	G[219]	525	287.5	438	G[259]	-475	287.5	478	G[299]	-1475	287.5
399	G[220]	500	406.5	439	G[260]	-500	406.5	479	G[300]	-1500	406.5
400	G[221]	475	287.5	440	G[261]	-525	287.5	480	G[301]	-1525	287.5

No.	TextName	CX	CY
481	G[302]	-1550	406.5
482	G[303]	-1575	287.5
483	G[304]	-1600	406.5
484	G[305]	-1625	287.5
485	G[306]	-1650	406.5
486	G[307]	-1675	287.5
487	G[308]	-1700	406.5
488	G[309]	-1725	287.5
489	G[310]	-1750	406.5
490	G[311]	-1775	287.5
491	G[312]	-1800	406.5
492	G[313]	-1825	287.5
493	G[314]	-1850	406.5
494	G[315]	-1875	287.5
495	G[316]	-1900	406.5
496	G[317]	-1925	287.5
497	G[318]	-1950	406.5
498	G[319]	-1975	287.5
499	G[320]	-2000	406.5
500	G[321]	-2025	287.5
501	G[322]	-2050	406.5
502	G[323]	-2075	287.5
503	G[324]	-2100	406.5
504	G[325]	-2125	287.5
505	G[326]	-2150	406.5
506	G[327]	-2175	287.5
507	G[328]	-2200	406.5
508	G[329]	-2225	287.5
509	G[330]	-2250	406.5
510	G[331]	-2275	287.5
511	G[332]	-2300	406.5
512	G[333]	-2325	287.5
513	G[334]	-2350	406.5
514	G[335]	-2375	287.5
515	G[336]	-2400	406.5
516	G[337]	-2425	287.5
517	G[338]	-2450	406.5
518	G[339]	-2475	287.5
519	G[340]	-2500	406.5
520	G[341]	-2525	287.5

No.	TextName	CX	CY
521	G[342]	-2550	406.5
522	G[343]	-2575	287.5
523	G[344]	-2600	406.5
524	G[345]	-2625	287.5
525	G[346]	-2650	406.5
526	G[347]	-2675	287.5
527	G[348]	-2700	406.5
528	G[349]	-2725	287.5
529	G[350]	-2750	406.5
530	G[351]	-2775	287.5
531	G[352]	-2800	406.5
532	G[353]	-2825	287.5
533	G[354]	-2850	406.5
534	G[355]	-2875	287.5
535	G[356]	-2900	406.5
536	G[357]	-2925	287.5
537	G[358]	-2950	406.5
538	G[359]	-2975	287.5
539	G[360]	-3000	406.5
540	G[361]	-3025	287.5
541	G[362]	-3050	406.5
542	G[363]	-3075	287.5
543	G[364]	-3100	406.5
544	G[365]	-3125	287.5
545	G[366]	-3150	406.5
546	G[367]	-3175	287.5
547	G[368]	-3200	406.5
548	G[369]	-3225	287.5
549	G[370]	-3250	406.5
550	G[371]	-3275	287.5
551	G[372]	-3300	406.5
552	G[373]	-3325	287.5
553	G[374]	-3350	406.5
554	G[375]	-3375	287.5
555	G[376]	-3400	406.5
556	G[377]	-3425	287.5
557	G[378]	-3450	406.5
558	G[379]	-3475	287.5
559	G[380]	-3500	406.5
560	G[381]	-3525	287.5


No.	TextName	CX	CY
561	G[382]	-3550	406.5
562	G[383]	-3575	287.5
563	G[384]	-3600	406.5
564	G[385]	-3625	287.5
565	G[386]	-3650	406.5
566	G[387]	-3675	287.5
567	G[388]	-3700	406.5
568	G[389]	-3725	287.5
569	G[390]	-3750	406.5
570	G[391]	-3775	287.5
571	G[392]	-3800	406.5
572	G[393]	-3825	287.5
573	G[394]	-3850	406.5
574	G[395]	-3875	287.5
575	G[396]	-3900	406.5
576	G[397]	-3925	287.5
577	G[398]	-3950	406.5
578	G[399]	-3975	287.5
579	G[400]	-4000	406.5
580	G[401]	-4025	287.5
581	G[402]	-4050	406.5
582	G[403]	-4075	287.5
583	G[404]	-4100	406.5
584	G[405]	-4125	287.5
585	G[406]	-4150	406.5
586	G[407]	-4175	287.5
587	G[408]	-4200	406.5
588	G[409]	-4225	287.5
589	G[410]	-4250	406.5
590	G[411]	-4275	287.5
591	G[412]	-4300	406.5
592	G[413]	-4325	287.5
593	G[414]	-4350	406.5
594	G[415]	-4375	287.5
595	G[416]	-4400	406.5
596	G[417]	-4425	287.5
597	G[418]	-4450	406.5
598	G[419]	-4475	287.5
599	G[420]	-4500	406.5
600	G[421]	-4525	287.5

No.	TextName	CX	CY
601	G[422]	-4550	406.5
602	G[423]	-4575	287.5
603	G[424]	-4600	406.5
604	G[425]	-4625	287.5
605	G[426]	-4650	406.5
606	G[427]	-4675	287.5
607	G[428]	-4700	406.5
608	G[429]	-4725	287.5
609	G[430]	-4750	406.5
610	G[431]	-4775	287.5
611	G[432]	-4800	406.5
612	G[433]	-4825	287.5
613	G[434]	-4850	406.5
614	G[435]	-4875	287.5
615	G[436]	-4900	406.5
616	G[437]	-4925	287.5
617	G[438]	-4950	406.5
618	G[439]	-4975	287.5
619	G[440]	-5000	406.5
620	G[441]	-5025	287.5
621	G[442]	-5050	406.5
622	G[443]	-5075	287.5
623	G[444]	-5100	406.5
624	G[445]	-5125	287.5
625	G[446]	-5150	406.5
626	G[447]	-5175	287.5
627	G[448]	-5200	406.5
628	G[449]	-5225	287.5
629	G[450]	-5250	406.5
630	G[451]	-5275	287.5
631	G[452]	-5300	406.5
632	G[453]	-5325	287.5
633	G[454]	-5350	406.5
634	G[455]	-5375	287.5
635	G[456]	-5400	406.5
636	G[457]	-5425	287.5
637	G[458]	-5450	406.5
638	G[459]	-5475	287.5
639	G[460]	-5500	406.5
640	G[461]	-5525	287.5

No.	TextName	CX	CY
641	G[462]	-5550	406.5
642	G[463]	-5575	287.5
643	G[464]	-5600	406.5
644	G[465]	-5625	287.5
645	G[466]	-5650	406.5
646	G[467]	-5675	287.5
647	G[468]	-5700	406.5
648	G[469]	-5725	287.5
649	G[470]	-5750	406.5
650	G[471]	-5775	287.5
651	G[472]	-5800	406.5
652	G[473]	-5825	287.5
653	G[474]	-5850	406.5
654	G[475]	-5875	287.5
655	G[476]	-5900	406.5
656	G[477]	-5925	287.5
657	G[478]	-5950	406.5
658	G[479]	-5975	287.5
659	G[480]	-6000	406.5
660	G[481]	-6025	287.5
661	DUMMY[73]	-6050	406.5

Application Notes

1. MODE = "H", channel number =480 (MODE pin connect to VCC)

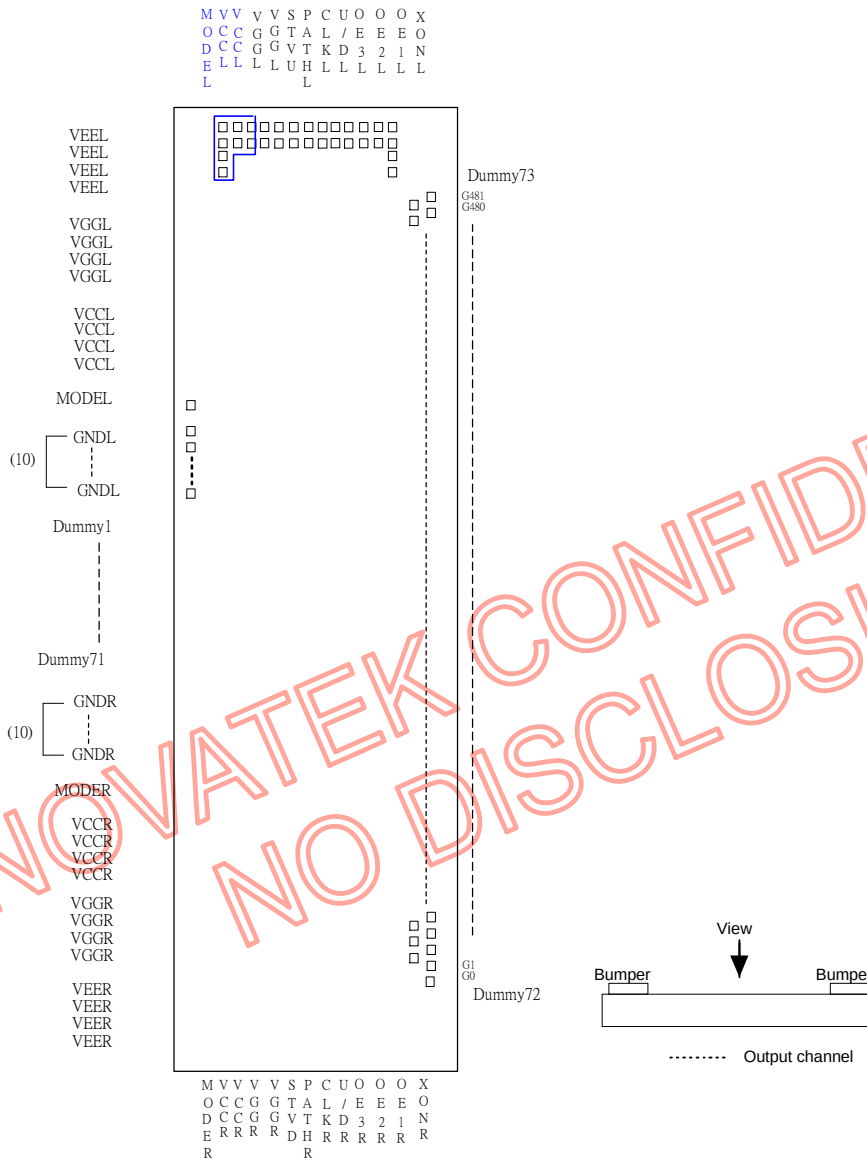

2. MODE = "L", channel number =320 (MODE pin connect to GND)

