




OA109AP Dual Voltage




AC Fans - 115, 230V
120mm x 38mm (4.7" x 1.5")

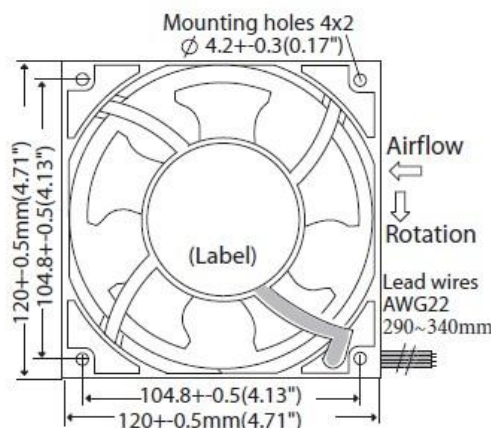

Frame	Die Cast Aluminum, Black Finish	<u>Operating Temperature</u> -20°C ~ +70°C <u>Storage Temperature</u> -40°C ~ +100°C <u>Life Expectancy</u> 80,000 Hours (L10 at 45°C) Weight: 1.2 lbs.	Static Pressure ("H₂O) Airflow (CFM) *60 Hz PQ Airflow Data specifications shown
Impeller	PBT, UL94 V-0 Plastic		
Connection	4x Lead Wires, UL 1430 22 AWG		
Motor	Shaded Pole, Single Phase, Impedance Protected		
Bearing System	Dual Ball Bearings		
Dielectric Strength	1500VAC/min, <1mA		
Insulation Resistance	≥10M Ohm @ 500 VAC		

Part Number	Rated Voltage (Volts AC)	Frequency (Hertz)	Voltage Range (Volts AC)	Input Power (Watts)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H ₂ O)
OA109AP-11/22-1WB	115 / 230	50 / 60	100-120 200-240	17 / 15	2600 / 3000	90 / 105	42	0.29 / 0.31
OA109AP-11/22-2WB	115 / 230	50 / 60	100-120 200-240	13 / 11	2400 / 2350	77 / 71	35	0.21 / 0.18
OA109AP-11/22-3WB	115 / 230	50 / 60	100-120 200-240	10 / 8	2000 / 1400	66 / 53	27	0.17 / 0.13

Dual Voltage Wiring Diagram 115VAC

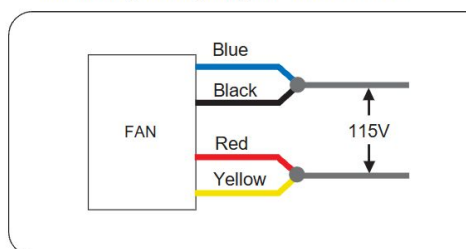

Dual Voltage Wiring Diagram 230VAC

