

Safety relay

OA / OW 5669

- according to EN 50 205, IEC/EN 60 255, IEC 60 664-1
- with positively driven contacts
- wash proof model as option
- **double and reinforced insulatio**n between **contact sets according to EN 50 178**
- low rated power consumption
- high mechanical service life
- compact size, small height
- Approvals: UL, CSA,
TÜV approval: R 9012316

Applications:

ZH1/457 press controls
Switchgear for safety technology



OA / OW 5669

Technical data

Relay type		OA 5669
1. 0 Relay coil		
1. 1 Nominal voltage	DC V	5, 6, 12, 20, 24, 48, 60, 110
1. 2 Nominal consumption	W	0,7
2. 0 Contacts		
2. 1 Contact arrangement		1 NC / 1 NO 2 changeover contacts, 1 No and 1 changeover contact
2. 2 Contact material		AgCdO + 0,2 µm Au; AgNi 10 + 0,2 µm Au optionally + 5 µm Au
2. 3 Rated insulation voltage	AC V	250
Switching voltage min./max.	V	AC/DC 10 / DC 250, AC 400 (AC/DC 100 mV / 60 V) ¹⁾
2. 4 Limiting continuous current	A	2 x 5 (see operating voltage limit curve)
Switching current min./max.	A	10mA ³⁾ / 8 (1 mA / 0,3 A) ¹⁾
2. 5 Switching power min./max.	VA	3 / 2 000 (1 mVA / 7 VA) ¹⁾
Switching power min./max.	W	3 / 200 (1 mW / 7 W) ¹⁾ (s. limit curve for arc-free operation)
2. 6 Switching capacity to IEC/EN 60 947-5-1 AC 15 DC 13	AC V/A DC V/A	NC: 230 / 1 NO: 230 / 3 NC: 24 / 2 NO: 24 / 2
2. 7 Electrical life ²⁾ AC 230 V 6 A cos φ = 1	switching cycles	at 1 s On, 1 s Off > 1 x 10 ⁵ AgNi 10 > 2 x 10 ⁵ AgCdO (s. contacts service life)
2. 8 Switching frequency max.	switching cycles / s	10
2. 9 Response time / Release time	ms	≤ 15 / ≤ 12
2.10 Contact force NO / NC	cN	≥ 10 / ≥ 8
3. 0 Other		
3. 1 Mechanical life	switching cycles	≥ 50 x 10 ⁶
3. 2 Temperature range	°C	- 40 ... + 60 mounted without distance (I _{th} = 2 x 5 A)
3. 3 Degree of protection, housing		IP40 / IP67 IEC/EN 60 529 wash proof
3. 4 Housing		Thermoplast GF, PA
3. 5 Vibration resistance		10 ... 55 Hz; 0,35 mm amplitude; 5 g max. IEC/EN 60 068-2-6
3. 6 Climate resistance		40 / 060 / 04 (climate category); A/B/D IEC/EN 60 068-1
3. 8 Insulation according to IEC 60 664-1, EN 50 178		double and reinforced insulation
Rated insulation voltage	AC V	250
Contamination level		2
Overvoltage category		III

¹⁾ Values for AgNi 10-contacts + 5 µm Au

²⁾ 10 A total current at t = 20°C and coil voltage UN


³⁾ Typical values

3. 8 Test voltage	contact-coil (1 min)	AC kV eff.	≥ 4
	contact-contact (1 min)	AC kV eff.	≥ 4
Transient volt.	contact-coil (1,2 - 50 μs)	kV	≥ 6
Clearance and creepage distances as per IEC/EN 60 730, IEC/EN 60 335			
3. 9 Weight	contact-coil	mm	≥ 8
	contact-contact:	mm	≥ 5,5
		g	15


Standard variants

U _N DC V	Voltage range DC V	Resistance at 20°C Ω	Design version OA / OW		
			.16	.16	.12
5	4,0...8,0	36	461	991	980
6	4,8...9,6	50	462	992	981
12	9,6...19,2	210	463	993	982
20	16,0...32,0	580	468	998	987
24	19,2...38,4	820	464	994	983
48	38,4...76,8	3 200	465	995	984
60	48,0...96,0	5 200	466	996	985
110	88,0...176	18 000	467	997	986


Ordering example

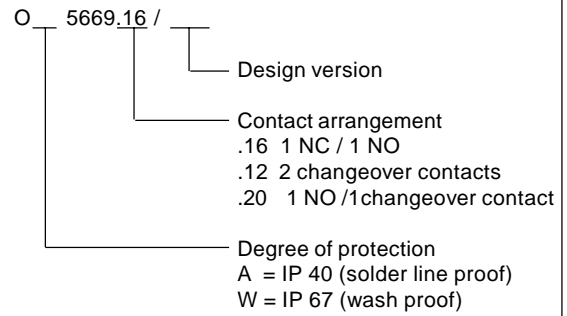


Characteristics

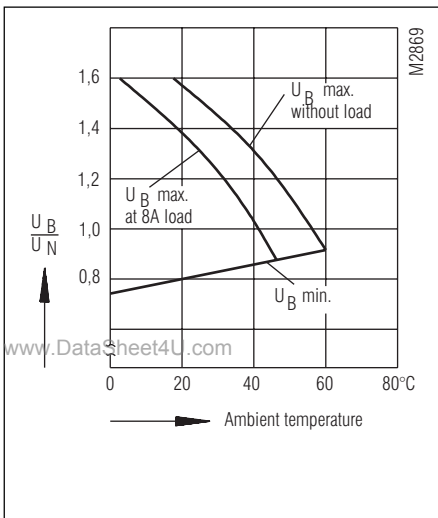

Operating voltage limit curve

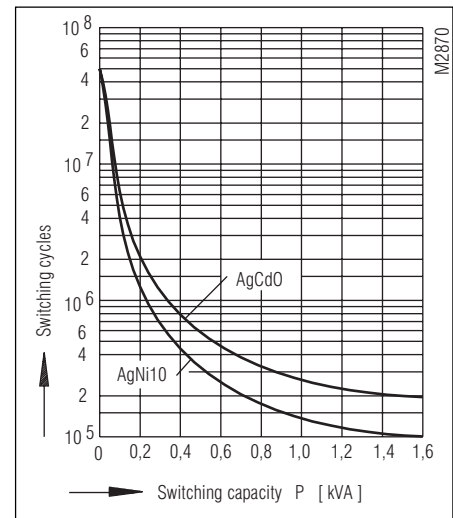


Contact service life (at $t_u = 20^\circ\text{C}$)

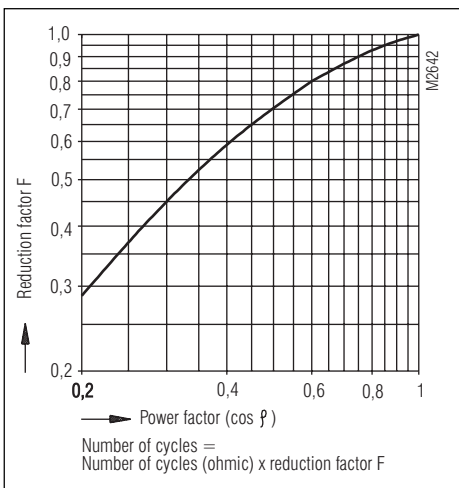


Reduction factor for inductive loads


Contact material
AgNi

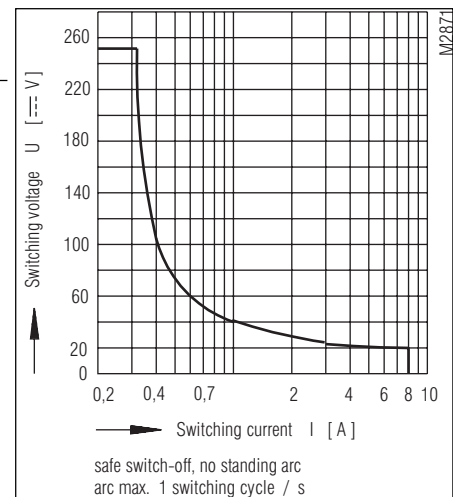

Limit curve for arc-free operation
(at $t_u = 20^\circ\text{C}$)

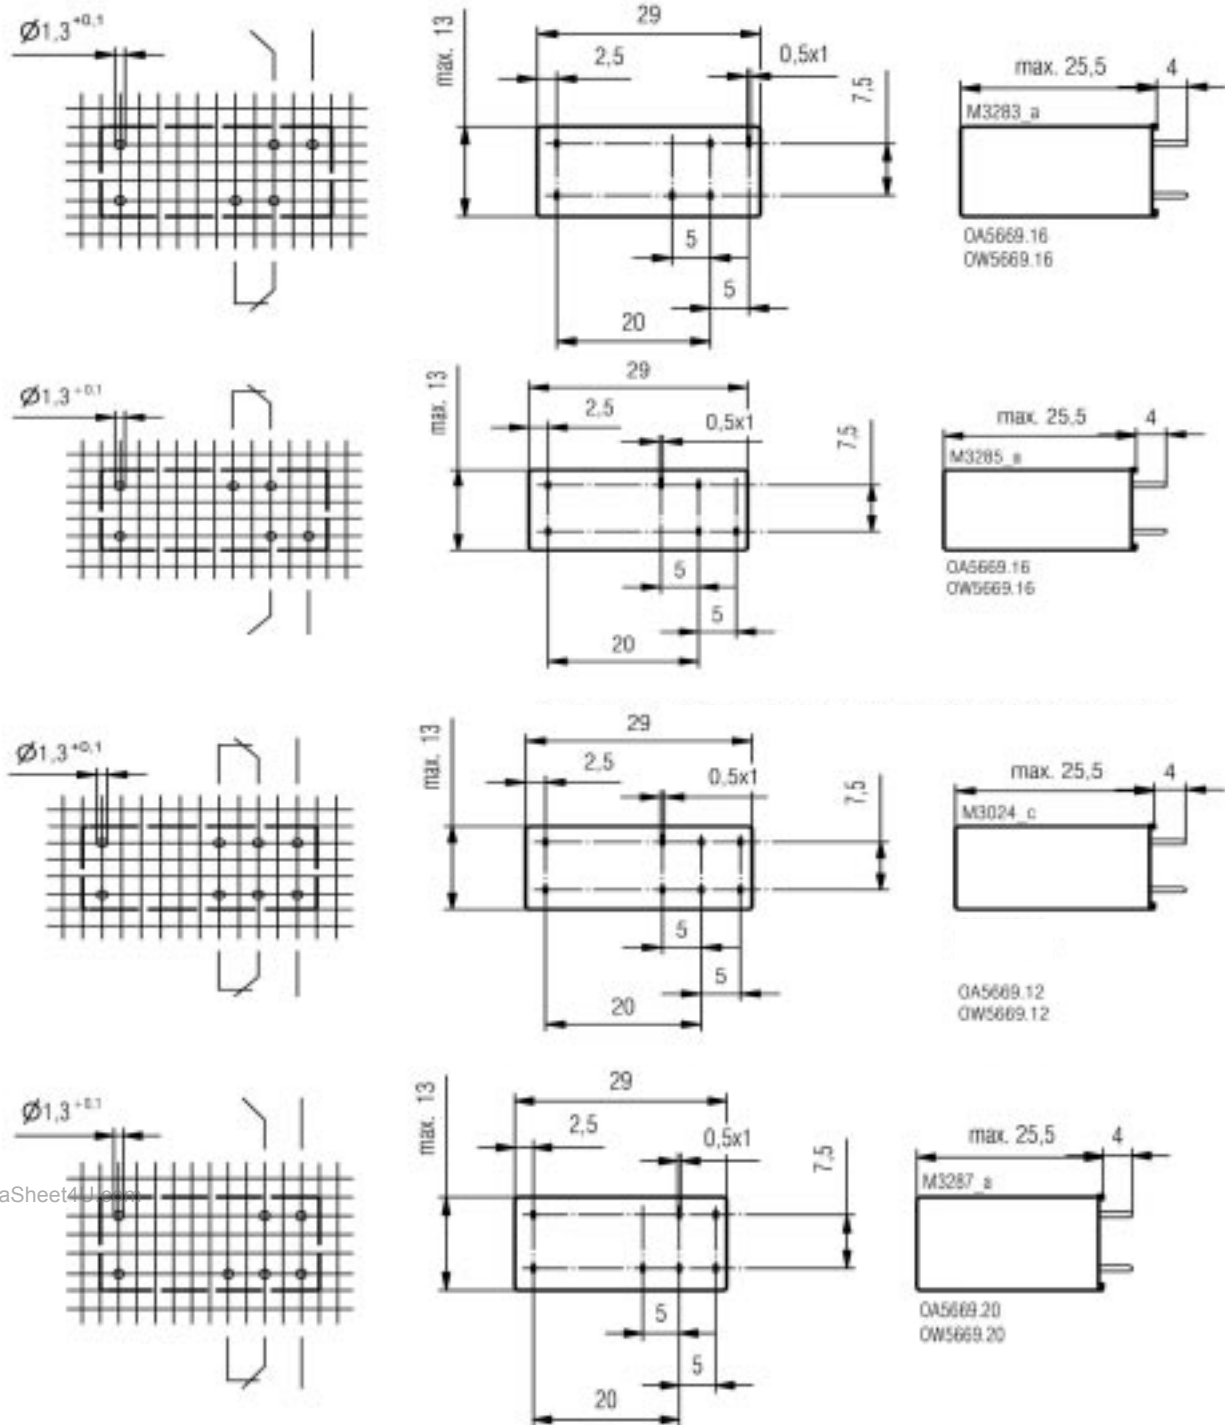


Connection for basic grid dimensions 2,5 mm as well as 2,54 mm according to IEC/EN 60 097 and IEC 60 326 average

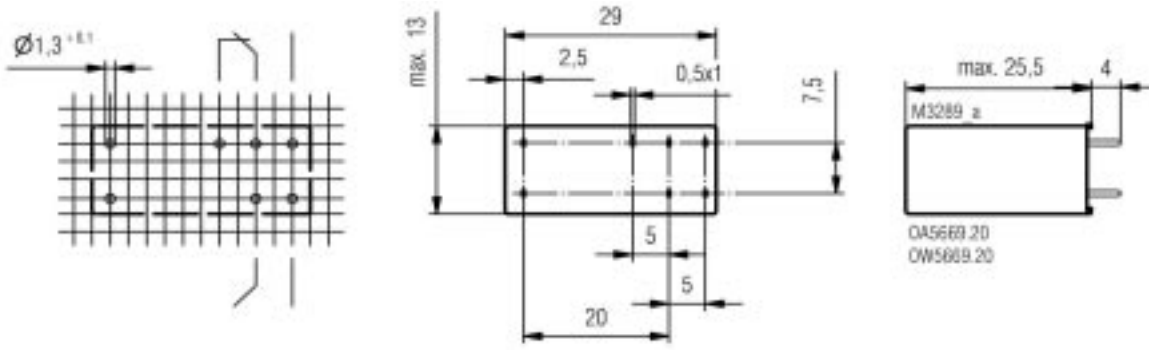

Connection for basic grid dimensions 2,5 mm as well as 2,54 mm according to IEC/EN 60 097 and IEC 60 326 average

Accessories

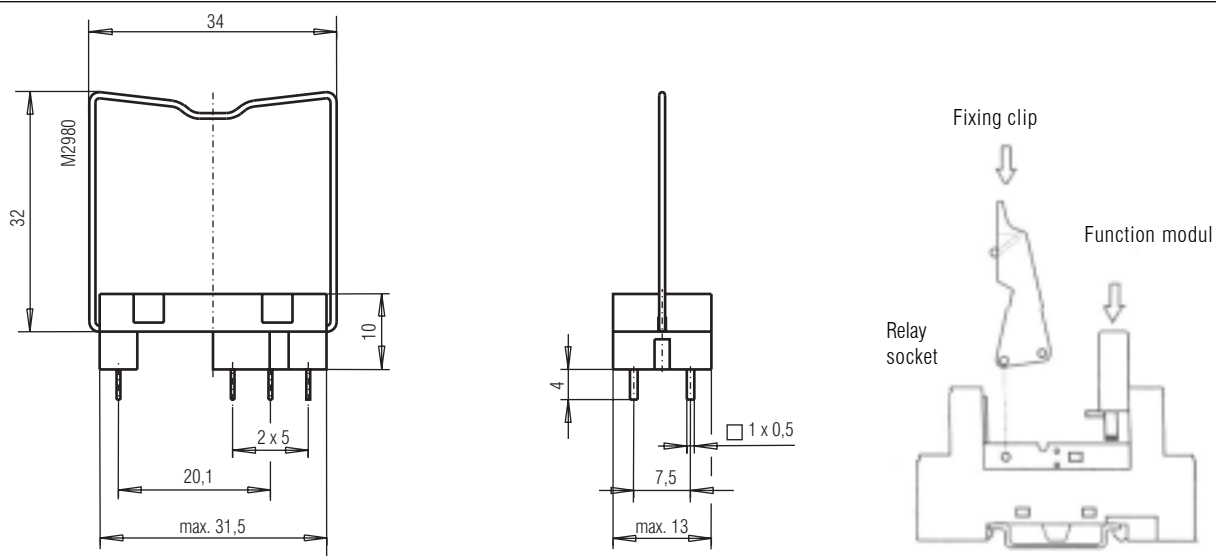

- Socket ET 1415.021 ANR 0034 769
- Fixing clip ET 1415.025 ANR 0034 770 Wire
- Fixing clip ET 1415.026 ANR 0047 726 Plastic

Relay socket ET 1415.041 ANR 0055571 with fixing clip WN 1415.902.790

Function modul ET 1415.911 ANR 0055909 - DC, with free-wheeling diode and red LED

Function modul ET 1415.912 ANR 0055910 - AC/DC with green LED

