


# OA60 Series



AC Fan - 115V, 230V  
60 x 30mm (2.36" x 1.18")

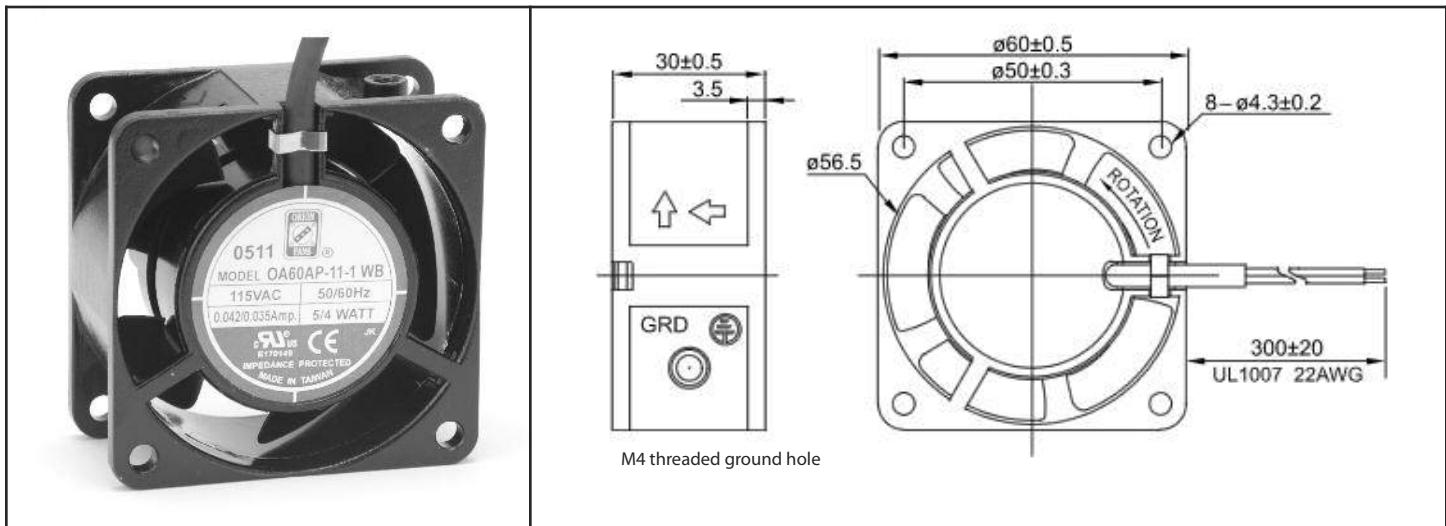

Frame	Diecast Aluminum	<u>Operating Temperature</u> Ball Bearing $-20C \sim +80C$ Storage Temp $-40C \sim +80C$  <u>Life Expectancy</u> Ball Bearing 60,000 hours (L10 at 40C)  Weight: $\sim 0.31$ lbs  $m^2$	<p>The graph plots Static Pressure (in <math>^{\prime\prime}\text{H}_2\text{O}</math>) on the y-axis (0.00 to 0.12) against Air Flow (in CFM) on the x-axis (0 to 12). The curve shows a non-linear relationship, starting at approximately (0, 0.11) and decreasing to about (12, 0.01).</p>
Impeller	PBT, UL94V-0 plastic		
Connection	2x Lead Wires 22 AWG		
Motor	Shaded pole, impedance protected		
Bearing System	Dual ball		
Insulation Resistance	>100M ohm between lead-wire and frame (500VDC)		
Dielectric Strength	1 min at 1,500 VAC, 50/60Hz		

Part Number	OA60AP-11-1WB	OA60AP-22-1WB
Nominal Voltage	115VAC	230VAC
Voltage Range	80 ~ 130VAC	160 ~ 260VAC
Rated Power	4 W	4 W
Rated Speed (RPM)	3,100	3,100
Airflow (CFM)	11	11
Noise Level (dB)	28	28
Max. Static Pressure	0.11" $\text{H}_2\text{O}$	0.11" $\text{H}_2\text{O}$