

OCXO-50

FEATURES

- ☐ High reliability for low cost
- ☐ Aging of ± 0.001 ppm/day in compact package using SC-Cut crystals
- ☐ Extended temperature range to $-40/+75^{\circ}\text{C}$ available
- ☐ Short warm-up time and excellent retrace behaviour
- ☐ Low power consumption and excellent phase noise parameters
- ☐ AT-cut and SC-cut based designs

Pb-free
RoHS-2 2011/65/EU
compliant

GENERAL DATA

SERIES		OCXO-50
PACKAGE		50.8 x 50.8 x 24 mm ³
FREQUENCY RANGE		10.0 ~ 50.0 MHz
FREQUENCY ACCURACY		± 0.2 ppm (control voltage centered)
FREQUENCY STABILITY	VS. AGING AT-CUT	± 0.002 ppm/day / ± 0.2 ppm/first year / ± 2 ppm/10 years
	VS. AGING SC-CUT	± 0.001 ppm/day / ± 0.1 ppm/first year / ± 0.35 ppm/10 years
	VS. LOAD	± 0.002 ppm / load change of ± 10 %
	VS. SUPPLY VOLTAGE	± 0.002 ppm / supply voltage changement of ± 5 %
	VS. TEMPERATURE	See table 1
SHORT TERM STABILITY		1x10E-11/s (10 MHz SC)
OPERATING TEMPERATURE RANGE		0/+50°C ~ -40/+75°C
STORAGE TEMPERATURE RANGE		-40/+100°C
SUPPLY VOLTAGE		+5.0VDC $\pm 5\%$ / +12VDC $\pm 5\%$
CURRENT CONSUMPTION		5.0W max. during warm-up / 2.0W max. when static
WARM-UP TIME	AT-CUT	± 0.2 ppm <5 minutes
	SC-CUT	± 0.1 ppm <5 minutes
FREQUENCY CONTROL RANGE	AT-CUT	± 3.0 ppm
	SC-CUT	± 0.7 ppm
CONTROL VOLTAGE		0 ~ 5 VDC
SLOPE		POSITIVE
LINEARITY		$\pm 10\%$
PHASE NOISE	10 Hz	-120 dBc/Hz
	100 Hz	-140 dBc/Hz
	1 kHz	-145 dBc/Hz
	10 kHz	-150 dBc/Hz
OUTPUT SIGNAL AND LOAD CHARACTERISTICS		See table 2
OTHER PARAMETERS ARE AVAILABLE ON REQUEST / CREATE HERE YOUR SPECIFICATION		

CRYSTALS

OSCILLATORS

CERAMIC RESONATORS



Premium Quality by
PETERMANN-TECHNIK

CERAMIC FILTERS

SAW COMPONENTS

Spec.01 • REV.00 • August 2013



TABLE 1- FREQUENCY STABILITY VS. TEMPERATURE

CODE	FREQUENCY STABILITY VS. TEMPERATURE	TEMPERATURE RANGE
A	±30 ppb for AT-CUT	0/+50°C
B	±10 ppb for SC-CUT	0/+50°C
C	±100 ppb for AT-CUT	-20/+70°C
D	±30 ppb for SC-CUT	-20/+70°C
E	±500 ppb for AT-CUT	-40/+75°C
F	±100 ppb for SC-CUT	-40/+75°C

TABLE 2 - OUTPUT WAVEFORM AND LOAD CHARACTERISTICS

OUTPUT WAVEFORM	OUTPUT TYPE CODE	FREQUENCY RANGE	OSCILLATION STATE	OUTPUT CHARACTERISTICS
SINE WAVE	S	10.0 ~ 50.0 MHz		Load: 50 Ω Output level: >2dBm Harmonic : < -25dBm Noise Suppression: <- 75dBm
HCMOS	H	10.0 ~ 50.0 MHz		Load: 15PF TYP/50 PF Max. available "1" level: > 0.9VDD; "0" level: <0.1VDD Duty cycle: 45/55 Rise/fall time: <6ns(fn<40MHz) <3ns(fn>40 MHz)
LVC MOS	L	10.0 ~ 50.0 MHz		Load: 15PF TYP/50 PF Max. available "1" level: > 0.9VDD; "0" level: <0.1VDD Duty cycle: 45/55 Rise/fall time: <6ns(fn<40MHz) <3ns(fn>40 MHz)

OUTLINE DRAWING OF OCXO-50

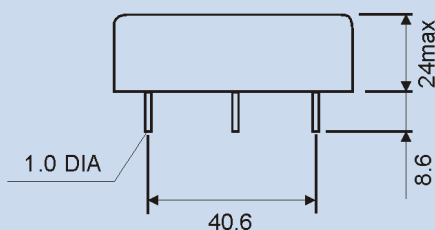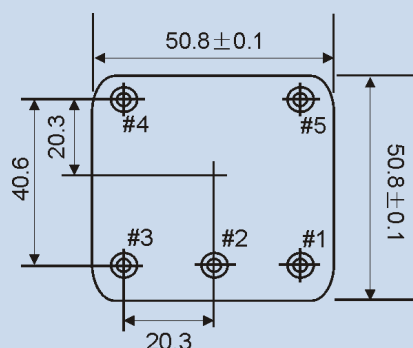

PIN	Connection
#1	Voltage Control
#2	Reference Voltage/NC
#3	Output
#4	Ground
#5	Power Supply

Unit:mm
Note: Lead-Kovar
Finish - Ni Plated


CRYSTALS
OSCILLATORS
CERAMIC RESONATORS


Premium Quality by
PETERMANN-TECHNIK

CERAMIC FILTERS
SAW COMPONENTS

Spec.01 • REV.00 • August 2013

TEST CURCUIT

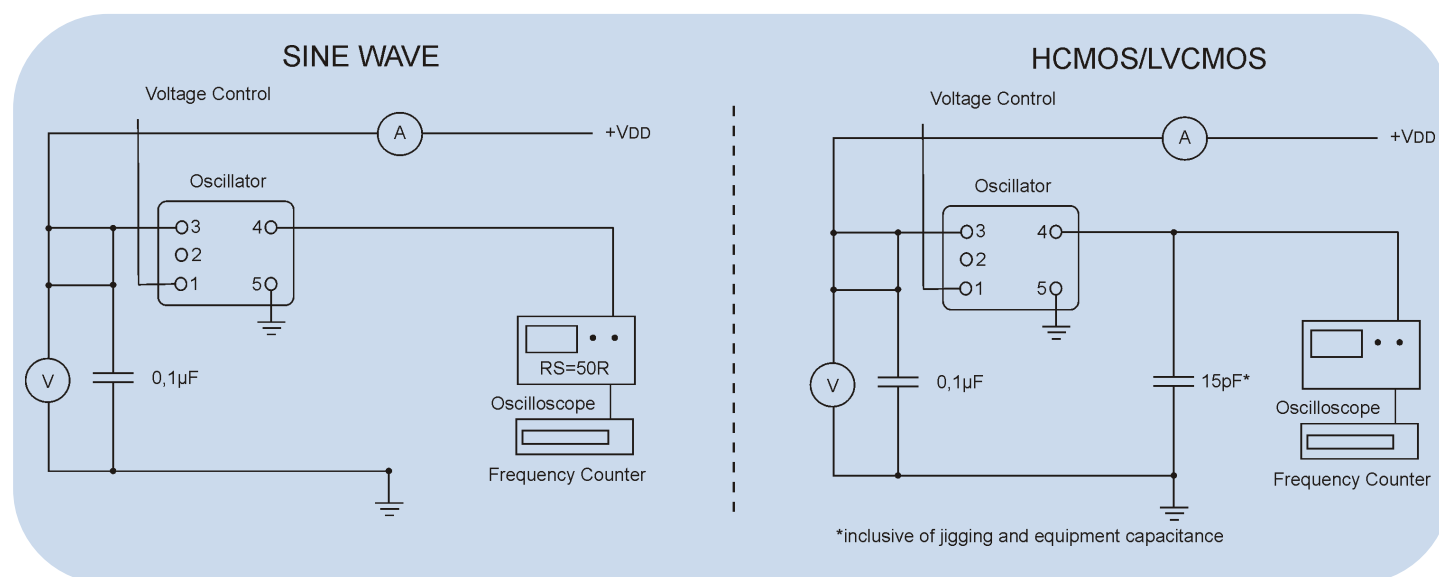

ORDERING INFORMATION

OC50-5-A-10.000MHz-S

TYPE _____
 OC14 / OC20 / OC25 / OC36 / OC50

VDD _____
 3 for 3.3 Volt / 5 for 5 Volt / 12 for 12 Volt

FREQUENCY STABILITY _____
 See Table 1

OUTPUT WAVEFORM
 S-SINE WAVE / H-HCMOS /
 L-LVCMOS

FREQUENCY
 See Table 2

PLEASE INDICATE YOUR REQUIRED PARAMETERS

CRYSTALS
OSCILLATORS
CERAMIC RESONATORS



CERAMIC FILTERS
SAW COMPONENTS
 Spec.01 • REV.00 • August 2013