



Charlottesville, VA USA
www.isotemp.com

OCXO 131-1000

PHONE: (434) 295-3101
FAX: (434) 977-1849

CRYSTAL OSCILLATOR SPECIFICATION

This specification defines the operating characteristics of an ovenized crystal oscillator. Long term stability is assured through use of premium components.

REV	DESCRIPTION OF REVISION	BY	APV	DATE
-		BTG	TST	03-04-2006

ISOTEMP RESEARCH INC. CHARLOTTESVILLE, VA. USA	CODE ID	MODEL NO.	PAGE OF TOTAL		DWG. NO.	REV.
	31785	OCXO 131-1000	1	3	114-1244	-



Charlottesville, VA USA
www.isotemp.com

OCXO 131-1000

- 1. OUTPUT (PIN = "R.F. OUTPUT")
 - 1.1. Frequency 10.000 MHz
 - 1.2. Waveform Sine wave
 - 1.3. Level +8 ±2 dBm
 - 1.4. Load 50 Ω ±5%
 - 1.5. Harmonics < -30 dBc
 - 1.6. Spurious < -60 dBc

- 2. FREQUENCY STABILITY
 - 2.1. Ambient < ±1x10⁻⁸, 0°C to +70°C
(referenced to +25°C)

 - 2.2. Aging
 - a. At time of shipment < ±5x10⁻¹⁰/day
 - b. After indefinite storage
 - i. Daily < ±5x10⁻¹⁰ after 30 days
 - ii. Yearly < ±1x10⁻⁷
 - iii. 10 years < ±3x10⁻⁷
 - 2.3. Voltage < ±1x10⁻⁸/±5% change
 - 2.4. Load < ±5x10⁻⁹/±5% change
 - 2.5. Warm-up < ±2x10⁻⁸ in 5 minutes @ +25°C
(referenced to 4 hour)

 - 2.6. Phase noise
 - a. @ 1 Hz < -90 dBc
 - b. @ 10 Hz < -120 dBc
 - c. @ 100 Hz < -140 dBc
 - d. @ 1 kHz < -148 dBc
 - e. @ 10 kHz < -150 dBc

- 3. ELECTRICAL FREQUENCY ADJUSTMENT (PIN = "VCO INPUT")
 - 3.1. Range > ±4x10⁻⁷
< ±9x10⁻⁷ (At time of shipment)
(Referenced to nominal frequency)

 - 3.2. Control 0 to +5 V
 - 3.3. Slope Positive
 - 3.4. Center +2.5 ±0.5 V
(Control voltage at which nominal frequency occurs at time of shipment)

 - 3.5. Input impedance > 100 kΩ

- 4. INPUT POWER (PIN = "+VDC")
 - 4.1. Voltage +12 V ±5%
 - 4.2. Current < 350 mA @ turn on
 - 4.3. Steady state < 1.5 Watts @ +25°C

ISOTEMP RESEARCH INC. CHARLOTTESVILLE, VA. USA	CODE ID	MODEL NO.	PAGE OF TOTAL		DWG. NO.	REV.
	31785	OCXO 131-1000	2	3	114-1244	-




Charlottesville, VA USA
www.isotemp.com



OCXO 131-1000

- 5. REFERENCE VOLTAGE (PIN = "REFERENCE VOLTAGE"), an output
 - 5.1. Voltage +8 V $\pm 5\%$
 - 5.2. Load > 9 k Ω
 - 5.3. Temperature stability < ± 0.0015 V
(Over temperature range in 2.1.)
- 6. MECHANICAL
 - 6.1. Applicable series OCXO 131 series
 - 6.2. Model number OCXO 131-1000
 - 6.3. Outline drawing 125-587

ISOTEMP RESEARCH INC. CHARLOTTESVILLE, VA. USA	CODE ID	MODEL NO.	PAGE OF TOTAL		DWG. NO.	REV.
	31785	OCXO 131-1000	3	3	114-1244	-

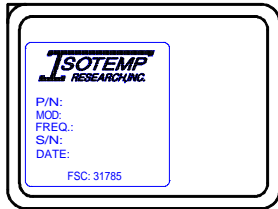

(VIEW FROM TOP)

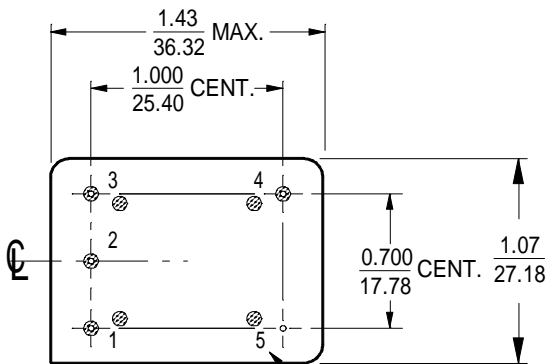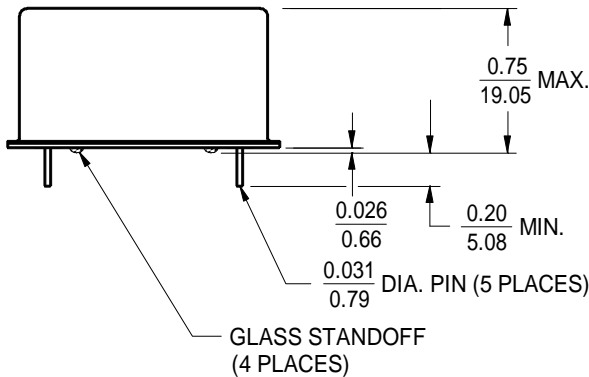

(VIEW FROM BOTTOM) NUMBERS FOR REFERENCE ONLY (NOT STAMPED ON UNIT)

PIN CONNECTIONS	
PIN	FUNCTION
1 (See Note 1)	VCO INPUT or NOT CONNECTED
2 (See Note 1)	REFERENCE VOLTAGE or NOT CONNECTED
3	+VDC
4	R. F. OUTPUT
5	0 VOLTS & CASE

Note 1. If the specification does not specify parameters for either PIN1 or PIN2 then that respective PIN is NOT internally CONNECTED.

INCH
mm (REFERENCE ONLY)

FORM NO. 120-081D



OSCILLATORS

CHARLOTTESVILLE, VIRGINIA

NAME: OUTLINE DRAWING
(TCXO 141 & OCXO 131 SERIES)

CODE I.D. NO.
31785

SCALE: 1:1
DWN. BY: LRB

DATE: 12-04-00
APPR'D. BY: DAG

LET	REVISION	BY	APP	DATE
A	1.07 WAS 1.07 MAX.	DAG	TST	12-6-01

TOLERANCES
UNLESS OTHERWISE SPECIFIED:
ANGLES: ±1 DEGREE
FRACTIONS: ±1/32 INCH
DECIMALS: .XX ±.015, .XXX ±.010 INCHES
MAT'L: STEEL
FINISH: NICKEL
MARK: LABEL

DWG: 125-587
REV: A
SHT: 1 OF 1