




STANDARD GRAPHIC MODULES

OLG192192AY01

192x192 DOTS
1/192 DUTY, 1/12 BIAS

1 EXTERNAL DIMENSION AND DISPLAY PATTERN

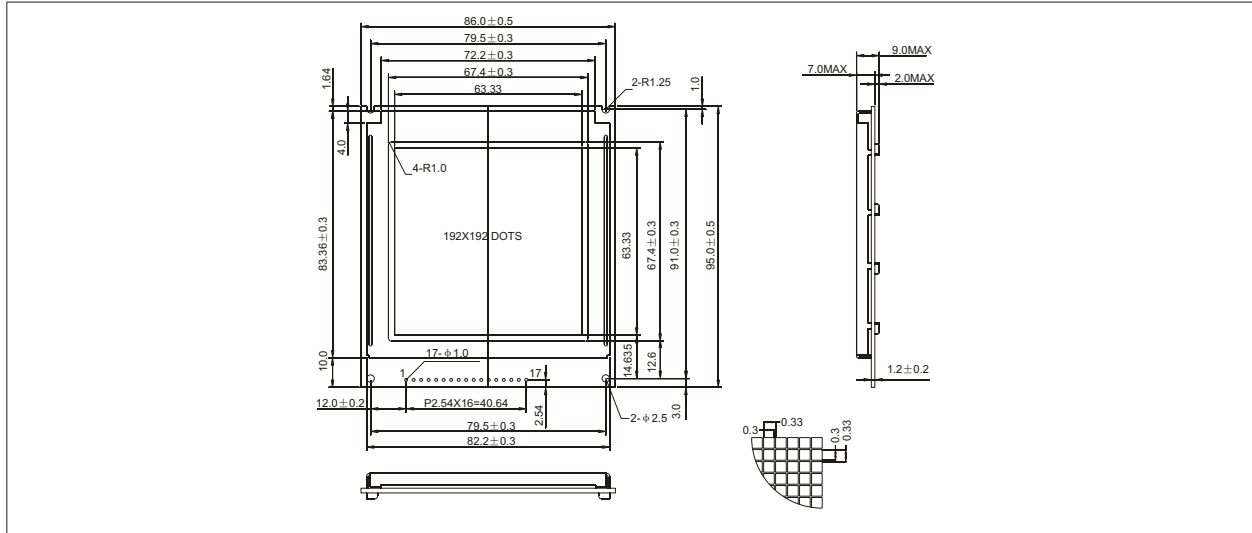

2 MECHANICAL DATA

ITEM	SPECIFICATION	UNIT
Module Size(W*H*T)	86.0×95.0×9.0	mm
Viewing Area(W*H)	67.4×67.4	mm
Number of Dots	192×192	mm
Dot Pitch (W*H)	0.33×0.33	mm
Dot Size (W*H)	0.3×0.3	mm

3 PIN CONFIGURATION

PIN No.	SYMBOL	FUNCTION
1	V _{DD}	Logic Supply Voltage(+5.0v)
2	FGND	Frame Ground
3	CL2	Data Shift Clock
4	INH	Display ON/OFF Control Terminal
5	FLM	Frame Signal
6	CL1	Data Latch Signal
7	V _{SS}	Ground
8	M	LCD Drive Signal (AC Signal)
9-12	D0- D3	Data Bus Line
13	V _{LC}	Operating Voltage for LCD
14	V _O	LCD Drive Output Voltage Level
15	V _{SS}	Ground
16	LEDA	Power Supply Terminal for Driving LED Backlight
17	LEDC	GND Terminal for Driving LED Backlight

4 ABSOLUTE MAXIMUM RATINGS


PARAMETER	SYMBOL	MIN	MAX	UNIT
Supply Voltage Logic	V _{DD} -V _{SS}	-0.3	7.0	V
Supply Voltage Driver	V _{DD} -V _{EE}	0	30.0	V
Intut Voltage	V _{IN}	-0.3	V _{DD} +0.3	V

Operating Temp	See page 9
Storage Temp	

5 ELECTRICAL CHARACTERISTICS(Ta=25 °C)

ITEM	SYMBOL	CONDITION	SPEC. VALUE			UNIT
			MIN.	TYP.	MAX.	
Supply Voltage (Logic)	V _{DD} -V _{SS}		2.7	5.0	5.5	V
Supply Current (Logic)	I _{DD}	V _{DD} =5V	-	0.8	-	mA
Input Voltage	HIGH	V _H	0.8V _{DD}	-	V _{DD}	V
	LOW	V _L	-	-	0.2V _{DD}	V
Output Voltage	HIGH	V _{OH}	V _{DD} -0.4	-	-	V
	LOW	V _{OL}	-	-	0.4	V
LCD Operating Voltage	V _{DD} -V _{EE}	V _{DD} =5V Ta=25 °C	6	24.0	28	v
Supply Voltage LCD Drive	I _{EE}		-	0.5	-	mA

6 BLOCK DIAGRAM

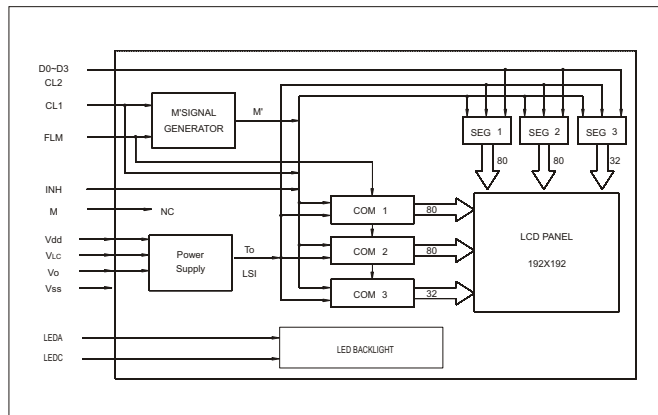

7 BACKLIGHTING CHARACTERISTICS(Ta=25 °C)

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIX
Supply Voltage	V _F	IF=150mA	3.9	4.1	4.3	V
Power Consumption	P _{LED}			615		mW
Luminous						cd/m ²




STANDARD GRAPHIC MODULES


YMC192192-01AAAGDSL

192x192DOTS
1/192DUTY, 1/12BIAS

8 SEGMENT DRIVER APPLICATION TIMING

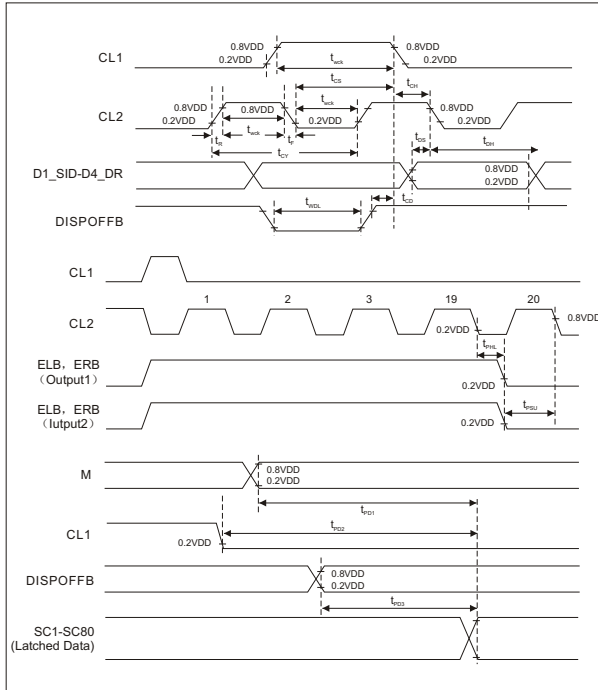

9 COMMON DRIVER APPLICATION TIMING

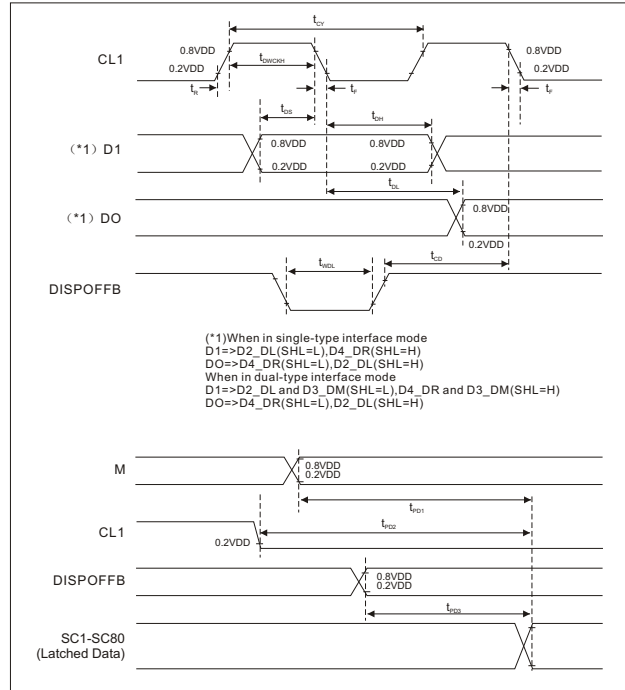

10 AC CHARACTERISTICS

(1) Segment Driver Application

(V_{SS}=0V, T_a=-30~+85°C)

Characteristic	Symbol	Test Condition	(1)V _{DD} =5V±10%			(2)V _{DD} =3V±10%			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Clock cycle time	t _{CY}	Duty=50%	125	-	-	250	-	-	ns
Clock pulse width	t _{WCK}	-	45	-	-	95	-	-	
Clock rise/fall time	t _R , t _F	-	-	-	-	-	-	30	
Data set-up time	t _{DS}	-	30	-	-	65	-	-	
Data hold time	t _{DH}	-	30	-	-	65	-	-	
Clock set-up time	t _{CS}	-	80	-	-	120	-	-	
Clock hold time	t _{CH}	-	80	-	-	120	-	-	
Propagation delay time	t _{PHL}	ELB Output	-	-	60	-	-	125	
		ERB Output	-	-	60	-	-	125	
ELB ERB set-up time	t _{PSU}	ELB Input	30	-	-	65	-	-	
		ERB Input	30	-	-	65	-	-	
DISPOFFB low pulse width	t _{WDL}	-	1.2	-	-	1.2	-	-	μs
DISPOFFB clear time	t _{CD}	-	100	-	-	100	-	-	ns
M-OUT propagation delay time	t _{PD1}	C _L =15pF	-	-	1.0	-	-	1.2	μs
CLI-OUT propagation delay time	t _{PD2}		-	-	1.0	-	-	1.2	
DISPOFFB-OUT propagation delay time	t _{PD3}		-	-	1.0	-	-	-	

(2) Common Driver Application

(V_{SS}=0V, T_a=-30~+85°C)

Characteristic	Symbol	Test Condition	(1)V _{DD} =5V±10%			(2)V _{DD} =3V±10%			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Clock cycle time	t _{CY}	Duty=50%	250	-	-	500	-	-	ns
Clock pulse width	t _{WCK}	-	45	-	-	95	-	-	
Clock rise/fall time	t _R , t _F	-	-	-	50	-	-	50	
Data set-up time	t _{DS}	-	30	-	-	65	-	-	
Data hold time	t _{DH}	-	30	-	-	65	-	-	
DISPOFFB low pulse width	t _{WDL}	-	1.2	-	-	1.2	-	-	μs
DISPOFFB clear time	t _{CD}	-	100	-	-	100	-	-	ns
Output delay time	t _{DL}	C _L =15pF	-	-	200	-	-	250	
M-OUT propagation delay time	t _{PD1}		-	-	1.0	-	-	1.2	μs
CLI-OUT propagation delay time	t _{PD2}		-	-	1.0	-	-	1.2	
DISPOFFB-OUT propagation delay time	t _{PD3}		-	-	1.0	-	-	1.2	