

# 1.5 AMP POSITIVE ADJUSTABLE VOLTAGE REGULATOR APPROVED TO DESC DRAWING 7703401



## Three Terminal, Precision Adjustable Positive Voltage Regulator In Hermetic Style Packages (LM117)

### FEATURES

- Similar To Industry Standard LM117
- Approved To DESC Standardized Military Drawing Number 7703401
- Built In Thermal Overload Protection
- Short Circuit Current Limiting
- Available In Six Package Styles

### DESCRIPTION

These three terminal positive regulators are supplied in hermetically sealed packages. All protective features are designed into the circuit, including thermal shutdown, current-limiting, and safe-area control. With heat sinking, these devices can deliver up to 1.5 amps of output current. The LCC-20 device is limited to .5 amps. The unit also features output voltages that can be fixed from 1.2 volts to 37 volts using external resistors.

### ABSOLUTE MAXIMUM RATINGS $T_c @ 25^\circ\text{C}$

Power Dissipation

Case 2 . . . . . 1.1 W

Case-All Others. . . . . 20 W

Input - Output Voltage Differential . . . . . 40 V

Operating Junction Temperature Range . . . . . - 55°C to + 150°C

Storage Temperature Range . . . . . - 65°C to + 150°C

Lead Temperature (Soldering 10 seconds) . . . . . 300°C

Thermal Resistance, Junction to Case:

Case 2, LCC-20 . . . . . 17°C/W

Case U & M, TO-257 (Isol) and SMD-3 . . . . . 4.2°C/W

Case T&N, TO-257 (Non-Isol) and SMD-1 . . . . . 3.5°C/W

Case Y, TO-3. . . . . 3.0°C/W

Maximum Output Current:

Case 2 . . . . . .5 A

Case-All Others. . . . . 1.5 A

Recommended Operating Conditions:

Output Voltage Range . . . . . 1.2 to 37 VDC

Ambient Operating Temperature Range ( $T_A$ ). . . . . - 55°C to + 125°C

Input Voltage Range . . . . . 4.25 to 41.25 VDC

3.5

**ELECTRICAL CHARACTERISTICS** -55°C T<sub>A</sub> 125°C, I<sub>L</sub> = 8mA (unless otherwise specified)

**OM1320NTM, OM1320STM, OM1320NKM, OM1320SMM, OM1320NMM**

| Parameter                        | Symbol            | Test Conditions   | Min.   | Max.              | Unit |
|----------------------------------|-------------------|---|--------|-------------------|------|
| Reference Voltage                | V <sub>REF</sub>  | V <sub>DIFF</sub> = 3.0V, T <sub>A</sub> = 25°C   | 1.20   | 1.30              | V    |
|                                  |                   | V <sub>DIFF</sub> = 3.3V  | • 1.20 | 1.30              |      |
|                                  |                   | V <sub>DIFF</sub> = 40V   | • 1.20 | 1.30              |      |
| Line Regulation<br>(Note 1)      | R <sub>LINE</sub> | 3.0V V <sub>DIFF</sub> 40V, V <sub>out</sub> = V <sub>ref</sub> , T <sub>A</sub> = 25°C                       | -9     | 9                 | mV   |
|                                  |                   | 3.3V V <sub>DIFF</sub> 40V, V <sub>out</sub> = V <sub>ref</sub>   | • -23  | 23                |      |
| Load Regulation<br>(Note 1)      | R <sub>LOAD</sub> | V <sub>DIFF</sub> = 3.0V, 10mA I <sub>L</sub> 1.5A, T <sub>A</sub> = 25°C                                     | -15    | 15                | mV   |
|                                  |                   | V <sub>DIFF</sub> = 3.3V, 10mA I <sub>L</sub> 1.5A  | • -15  | 15                |      |
|                                  |                   | V <sub>DIFF</sub> = 40V, 10mA I <sub>L</sub> 300mA, T <sub>A</sub> = 25°C                                     | -15    | 15                |      |
|                                  |                   | V <sub>DIFF</sub> = 40V, 10mA I <sub>L</sub> 195mA  | • -15  | 15                |      |
| Thermal Regulation               | V <sub>RTH</sub>  | V <sub>in</sub> = 14.6V, I <sub>L</sub> = 1.5A<br>P <sub>d</sub> = 20 Watts, t = 20 ms, T <sub>A</sub> = 25°C | -16    | 16                | mV   |
| Ripple Rejection<br>(Note 2)     | R <sub>N</sub>    | f = 120 Hz, V <sub>out</sub> = V <sub>ref</sub><br>C <sub>Adj</sub> = 10 µF                                   | • 66   |                   | dB   |
| Adjustment Pin Current           | I <sub>Adj</sub>  | V <sub>DIFF</sub> = 3.0V, T <sub>A</sub> = 25°C<br>V <sub>DIFF</sub> = 3.3V<br>V <sub>DIFF</sub> = 40V        |        | 100<br>100<br>100 | µA   |
| Adjustment Pin<br>Current Change | I <sub>Adj</sub>  | V <sub>DIFF</sub> = 3.0V, 10mA I <sub>L</sub> 1.5A, T <sub>A</sub> = 25°C                                     | -5     | 5                 | µA   |
|                                  |                   | V <sub>DIFF</sub> = 3.3V, 10mA I <sub>L</sub> 1.5A  | • -5   | 5                 |      |
|                                  |                   | V <sub>DIFF</sub> = 40V, 10mA I <sub>L</sub> 300mA, T <sub>A</sub> = 25°C                                     | • -5   | 5                 |      |
|                                  |                   | V <sub>DIFF</sub> = 40V, 10mA I <sub>L</sub> 195mA  | • -5   | 5                 |      |
|                                  |                   | 3.0V V <sub>DIFF</sub> 40V, T <sub>A</sub> = 25°C   | -5     | 5                 |      |
|                                  |                   | 3.3V V <sub>DIFF</sub> 40V  | • -5   | 5                 |      |
| Minimum Load Current             | I <sub>Lmin</sub> | V <sub>DIFF</sub> = 3.0V, V <sub>OUT</sub> = 1.4V (forced)  |        | 5.0               | mA   |
|                                  |                   | V <sub>DIFF</sub> = 3.3V, V <sub>OUT</sub> = 1.4V (forced)  | •      | 5.0               |      |
|                                  |                   | V <sub>DIFF</sub> = 40V, V <sub>OUT</sub> = 1.4V (forced)   | •      | 5.0               |      |
| Current Limit<br>(Note 2)        | I <sub>CL</sub>   | V <sub>DIFF</sub> = 15V   | • 1.5  | 3.5               | A    |
|                                  |                   | V <sub>DIFF</sub> = 40V, T <sub>A</sub> = 25°C  | 0.18   | 1.5               |      |

**Notes:**

1. Load and Line Regulation are specified at a constant junction temperature. Pulse testing with low duty cycle is used. Changes in output voltage due to heating effects must be taken into account separately.
2. If not tested, shall be guaranteed to the specified limits.
3. The • denotes the specifications which apply over the full operating temperature range.

3.5

| PART NUMBER DESIGNATOR   |   |  |
|--|---|--|
| Standard Military Drawing Number                                     | Omnirel Part Number   | Omnirel Package Designation  |
| 7703401M<br>7703401U<br>7703401T<br>7703401Y<br>7703401N<br>77034012 | OM1320SMM<br>OM1320STM<br>OM1320NTM<br>OM1320 NKM<br>OM1320NMM<br>OM1320N2M | SMD-3<br>TO-257 (Isolated)<br>TO-257 (non-Isolated)<br>TO-3<br>SMD-1<br>LCC-20 |



**ELECTRICAL CHARACTERISTICS** -55°C T<sub>A</sub> 125°C, I<sub>L</sub> = 8mA (unless otherwise specified)

**OM1320N2M**

| Parameter                     | Symbol            | Test Conditions   | Min.                                     | Max.                       | Unit |
|-------------------------------|-------------------|---|--|----------------------------|------|
| Reference Voltage             | V <sub>REF</sub>  | V <sub>DIFF</sub> = 3.0V, T <sub>A</sub> = 25°C<br>V <sub>DIFF</sub> = 3.3V<br>V <sub>DIFF</sub> = 40V  | 1.20<br>• 1.20<br>• 1.20                 | 1.30<br>1.30<br>1.30       | V    |
| Line Regulation<br>(Note 1)   | R <sub>LINE</sub> | 3.0V V <sub>DIFF</sub> 40V, V <sub>out</sub> = V <sub>ref</sub> , T <sub>A</sub> = 25°C<br>3.3V V <sub>DIFF</sub> 40V, V <sub>out</sub> = V <sub>ref</sub>  | -9<br>• -23                              | 9<br>23                    | mV   |
| Load Regulation<br>(Note 1)   | R <sub>LOAD</sub> | V <sub>DIFF</sub> = 3.0V, 10mA I <sub>L</sub> .5A, T <sub>A</sub> = 25°C<br>V <sub>DIFF</sub> = 3.3V, 10mA I <sub>L</sub> .5A<br>V <sub>DIFF</sub> = 40V, 10mA I <sub>L</sub> 150mA, T <sub>A</sub> = 25°C<br>V <sub>DIFF</sub> = 40V, 10mA I <sub>L</sub> 100mA  | -15<br>• -15<br>-15<br>• -15             | 15<br>15<br>15<br>15       | mV   |
| Thermal Regulation            | V <sub>RTH</sub>  | V <sub>in</sub> = 14.6V, I <sub>L</sub> = 300mA<br>P <sub>d</sub> = 4 Watts, t = 20 ms, T <sub>A</sub> = 25°C   | -16                                      | 16                         | mV   |
| Ripple Rejection<br>(Note 2)  | R <sub>N</sub>    | f = 120 Hz, V <sub>out</sub> = V <sub>ref</sub><br>C <sub>Adj</sub> = 10 μF   | • 66                                     |                            | dB   |
| Adjustment Pin Current        | I <sub>Adj</sub>  | V <sub>DIFF</sub> = 3.0V, T <sub>A</sub> = 25°C<br>V <sub>DIFF</sub> = 3.3V<br>V <sub>DIFF</sub> = 40V  |  | 100<br>100<br>100          | μA   |
| Adjustment Pin Current Change | I <sub>Adj</sub>  | V <sub>DIFF</sub> = 3.0V, 10mA I <sub>L</sub> .5A, T <sub>A</sub> = 25°C<br>V <sub>DIFF</sub> = 3.3V, 10mA I <sub>L</sub> .5A<br>V <sub>DIFF</sub> = 40V, 10mA I <sub>L</sub> 150mA, T <sub>A</sub> = 25°C<br>V <sub>DIFF</sub> = 40V, 10mA I <sub>L</sub> 100mA<br>3.0V V <sub>DIFF</sub> 40V, T <sub>A</sub> = 25°C<br>3.3V V <sub>DIFF</sub> 40V | -5<br>• -5<br>• -5<br>• -5<br>-5<br>• -5 | 5<br>5<br>5<br>5<br>5<br>5 | μA   |
| Minimum Load Current          | I <sub>Lmin</sub> | V <sub>DIFF</sub> = 3.0V, V <sub>OUT</sub> = 1.4V (forced)<br>V <sub>DIFF</sub> = 3.3V, V <sub>OUT</sub> = 1.4V (forced)<br>V <sub>DIFF</sub> = 40V, V <sub>OUT</sub> = 1.4V (forced)   |  | 5.0<br>5.0<br>5.0          | mA   |
| Current Limit<br>(Note 2)     | I <sub>CL</sub>   | V <sub>DIFF</sub> = 15V<br>V <sub>DIFF</sub> = 40V, T <sub>A</sub> = 25°C   | • .5<br>0.15                             | 1.65<br>.065               | A    |

**Notes:**

1. Load and Line Regulation are specified at a constant junction temperature. Pulse testing with low duty cycle is used. Changes in output voltage due to heating effects must be taken into account separately.
2. If not tested, shall be guaranteed to the specified limits.
3. The • denotes the specifications which apply over the full operating temperature range.


**STANDARD APPLICATION**

\* C<sub>in</sub> is required if regulator is located an appreciable distance from power supply filter.

\*\* C<sub>o</sub> is not needed for stability, however it does improve transient response.

$$V_{out} = 1.25 V \left( 1 + \frac{R_2}{R_1} \right) + I_{Adj} R_2$$

Since I<sub>Adj</sub> is controlled to less than 100 μA, the error associated with this term is negligible in most applications.

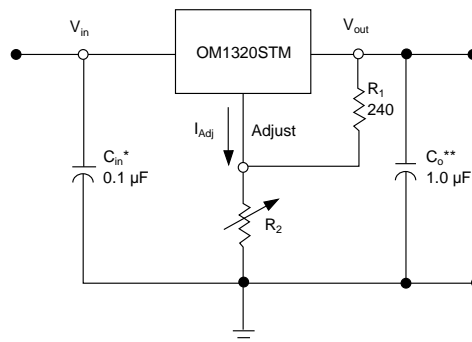

3.5



