

Compact Non-Contact Infrared Temperature Transmitter

With USB PC Configurable Non-Contact Temperature Sensor with 4 to 20 mA Output



OS151-USB, \$593, shown smaller than actual size.

OS151-USB Series
Starts at
\$593



Optional†

- ✔ **Configurable Settings From a PC via Software and USB Cable (Included)**
- ✔ **Features Max, Min Average and Instantaneous Readings; Peak or Valley Hold; Reflected Energy Compensation**
- ✔ **OPC Server Capabilities**
- ✔ **Temperature Range -40 to 1000°C (-40 to 1832°F)**
- ✔ **Emissivity: 0.1 to 1.0**
- ✔ **Response Time 240 mS to 90%**
- ✔ **Stainless Steel Housing, Sealed to IP65**
- ✔ **Field of View: 15:1, 30:1 or Close Focus**
- ✔ **4 to 20 mA Output**
- ✔ **Quick and Easy Installation**
- ✔ **Optional Air/Water Cooled Housing, Air Purge Collar, Laser Sighting Tool and Mounting Brackets**

The OS151-USB Series measures temperatures from -40 to 1000°C (-40 to 1832°F) accurately and consistently, with an outstanding response time of 240 mS. The 4 to 20 mA output is compatible with almost any indicator, controller, recorder, data logger etc. without the need for special interfacing or signal conditioning.

OS151-USB has 15:1 optics making it suitable for most applications. OS301-USB is specially designed for distant targets and has an optical resolution of 30:1. OS801-USB is designed for small targets and measures a spot size of 5 mm (0.20") diameter at 100 mm (3.9") distance. All these sensors are fully configurable from a PC using the software and USB cable supplied. This user friendly software enables the user to set the range and emissivity, compensate for reflected energy; apply filtering; select max, min, average or instantaneous readings; and peak or valley hold processing. These features can also be monitored and adjusted by an OPC (open process control) client. Other features include data acquisition, alarms and a scrolling graphical display. The sensor will operate with the 4 to 20 mA cable connected, the USB cable connected, or both. The USB cable has an IP65 connector at the sensor end. An IP65 cap protects the sensor when the USB cable is not connected.

† Refer to page J-3 for NIST calibration ordering information.



Compact stainless steel IP65 housing.



OS151-USB, \$593.

Specifications

Temperature Range: -40 to 1000°C (-40 to 1832°F)

Field-of-View:

OS151-USB: 15:1

OS301-USB: 30:1

OS801-USB: 5 at 100 mm dia

Output: 4 to 20 mA (linear with temperature)

Configuration: Via PC port conforming to USB 2.0

Accuracy: ±1% of reading or ±1°C whichever is greater

Repeatability: ±0.5% of reading or ±0.5°C whichever is greater

Emissivity: 0.1 to 1.0

Response Time t90: 240 mS (90% response)

Spectral Range: 8 to 14 μm

Supply Voltage: 24 Vdc (28 Vdc max)

Sensor Voltage: 6 Vdc min

Maximum Loop Impedance: 900 Ω

Maximum Span: 1000°C (1832°F)

Minimum Span: 100°C (212°F)

Mechanical

Construction: Stainless steel

Dimensions: 106.5 L x 25 mm D (4.19 x 0.98")

Thread Mounting: M20 x 1 mm (0.04") pitch

Weight with Output Cable: 175 g (6.2 oz)

Output Cable Length: 1 m (3.3')


USB Cable Length: 1 m (3.3')

Environmental

Environmental Rating: IP65

Ambient Temperature Range: 0 to 70°C (32 to 158°F)

Relative Humidity: 95% max non-condensing

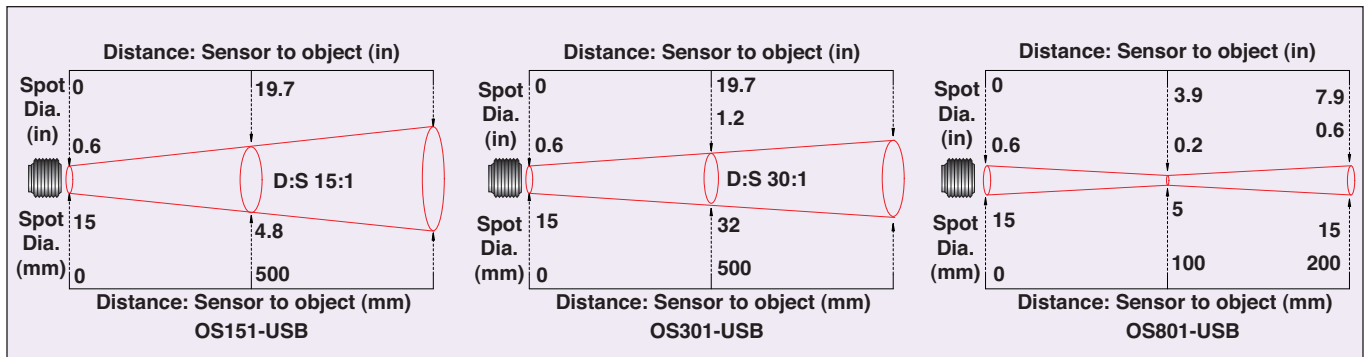


All models shown smaller than actual size.




Fixed Mounting Bracket

The L-shaped fixed mounting bracket offers a rigid support for the sensor and allows fine adjustment in a single plane. **OSUSB-FBL, \$15.**




Adjustable Mounting Bracket

The adjustable mounting bracket consists of a fixed mounting bracket plus another L-shaped bracket. When assembled as shown the adjustable mounting bracket offers a rigid support for the sensor and allows fine adjustment in two planes. **OSUSB-ABL, \$36.**




Air Purge Collar

The air purge collar is used to keep dust, fumes, moisture and other contaminants away from the lens. Air flows into the fitting on the side and out of the aperture at the front. **OSUSB-APL, \$75.**

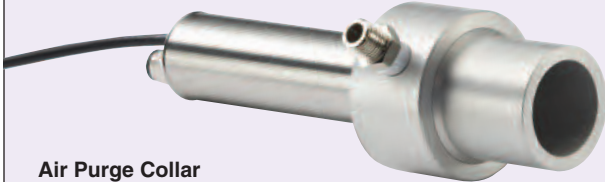

Laser Sighting Tool

The laser sighting tool screws onto the front of the sensor during installation and indicates precisely where the sensor is aiming. Once the sensor has been aimed at the centre of the target and locked in position the laser sighting tool can be removed. The laser is activated by means of a push button on the front of the tool which has a latching mechanism. **OSUSB-LSTL, \$306.**

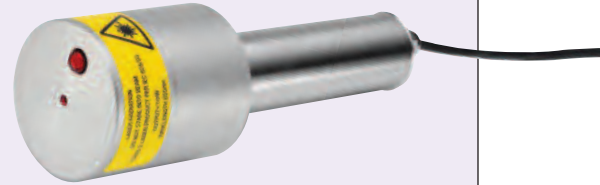

MOST POPULAR MODELS HIGHLIGHTED!

To Order (Specify Model Number)

Model No.	Price	Description	Optics	Output
OS151-USB	\$593	Configurable infrared temperature sensor	15:1	4 to 20 mA
OS301-USB	678	Configurable infrared temperature sensor	30:1	4 to 20 mA
OS801-USB	763	Configurable infrared temperature sensor (5 mm dia measurement spot at 100 mm distance)	Close-focus	4 to 20 mA

Comes complete with sensor head, 1 m (3.3') cable, USB cable, software, and operator's manual.

Ordering Examples: **OS301-USB-WC**, configurable infrared temperature sensor with 30:1 optics, 4 to 20 mA output, USB cable PC software, and water cooled jacket, 678 + 374 = **\$1052.**

OS151-USB-CE(3), configurable infrared temperature sensor with 15:1 optics, 4 to 20 mA output, USB cable and PC software with additional 3 m (9.8') of cable extension, \$593 + 4 (3) = **\$605.** **OCW-3**, OMEGACARESM extends standard 2-year warranty to a total 5 years (**\$148**), \$605 + 148 = **\$753.**

Options (Not Field Installable)

Suffix	Price/Meter	Description
-WC	\$374	For air/water cooled jacket (includes air purge collar)
-CE(*)	4	Cable extended, for uncooled PC sensor, standard 4 to 20 mA output, 30 m (98') max total cable length
-CEHT(*)	13	Cable extended, high temperature, for cooled PC standard 4 to 20 mA output, 30 m (98') max total cable length

* 1 m (3.3') cable is included as standard on every sensor. Extended cable is added to that length, add suffix to model number.

Accessories

Model No.	Price	Description
OSUSB-FBL	\$15	Fixed bracket for IR USB
OSUSB-ABL	36	Adjustable bracket for IR USB
OSUSB-APL	75	Air purge collar for IR USB
OSUSB-LSTL	306	Laser sighting tool for IR USB
CAL-3-IR†	125	NIST-traceable calibration



OMEGACARESM extended warranty program is available for models shown on this page. Ask your sales representative for full details when placing an order. OMEGACARESM covers parts, labor and equivalent loaners.

Power Supplies

Model No.	Price	Description
PSR-24S	\$60	Regulated power supply, US plug, 90 to 264 Vac input, 24 Vdc output, 400 mA, screw terminals, UL
PSR-24L	60	Regulated power supply, US plug, 90 to 264 Vac input, 24 Vdc output, 400 mA, stripped leads, UL
PSR-24L-230	60	Regulated power supply, European plug, 230 Vac input, 24 Vdc output, 400 mA, stripped leads, CE
TX8-100	95	Power/output cable, 30 m (98')



UNITED STATES

www.omega.com
1-800-TC-OMEGA
Stamford, CT.

CANADA

www.omega.ca
Laval(Quebec)
1-800-TC-OMEGA

GERMANY

www.omega.de
Deckenpfronn, Germany
0800-8266342

UNITED KINGDOM

www.omega.co.uk
Manchester, England
0800-488-488

FRANCE

www.omega.fr
Guyancourt, France
088-466-342

CZECH REPUBLIC

www.omegaeng.cz
Karviná, Czech Republic
596-311-899

BENELUX

www.omega.nl
Amstelveen, NL
0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters