



**datasheet**

PRELIMINARY SPECIFICATION

1/3.06" color CMOS 13.2 megapixel (4224 x 3136) image sensor  
with OmniBSI-3™ technology

OV13850

**Copyright ©2013 OmniVision Technologies, Inc. All rights reserved.**

This document is provided “as is” with no warranties whatsoever, including any warranty of merchantability, non-infringement, fitness for any particular purpose, or any warranty otherwise arising out of any proposal, specification, or sample.

OmniVision Technologies, Inc. and all its affiliates disclaim all liability, including liability for infringement of any proprietary rights, relating to the use of information in this document. No license, expressed or implied, by estoppel or otherwise, to any intellectual property rights is granted herein.

The information contained in this document is considered proprietary to OmniVision Technologies, Inc. and all its affiliates. This information may be distributed to individuals or organizations authorized by OmniVision Technologies, Inc. to receive said information. Individuals and/or organizations are not allowed to re-distribute said information.

**Trademark Information**

OmniVision and the OmniVision logo are registered trademarks of OmniVision Technologies, Inc. OmniBSI-3 is a trademark of OmniVision Technologies, Inc.

All other trademarks used herein are the property of their respective owners.

**color CMOS 13.2 megapixel (4224 x 3136) image sensor with OmniBSI-3™ technology**

datasheet (COB)

PRELIMINARY SPECIFICATION

version 1.2

october 2013

To learn more about OmniVision Technologies, visit [www.ovt.com](http://www.ovt.com).

OmniVision Technologies is publicly traded on NASDAQ under the symbol OVTI.

## applications

- cellular phones
- PC multimedia
- tablets

## ordering information

- **OV13850-G04A** (color, chip probing, 200  $\mu\text{m}$  backgrinding, reconstructed wafer with good die)

## features

- 1.12  $\mu\text{m}$  x 1.12  $\mu\text{m}$  pixel with OmniBSI-3™ technology
- optical size of 1/3.06"
- 31.2° CRA for <6mm z-height
- programmable controls for frame rate, mirror and flip, cropping, and windowing
- support for image sizes: 13.2MP (4224x3136), 10MP (16:9 - 4224x2376), 4K2K (3840x2160), EIS 1080p (2112x1188), EIS 720p (1408x792), and more
- 13.2MP at 30 fps
- two-wire serial bus control (SCCB)
- strobe output to control flash
- 8kbits of embedded one-time programmable (OTP) memory (see **sidebar note**)
- two on-chip phase lock loops (PLLs)
- programmable controls: gain, exposure, frame rate, image size, horizontal mirror, vertical flip, cropping, and panning
- image quality controls: defect pixel correction, automatic black level calibration, lens shading correction, and alternate row HDR
- built-in temperature sensor
- suitable for module size of 8.5 mm x 8.5 mm x <6mm



**note** 3.3kbits are reserved for customer.



**note** pixel performance shown are target values. These values are subject to change based on real measurements.

## key specifications (typical)

- **active array size:** 4224x3136
- **power supply:**
  - analog: 2.6 ~ 3.0V (2.8V nominal)
  - core: 1.14 ~ 1.26V (1.2V nominal)
  - I/O: 1.7 ~ 3.0V (1.8V or 2.8V nominal)
- **power requirements:**
  - active: 223mW
  - standby: 300 $\mu\text{W}$
  - XSHUTDOWN: 1 $\mu\text{W}$
- **temperature range:**
  - operating: -30°C to 85°C junction temperature
  - stable image: 0°C to 60°C junction temperature
- **output interfaces:** up to 4-lane MIPI serial output
- **output formats:** 10-bit RGB RAW
- **lens size:** 1/3.06"
- **input clock frequency:** 6 ~ 64 MHz
- **lens chief ray angle:** 31.2°
- **sensitivity:** TBD
- **max S/N ratio:** TBD
- **dynamic range:** TBD
- **pixel size:** 1.12  $\mu\text{m}$  x 1.12  $\mu\text{m}$
- **dark current:** TBD
- **image area:** 4815  $\mu\text{m}$  x 3678.3  $\mu\text{m}$
- **die dimensions:** 6210  $\mu\text{m}$  x 5517  $\mu\text{m}$  (COB), 6260  $\mu\text{m}$  x 5567  $\mu\text{m}$  (RW) (see **section 8** for details)



**note** COB refers to whole wafers with known good die and RW refers to singulated good die on a reconstructed wafer. Die size differs between COB and RW.

**OV13850**

color CMOS 13.2 megapixel (4224 x 3136) image sensor with OmniBSI-3™ technology

Confidential for  
CMK

## table of contents

|                                                 |            |
|-------------------------------------------------|------------|
| <b>1 signal descriptions</b>                    | <b>1-1</b> |
| <b>2 system level description</b>               | <b>2-1</b> |
| 2.1 overview                                    | 2-1        |
| 2.2 architecture                                | 2-1        |
| 2.3 format and frame                            | 2-2        |
| 2.4 I/O control                                 | 2-3        |
| 2.5 MIPI interface                              | 2-5        |
| 2.6 power management                            | 2-6        |
| 2.6.1 power up sequence                         | 2-6        |
| 2.6.2 power down sequence                       | 2-9        |
| 2.7 reset                                       | 2-13       |
| 2.7.1 power ON reset generation                 | 2-13       |
| 2.8 hardware and software standby               | 2-13       |
| 2.8.1 hardware standby                          | 2-13       |
| 2.8.2 software standby                          | 2-13       |
| 2.9 system clock control                        | 2-15       |
| 2.9.1 PLL configuration                         | 2-15       |
| 2.10 serial camera control bus (SCCB) interface | 2-19       |
| 2.10.1 data transfer protocol                   | 2-19       |
| 2.10.2 message format                           | 2-20       |
| 2.10.3 read/write operation                     | 2-20       |
| 2.10.4 SCCB timing                              | 2-23       |
| 2.10.5 group write                              | 2-24       |
| 2.11 hold                                       | 2-25       |
| 2.12 launch                                     | 2-25       |
| 2.12.1 launch mode 1 - quick manual launch      | 2-25       |
| 2.12.2 launch mode 2 - delay manual launch      | 2-25       |
| 2.12.3 launch mode 3 - quick auto launch        | 2-26       |
| 2.12.4 launch mode 4: delay auto launch         | 2-26       |
| 2.12.5 launch mode 5: repeat launch             | 2-26       |
| <b>3 block level description</b>                | <b>3-1</b> |
| 3.1 pixel array structure                       | 3-1        |
| 3.2 subsampling                                 | 3-2        |
| 3.3 alternate row HDR                           | 3-2        |

|                                                   |            |
|---------------------------------------------------|------------|
| <b>4 image sensor core digital functions</b>      | <b>4-1</b> |
| 4.1 mirror and flip                               | 4-1        |
| 4.2 image cropping and windowing                  | 4-2        |
| 4.3 test pattern                                  | 4-4        |
| 4.3.1 color bar                                   | 4-4        |
| 4.3.2 random data                                 | 4-4        |
| 4.3.3 transparent effect                          | 4-4        |
| 4.3.4 rolling bar effect                          | 4-5        |
| 4.4 black level calibration (BLC)                 | 4-5        |
| 4.5 one time programmable (OTP) memory            | 4-7        |
| 4.5.1 OTP other functions                         | 4-7        |
| 4.6 temperature sensor                            | 4-8        |
| 4.7 strobe flash                                  | 4-9        |
| 4.7.1 strobe flash control                        | 4-9        |
| 4.8 3D application capability                     | 4-13       |
| <b>5 image sensor processor digital functions</b> | <b>5-1</b> |
| 5.1 ISP general controls                          | 5-1        |
| 5.2 LENC                                          | 5-1        |
| 5.3 defect pixel cancellation (DPC)               | 5-8        |
| 5.4 white balance, exposure and gain control      | 5-9        |
| 5.4.1 manual white balance (MWB)                  | 5-9        |
| 5.4.2 manual exposure control (MEC)               | 5-10       |
| 5.4.3 manual gain control (MGC)                   | 5-11       |

|                                                   |            |
|---------------------------------------------------|------------|
| <b>6 register tables</b>                          | <b>6-1</b> |
| 6.1 system control [0x0100 - 0x303E]              | 6-1        |
| 6.2 PLL1 [0x0300 - 0x030A]                        | 6-6        |
| 6.3 PLL2 control [0x3600 - 0x3615]                | 6-7        |
| 6.4 SCCB [0x3100 - 0x3104]                        | 6-9        |
| 6.5 group hold [0x3200 - 0x3213]                  | 6-10       |
| 6.6 strobe [0x3B00 - 0x3B05]                      | 6-11       |
| 6.7 MEC control [0x3500 - 0x3508]                 | 6-13       |
| 6.8 MGC control [0x3504 - 0x3515]                 | 6-14       |
| 6.9 timing control [0x3800 - 0x3835]              | 6-15       |
| 6.10 BLC [0x4000 - 0x4041]                        | 6-18       |
| 6.11 ISP_top [0x5000 - 0x5065]                    | 6-19       |
| 6.12 digital gain [0x5500 - 0x550B]               | 6-21       |
| 6.13 illumination PWM [0x3B40 - 0x3B52]           | 6-22       |
| 6.14 OTP [0x7000 - 0x73FF, 0x3D80 - 0x3D91]       | 6-23       |
| 6.15 ADC sync [0x4500 - 0x4502]                   | 6-25       |
| 6.16 MIPI top [0x4800 - 0x4853]                   | 6-25       |
| 6.17 LVDS interface [0x4A00 - 0x4A0F]             | 6-34       |
| 6.18 temperature monitor [0x4D00 - 0x4D13]        | 6-35       |
| 6.19 LENC [0x5200 - 0x5256]                       | 6-35       |
| 6.20 test mode [0x3E00 - 0x3E13]                  | 6-41       |
| 6.21 test mode [0x4300 - 0x430D]                  | 6-41       |
| 6.22 ISPFC [0x4240 - 0x4243]                      | 6-41       |
| 6.23 VFIFO [0x4600 - 0x4604]                      | 6-42       |
| 6.24 ISP window [0x5A00 - 0x5A0C]                 | 6-42       |
| 6.25 DPC [0x5300 - 0x5327]                        | 6-44       |
| 6.26 color bar / scalar control [0x5E00 - 0x5E01] | 6-46       |
| <b>7 operating specifications</b>                 | <b>7-1</b> |
| 7.1 absolute maximum ratings                      | 7-1        |
| 7.2 functional temperature                        | 7-1        |
| 7.3 DC characteristics                            | 7-2        |
| 7.4 AC characteristics                            | 7-3        |
| 7.5 timing characteristics                        | 7-3        |

|                                                      |            |
|------------------------------------------------------|------------|
| <b>8 mechanical specifications</b>                   | <b>8-1</b> |
| 8.1 COB physical specifications                      | 8-1        |
| 8.2 reconstructed wafer (RW) physical specifications | 8-5        |
| <b>9 optical specifications</b>                      | <b>9-1</b> |
| 9.1 sensor array center                              | 9-1        |
| 9.2 lens chief ray angle (CRA)                       | 9-2        |
| <b>appendix A handling of RW devices</b>             | <b>A-1</b> |
| A.1 ESD /EOS prevention                              | A-1        |
| A.2 particles and cleanliness of environment         | A-1        |
| A.3 other requirements                               | A-1        |

## list of figures

|             |                                            |      |
|-------------|--------------------------------------------|------|
| figure 1-1  | pad diagram                                | 1-6  |
| figure 2-1  | OV13850 block diagram                      | 2-2  |
| figure 2-2  | MIPI timing                                | 2-5  |
| figure 2-3  | power up sequence (case 1)                 | 2-7  |
| figure 2-4  | power up sequence (case 2)                 | 2-8  |
| figure 2-5  | power down sequence (case 1)               | 2-11 |
| figure 2-6  | power down sequence (case 2)               | 2-12 |
| figure 2-7  | standby timing (case 1)                    | 2-14 |
| figure 2-8  | standby timing (case 2)                    | 2-14 |
| figure 2-9  | OV13850 PLL diagram                        | 2-15 |
| figure 2-10 | message type                               | 2-20 |
| figure 2-11 | SCCB single read from random location      | 2-20 |
| figure 2-12 | SCCB single read from current location     | 2-21 |
| figure 2-13 | SCCB sequential read from random location  | 2-21 |
| figure 2-14 | SCCB sequential read from current location | 2-21 |
| figure 2-15 | SCCB single write to random location       | 2-22 |
| figure 2-16 | SCCB sequential write to random location   | 2-22 |
| figure 2-17 | SCCB interface timing                      | 2-23 |
| figure 3-1  | sensor array region color filter layout    | 3-1  |
| figure 3-2  | example of 2x2 binning                     | 3-2  |
| figure 3-3  | alternate row HDR                          | 3-3  |
| figure 3-4  | HDR output timing                          | 3-3  |
| figure 4-1  | mirror and flip samples                    | 4-1  |
| figure 4-2  | image cropping and windowing               | 4-2  |
| figure 4-3  | color bar types                            | 4-4  |
| figure 4-4  | transparent effect                         | 4-5  |
| figure 4-5  | rolling bar effect                         | 4-5  |
| figure 4-6  | xenon flash mode                           | 4-9  |
| figure 4-7  | LED 1 & 2 mode - one pulse output          | 4-10 |
| figure 4-8  | LED 1 & 2 mode - multiple pulse output     | 4-11 |
| figure 4-9  | LED 3 mode                                 | 4-11 |
| figure 4-10 | LED 4 mode                                 | 4-12 |
| figure 4-11 | block diagram of 3D applications           | 4-13 |

|            |                                                |     |
|------------|------------------------------------------------|-----|
| figure 5-1 | control points of luminance and color channels | 5-2 |
| figure 5-2 | luminance compensation level calculation       | 5-2 |
| figure 8-1 | COB die specifications                         | 8-1 |
| figure 8-2 | OV13850 RW physical diagram                    | 8-6 |
| figure 9-1 | sensor array center                            | 9-1 |
| figure 9-2 | chief ray angle (CRA)                          | 9-2 |

Confidential for  
CMK

## list of tables

|            |                                                |      |
|------------|------------------------------------------------|------|
| table 1-1  | signal descriptions                            | 1-1  |
| table 1-2  | configuration under various conditions         | 1-4  |
| table 1-3  | pad symbol and equivalent circuit              | 1-6  |
| table 2-1  | format and frame rate                          | 2-2  |
| table 2-2  | I/O control registers                          | 2-3  |
| table 2-3  | MIPI timing specifications                     | 2-5  |
| table 2-4  | power up sequence                              | 2-6  |
| table 2-5  | power up sequence timing constraints           | 2-6  |
| table 2-6  | power down sequence                            | 2-9  |
| table 2-7  | power down sequence timing constraints         | 2-10 |
| table 2-8  | PLL1 registers                                 | 2-15 |
| table 2-9  | PLL2 registers                                 | 2-17 |
| table 2-10 | sample PLL configuration                       | 2-18 |
| table 2-11 | PLL speed limitation                           | 2-19 |
| table 2-12 | SCCB interface timing specifications           | 2-23 |
| table 2-13 | context switching control                      | 2-24 |
| table 3-1  | binning-related registers                      | 3-2  |
| table 3-2  | HDR control registers                          | 3-3  |
| table 4-1  | mirror and flip registers                      | 4-1  |
| table 4-2  | image cropping and windowing control functions | 4-2  |
| table 4-3  | BLC control registers                          | 4-5  |
| table 4-4  | OTP control registers                          | 4-7  |
| table 4-5  | temperature sensor functions                   | 4-8  |
| table 4-6  | flashlight modes                               | 4-9  |
| table 4-7  | LED strobe control registers                   | 4-12 |
| table 4-8  | vertical signal synchronize control registers  | 4-14 |
| table 5-1  | ISP general control registers                  | 5-1  |
| table 5-2  | LENC registers                                 | 5-3  |
| table 5-3  | DPC control registers                          | 5-8  |
| table 5-4  | MWB control registers                          | 5-9  |
| table 5-5  | MEC control registers                          | 5-10 |
| table 5-6  | MGC control registers                          | 5-11 |
| table 6-1  | system control registers                       | 6-1  |

|            |                                        |      |
|------------|----------------------------------------|------|
| table 6-2  | PLL1 registers                         | 6-6  |
| table 6-3  | PLL2 registers                         | 6-7  |
| table 6-4  | SCCB control registers                 | 6-9  |
| table 6-5  | group hold registers                   | 6-10 |
| table 6-6  | strobe control registers               | 6-11 |
| table 6-7  | MEC control registers                  | 6-13 |
| table 6-8  | MGC control registers                  | 6-14 |
| table 6-9  | timing control registers               | 6-15 |
| table 6-10 | BLC control registers                  | 6-18 |
| table 6-11 | ISP_top registers                      | 6-19 |
| table 6-12 | digital gain registers                 | 6-21 |
| table 6-13 | illumination PWM registers             | 6-22 |
| table 6-14 | OTP registers                          | 6-23 |
| table 6-15 | ADC sync registers                     | 6-25 |
| table 6-16 | MIPI top registers                     | 6-25 |
| table 6-17 | LVDS interface registers               | 6-34 |
| table 6-18 | temperature monitor registers          | 6-35 |
| table 6-19 | LENC registers                         | 6-35 |
| table 6-20 | test mode registers                    | 6-41 |
| table 6-21 | test mode registers                    | 6-41 |
| table 6-22 | ISPFC registers                        | 6-41 |
| table 6-23 | VFIFO registers                        | 6-42 |
| table 6-24 | ISP window registers                   | 6-42 |
| table 6-25 | DPC registers                          | 6-44 |
| table 6-26 | color bar/scalar control registers     | 6-46 |
| table 7-1  | absolute maximum ratings               | 7-1  |
| table 7-2  | functional temperature                 | 7-1  |
| table 7-3  | DC characteristics (-30°C < TJ < 85°C) | 7-2  |
| table 7-4  | AC characteristics                     | 7-3  |
| table 7-5  | timing characteristics                 | 7-3  |
| table 8-1  | pad location coordinates               | 8-2  |
| table 8-2  | RW physical dimensions                 | 8-5  |
| table 9-1  | CRA versus image height plot           | 9-2  |

# 1 signal descriptions

**table 1-1** lists the signal descriptions and their corresponding pad numbers for the OV13850 image sensor. The die information is shown in **section 8**.

**table 1-1** signal descriptions (sheet 1 of 3)

| pad number | signal name  | pad type  | description                                                                  |
|------------|--------------|-----------|------------------------------------------------------------------------------|
| 1          | DVDD         | reference | power for digital circuit                                                    |
| 2          | DOGND        | ground    | ground for I/O circuit                                                       |
| 3          | AGND         | ground    | ground for analog circuit                                                    |
| 4          | AGND         | ground    | ground for analog circuit                                                    |
| 5          | AVDD         | power     | power for analog circuit                                                     |
| 6          | AVDD         | power     | power for analog circuit                                                     |
| 7          | DVDD         | reference | power for digital circuit                                                    |
| 8          | <b>GPIO1</b> | I/O       | general purpose I/O                                                          |
| 9          | <b>SID</b>   | input     | SCCB ID select<br>0: SCCB device address 0x20<br>1: SCCB device address 0x6C |
| 10         | <b>ILPWM</b> | I/O       | illumination control                                                         |
| 11         | <b>GPIO</b>  | I/O       | general purpose I/O                                                          |
| 12         | <b>FSIN</b>  | I/O       | frame sync input                                                             |
| 13         | <b>FREX</b>  | I/O       | frame exposure input                                                         |
| 14         | DOGND        | ground    | ground for I/O circuit                                                       |
| 15         | DOGND        | ground    | ground for I/O circuit                                                       |
| 16         | DVDD         | reference | power for digital circuit                                                    |
| 17         | DVDD         | reference | power for digital circuit                                                    |
| 18         | <b>HREF</b>  | I/O       | HREF output                                                                  |
| 19         | <b>SIOD</b>  | I/O       | SCCB data                                                                    |
| 20         | NC           | —         | no connect                                                                   |
| 21         | <b>SIOC</b>  | input     | SCCB clock                                                                   |
| 22         | NC           | —         | no connect                                                                   |
| 23         | AVDD         | power     | power for analog circuit                                                     |
| 24         | DOVDD        | power     | power for I/O circuit                                                        |

table 1-1 signal descriptions (sheet 2 of 3)

| pad number | signal name      | pad type  | description                                                        |
|------------|------------------|-----------|--------------------------------------------------------------------|
| 25         | DOVDD            | power     | power for I/O circuit                                              |
| 26         | DVDD             | reference | power for digital circuit                                          |
| 27         | DVDD             | reference | power for digital circuit                                          |
| 28         | DOGND            | ground    | ground for I/O circuit                                             |
| 29         | DOGND            | ground    | ground for I/O circuit                                             |
| 30         | <b>ATEST0</b>    | reference | internal analog reference                                          |
| 31         | DOGND            | ground    | ground for I/O circuit                                             |
| 32         | DOGND            | ground    | ground for I/O circuit                                             |
| 33         | DVDD             | reference | power for digital circuit                                          |
| 34         | DVDD             | reference | power for digital circuit                                          |
| 35         | AVDD             | power     | power for analog circuit                                           |
| 36         | AVDD             | power     | power for analog circuit                                           |
| 37         | AGND             | ground    | ground for analog circuit                                          |
| 38         | AGND             | ground    | ground for analog circuit                                          |
| 39         | AGND             | ground    | ground for analog circuit                                          |
| 40         | AVDD             | power     | power for analog circuit                                           |
| 41         | DOGND            | ground    | ground for I/O circuit                                             |
| 42         | DVDD             | reference | power for digital circuit                                          |
| 43         | <b>VH</b>        | reference | internal analog reference                                          |
| 44         | <b>VN</b>        | reference | internal analog reference                                          |
| 45         | DOVDD            | power     | power for I/O circuit                                              |
| 46         | <b>XSHUTDOWN</b> | input     | reset and power down (active low with internal pull down resistor) |
| 47         | <b>PWDNB</b>     | input     | power down (active low with internal pull up resistor)             |
| 48         | AGND             | ground    | ground for analog circuit                                          |
| 49         | AVDD             | power     | power for analog circuit                                           |
| 50         | <b>TM</b>        | input     | scan chain (active high with internal pull down resistor)          |
| 51         | <b>STROBE</b>    | I/O       | strobe output                                                      |
| 52         | DOVDD            | power     | power for I/O circuit                                              |
| 53         | <b>MDP2</b>      | I/O       | MIPI TX data lane 2 positive output                                |

table 1-1 signal descriptions (sheet 3 of 3)

| pad number | signal name   | pad type  | description                         |
|------------|---------------|-----------|-------------------------------------|
| 54         | <b>MDN2</b>   | I/O       | MIPI TX data lane 2 negative output |
| 55         | EVDD          | reference | power for MIPI TX circuit           |
| 56         | <b>MDP0</b>   | I/O       | MIPI TX data lane 0 positive output |
| 57         | <b>MDN0</b>   | I/O       | MIPI TX data lane 0 negative output |
| 58         | EGND          | ground    | ground for MIPI TX circuit          |
| 59         | PVDD          | power     | power for PLL circuit               |
| 60         | EGND          | ground    | ground for MIPI TX circuit          |
| 61         | EVDD          | reference | power for MIPI TX circuit           |
| 62         | <b>MCP</b>    | I/O       | MIPI TX clock lane positive output  |
| 63         | <b>MCN</b>    | I/O       | MIPI TX clock lane negative output  |
| 64         | EGND          | ground    | ground for MIPI TX circuit          |
| 65         | <b>MDP1</b>   | I/O       | MIPI TX data lane 1 positive output |
| 66         | <b>MDN1</b>   | I/O       | MIPI TX data lane 1 negative output |
| 67         | EVDD          | reference | power for MIPI TX circuit           |
| 68         | <b>MDP3</b>   | I/O       | MIPI TX data lane 3 positive output |
| 69         | <b>MDN3</b>   | I/O       | MIPI TX data lane 3 negative output |
| 70         | DOGND         | ground    | ground for I/O circuit              |
| 71         | <b>VSYNC</b>  | I/O       | VSYNC output                        |
| 72         | <b>EXTCLK</b> | input     | system input clock                  |
| 73         | DOGND         | ground    | ground for I/O circuit              |
| 74         | DOGND         | ground    | ground for I/O circuit              |
| 75         | DVDD          | reference | power for digital circuit           |
| 76         | DVDD          | reference | power for digital circuit           |

table 1-2 configuration under various conditions (sheet 1 of 2)

| pad number | signal name | RESET <sup>a</sup> | after RESET release <sup>b</sup>      | software standby                      | hardware standby <sup>c</sup>         |
|------------|-------------|--------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| 8          | GPIO1       | high-z             | input                                 | high-z by default (configurable)      | high-z by default (configurable)      |
| 9          | SID         | input              | input                                 | input                                 | input                                 |
| 10         | ILPWM       | output zero        | output zero by default (configurable) | output zero by default (configurable) | output zero by default (configurable) |
| 11         | GPIO        | high-z             | input                                 | high-z by default (configurable)      | high-z by default (configurable)      |
| 12         | FSIN        | high-z             | input                                 | high-z by default (configurable)      | high-z by default (configurable)      |
| 13         | FREX        | high-z             | input                                 | high-z by default (configurable)      | high-z by default (configurable)      |
| 18         | HREF        | high-z             | input by default (configurable)       | high-z by default (configurable)      | high-z by default (configurable)      |
| 19         | SIOD        | high-z             | input                                 | input                                 | high-z                                |
| 21         | SIOC        | high-z             | input                                 | input                                 | high-z                                |
| 30         | ATEST0      | high-z             | open drain                            | open drain                            | high-z                                |
| 43         | VH          | high-z             | open drain                            | open drain                            | high-z                                |
| 44         | VN          | high-z             | open drain                            | open drain                            | high-z                                |
| 46         | XSHUTDOWN   | input              | input                                 | input                                 | input                                 |
| 47         | PWDNB       | input              | input                                 | input                                 | input                                 |
| 50         | TM          | input              | input                                 | input                                 | input                                 |
| 51         | STROBE      | output zero        | output zero by default (configurable) | output zero by default (configurable) | output zero by default (configurable) |
| 53         | MDP2        | high-z             | high                                  | high by default (configurable)        | high by default (configurable)        |
| 54         | MDN2        | high-z             | high                                  | high by default (configurable)        | high by default (configurable)        |
| 56         | MDP0        | high-z             | high                                  | high by default (configurable)        | high by default (configurable)        |
| 57         | MDN0        | high-z             | high                                  | high by default (configurable)        | high by default (configurable)        |
| 62         | MCP         | high-z             | high                                  | high by default (configurable)        | high by default (configurable)        |

table 1-2 configuration under various conditions (sheet 2 of 2)


| pad number | signal name | RESET <sup>a</sup> | after RESET release <sup>b</sup> | software standby                 | hardware standby <sup>c</sup>    |
|------------|-------------|--------------------|----------------------------------|----------------------------------|----------------------------------|
| 63         | MCN         | high-z             | high                             | high by default (configurable)   | high by default (configurable)   |
| 65         | MDP1        | high-z             | high                             | high by default (configurable)   | high by default (configurable)   |
| 66         | MDN1        | high-z             | high                             | high by default (configurable)   | high by default (configurable)   |
| 68         | MDP3        | high-z             | high                             | high by default (configurable)   | high by default (configurable)   |
| 69         | MDN3        | high-z             | high                             | high by default (configurable)   | high by default (configurable)   |
| 71         | VSYNC       | high-z             | input by default (configurable)  | high-z by default (configurable) | high-z by default (configurable) |
| 72         | EXTCLK      | input              | input                            | input                            | high-z                           |

a. XSHUTDOWN = 0

b. XSHUTDOWN from 0 to 1

c. PWDNB = 0

figure 1-1 pad diagram

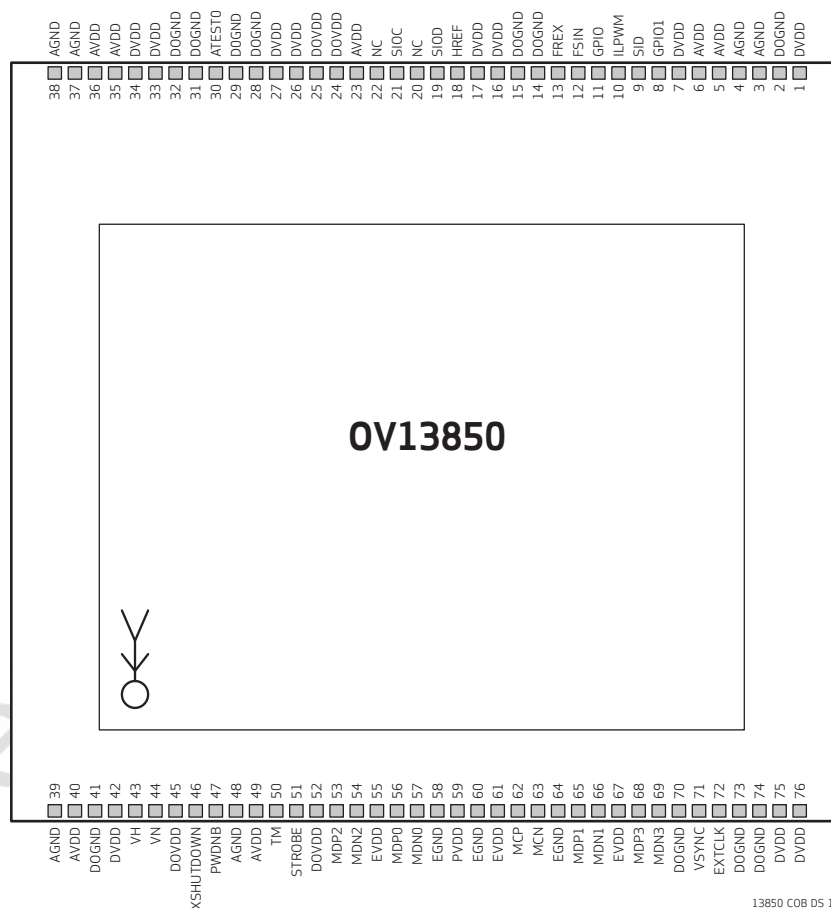

**table 1-3** pad symbol and equivalent circuit (sheet 1 of 2)

| symbol | equivalent circuit |
|--------|--------------------|
| EXTCLK |                    |
| SIOD   |                    |

table 1-3 pad symbol and equivalent circuit (sheet 2 of 2)

| symbol                                                                      | equivalent circuit |
|-----------------------------------------------------------------------------|--------------------|
| SIOC                                                                        |                    |
| VSYNC, HREF, STROBE, ILPWM, FREX, FSIN, GPIO, GPIO1                         |                    |
| AVDD, EVDD, DOVDD, DVDD, PVDD                                               |                    |
| PWDNB                                                                       |                    |
| TM, XSHUTDOWN                                                               |                    |
| SID                                                                         |                    |
| VN, VH                                                                      |                    |
| MCP, MCN, MDP0, MDN0, MDP1, MDN1, MDP2, MDN2, MDP3, MDN3, EGND, AGND, DOGND |                    |

**OV13850**

color CMOS 13.2 megapixel (4224 x 3136) image sensor with OmniBSI-3™ technology

Confidential for  
CMK

## 2 system level description

### 2.1 overview

The OV13850 (RAW RGB) image sensor is a low voltage, high performance 1/3.06-inch 13 megapixel CMOS image sensor that provides the functionality of a single 13 megapixel (4224X3136) camera using OmniBSI-3™ technology. It provides full-frame, sub-sampled, and windowed MIPI images in various formats via the control of the Serial Camera Control Bus (SCCB) interface.

The OV13850 has an image array capable of operating at up to 30 frames per second (fps) in 10-bit 13 megapixel resolution with complete user control over image quality, formatting and output data transfer. All required image processing functions, including exposure control, white balance, defective pixel canceling, etc., are programmable through the SCCB interface.

In addition, OmniVision image sensors use proprietary sensor technology to improve image quality by reducing or eliminating common lighting/electrical sources of image contamination, such as fixed pattern noise, smearing, etc., to produce a clean, fully stable, color image.

For customized information purposes, the OV13850 includes one-time programmable (OTP) memory. The OV13850 has four lanes of MIPI interface.


### 2.2 architecture

The OV13850 sensor core generates streaming pixel data at a constant frame rate. **figure 2-1** shows the functional block diagram of the OV13850 image sensor.

The timing generator outputs clocks to access the rows of the imaging array, precharging and sampling rows of the array sequentially. In the time between precharging and sampling a row, the charge in the pixels decrease with exposure to incident light. This is the exposure time in rolling shutter architecture.

The exposure time is controlled by adjusting the time interval between precharging and sampling. After the data of the pixels in the row has been sampled, it is processed through analog circuitry to correct the offset and multiply the data with corresponding gain. Following analog processing is the ADC which outputs 10-bit data for each pixel in the array.

figure 2-1 OV13850 block diagram

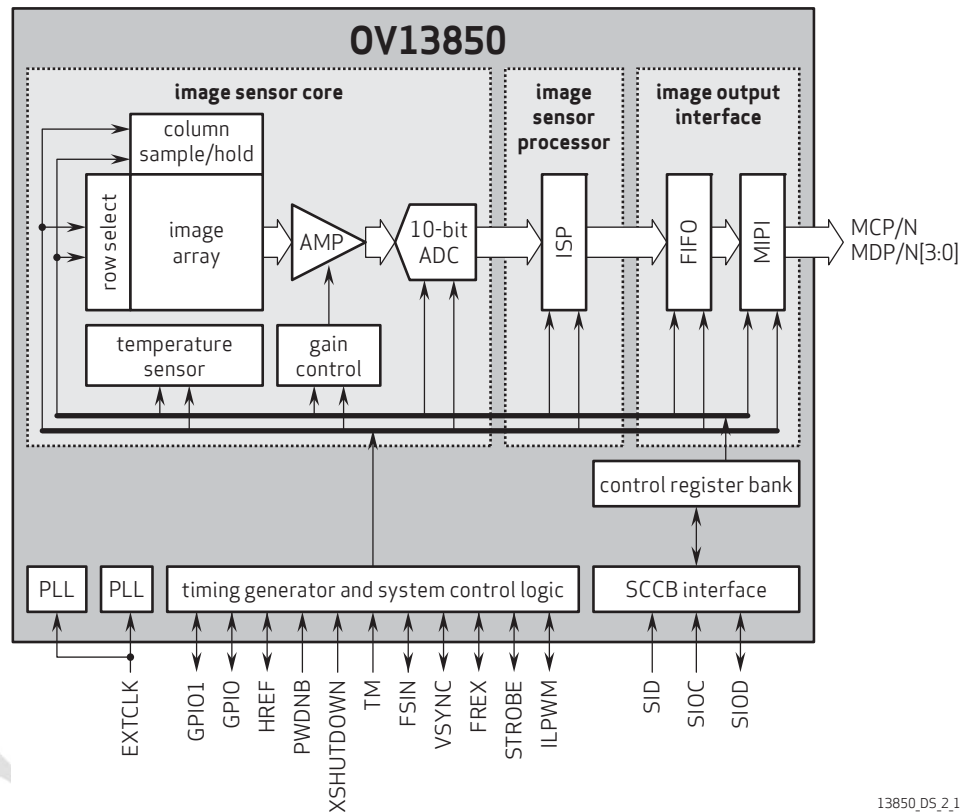

13850\_DS\_2\_1

## 2.3 format and frame

The OV13850 supports RAW RGB output with 1/2/4 lane MIPI interfaces as listed in [table 2-1](#).

table 2-1 format and frame rate

| format              | resolution  | maximum output | methodology                                                                                 |
|---------------------|-------------|----------------|---------------------------------------------------------------------------------------------|
| 13.2 megapixel      | 4224 x 3136 | 30 fps         | full resolution                                                                             |
| 2x binning          | 2112x1568   | 60 fps         | 2x2 binning<br>1080p EIS 2112x1188 60fps by cropping<br>720p EIS 1408x792 60fps by cropping |
| 10 megapixel (16:9) | 4224x2376   | 30 fps         | cropping                                                                                    |

## 2.4 I/O control

I/O pads on the OV13850 can be configured as inputs or outputs. The output signals can come either from a data path or registers.

**table 2-2** I/O control registers (sheet 1 of 2)

| function                        | register | description                                                                                                        |
|---------------------------------|----------|--------------------------------------------------------------------------------------------------------------------|
| output drive capability control | 0x3009   | Bit[6:5]: I/O pad drive capability<br>00: 1x<br>01: 2x<br>10: 3x<br>11: 4x                                         |
| VSYNC I/O control               | 0x3002   | Bit[7]: input/output control for VSYNC pad<br>0: input<br>1: output                                                |
| VSYNC output select             | 0x3008   | Bit[7]: output selection for VSYNC pad<br>0: normal data path (vertical sync signal)<br>1: register control value  |
| VSYNC output value              | 0x3005   | Bit[7]: VSYNC output value                                                                                         |
| FREX I/O control                | 0x3002   | Bit[4]: input/output control for FREX pad<br>0: input<br>1: output                                                 |
| FREX output select              | 0x3008   | Bit[5]: output selection for FREX pad<br>0: normal data path<br>1: register control value                          |
| FREX output value               | 0x3005   | Bit[4]: FREX output value                                                                                          |
| STROBE output select            | 0x3008   | Bit[4]: output selection for STROBE pad<br>0: normal data path<br>1: register control value                        |
| STROBE output value             | 0x3005   | Bit[2]: STROBE output value                                                                                        |
| HREF I/O control                | 0x3002   | Bit[6]: input/output control for HREF pad<br>0: input<br>1: output                                                 |
| HREF output select              | 0x3008   | Bit[6]: output selection for HREF pad<br>0: normal data path (horizontal sync signal)<br>1: register control value |
| HREF output value               | 0x3005   | Bit[6]: HREF output value                                                                                          |
| FSIN I/O control                | 0x3002   | Bit[3]: input/output control for FSIN pad<br>0: input<br>1: output                                                 |


table 2-2 I/O control registers (sheet 2 of 2)

| function            | register | description |                                                                                                                 |
|---------------------|----------|-------------|-----------------------------------------------------------------------------------------------------------------|
| FSIN output select  | 0x3008   | Bit[3]:     | output selection for FSIN pad<br>0: normal data path (illumination control signal)<br>1: register control value |
| FSIN output value   | 0x3005   | Bit[3]:     | FSIN output value                                                                                               |
| GPIO I/O control    | 0x3002   | Bit[0]:     | input/output control for GPIO pad<br>0: input<br>1: output                                                      |
| GPIO output select  | 0x3008   | Bit[0]:     | output selection for GPIO pad<br>0: normal data path<br>1: register control value                               |
| GPIO output value   | 0x3005   | Bit[0]:     | GPIO output value                                                                                               |
| GPIO1 I/O control   | 0x3002   | Bit[1]:     | input/output control for GPIO1 pad<br>0: input<br>1: output                                                     |
| GPIO1 output select | 0x3008   | Bit[1]:     | output selection for GPIO1 pad<br>0: normal data path<br>1: register control value                              |
| GPIO1 output value  | 0x3005   | Bit[1]:     | GPIO1 output value                                                                                              |

## 2.5 MIPI interface

The OV13850 supports a 1, 2 and 4-lane MIPI extended D-PHY transmitter interface with a maximum data transfer rate of 1200 Mbps per lane with slew rate control.

**figure 2-2** MIPI timing

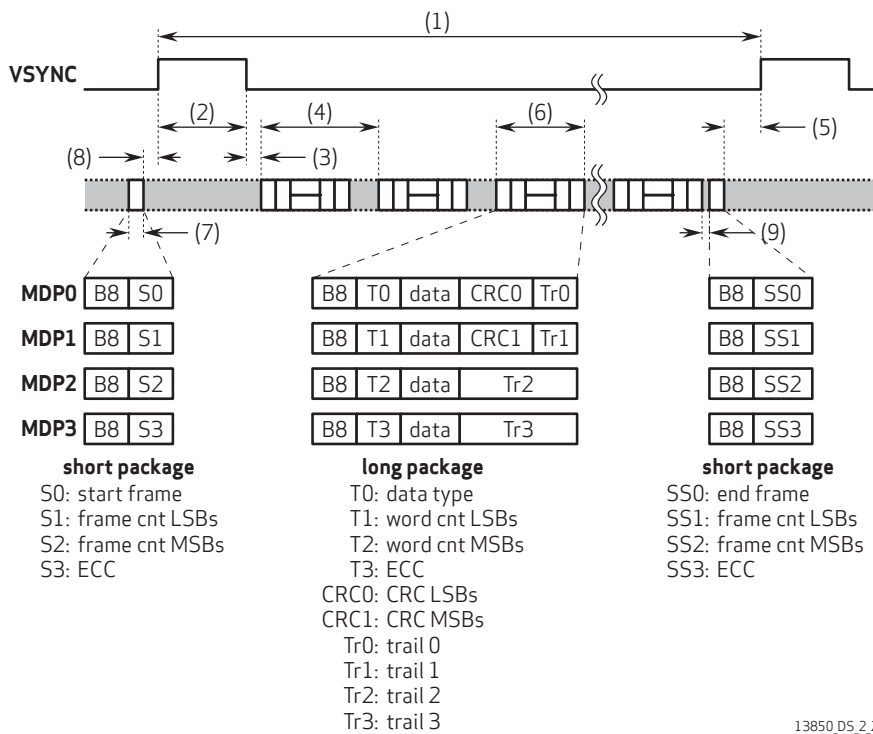

**table 2-3** MIPI timing specifications

| mode                                | timing     |
|-------------------------------------|------------|
| 13 Megapixel<br>4208x3120<br>30 fps | (1) TBD tp |
|                                     | (2) TBD tp |
|                                     | (3) TBD tp |
|                                     | (4) TBD tp |
|                                     | (5) TBD tp |
|                                     | (6) TBD tp |
|                                     | (7) TBD tp |
|                                     | (8) TBD tp |
|                                     | (9) TBD tp |
| where tp = Tclk                     |            |

## 2.6 power management

### 2.6.1 power up sequence

The OV13850 uses three power supplies: 2.8V AVDD, 1.8V DOVDD and 1.2V DVDD.

To avoid any glitch from a strong external noise source, OmniVision recommends controlling XSHUTDOWN or PWDNB by GPIO and tying the other pin to DOVDD.

Whether or not XSHUTDOWN is controlled by GPIO, the XSHUTDOWN rising cannot occur before AVDD or DOVDD.

**table 2-4** power up sequence

| case | XSHUTDOWN | PWDNB | power up sequence requirement                                                                                                                                                                                |
|------|-----------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | GPIO      | DOVDD | Refer to <b>figure 2-3</b><br>1. DOVDD rising must occur before DVDD rising<br>2. AVDD rising can occur before or after DOVDD rising<br>3. XSHUTDOWN rising must occur after AVDD, DOVDD and DVDD are stable |
| 2    | DOVDD     | GPIO  | Refer to <b>figure 2-4</b><br>1. AVDD rising occurs before DOVDD rising<br>2. DOVDD rising occurs before DVDD<br>3. PWDNB rising occurs after DVDD rising                                                    |

**table 2-5** power up sequence timing constraints

| constraint                                                           | label | min                              | max | unit          |
|----------------------------------------------------------------------|-------|----------------------------------|-----|---------------|
| AVDD rising – DOVDD rising                                           | t0    | 0                                | ∞   | ns            |
| DOVDD rising – AVDD rising                                           | t1    |                                  |     | ns            |
| AVDD or DOVDD rising, whichever is last – XSHUTDOWN rising           | t2    | 0.0                              |     | ns            |
| XSHUTDOWN rising – first CCI transaction                             | t3    | 8192                             |     | EXTCLK cycles |
| minimum number of EXTCLK cycles prior to the first CCI transaction   | t4    | 8192                             |     | EXTCLK cycles |
| entering streaming mode – first frame start sequence (fixed part)    | t5    |                                  | 10  | ms            |
| entering streaming mode – first frame start sequence (variable part) | t6    | delay is the exposure time value |     | lines         |
| AVDD or DOVDD, whichever is last – DVDD                              | t7    | 0.0                              | ∞   | ns            |
| DVDD - PWDNB rising                                                  | t8    | 0                                | ∞   | ns            |
| DVDD - XSHUTDOWN rising                                              | t9    | 0                                | ∞   | ns            |

figure 2-3 power up sequence (case 1)


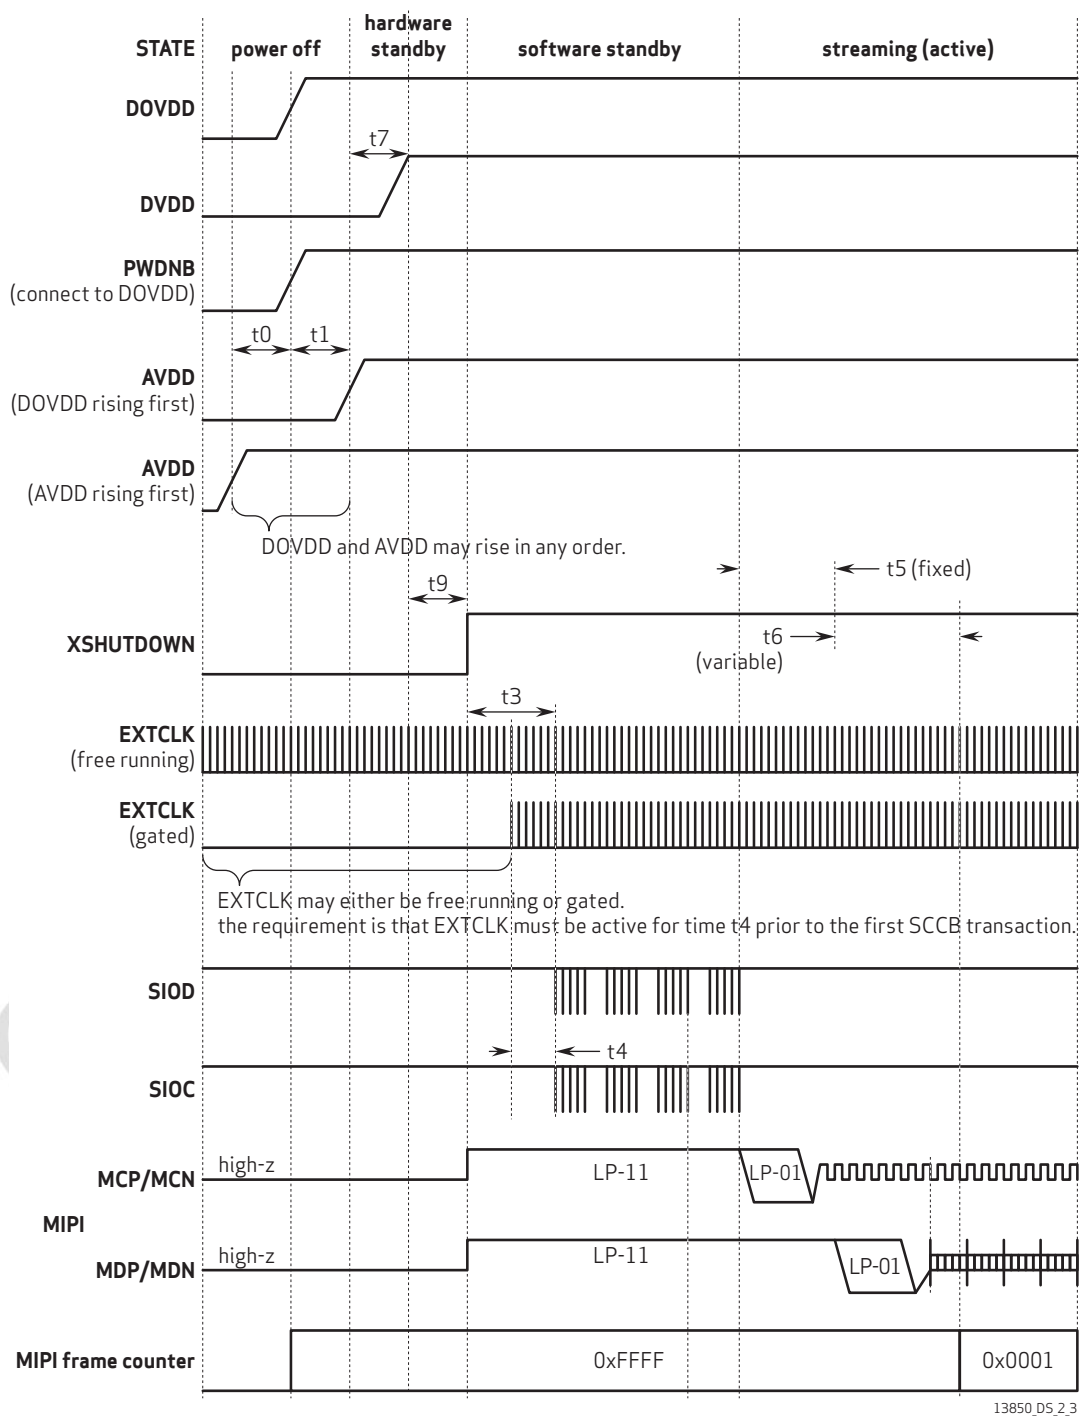


figure 2-4 power up sequence (case 2)

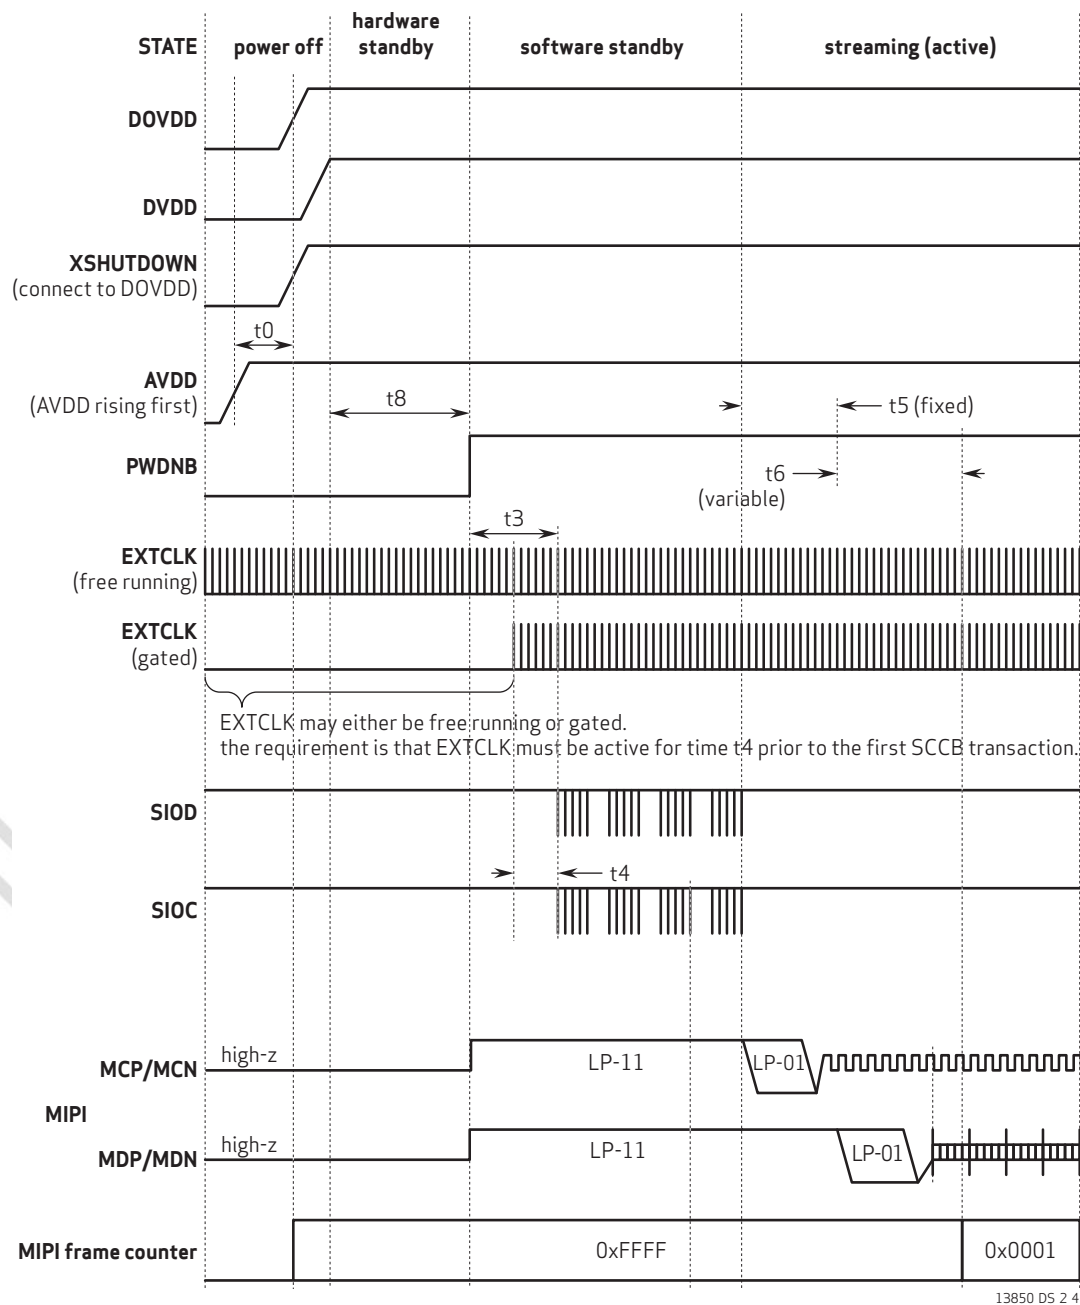

## 2.6.2 power down sequence

Similar to the power up sequence, the EXTCLK input clock may be either gated or continuous. If the SCCB command to exit streaming is received while a frame of MIPI data is being output, then the sensor must wait to the MIPI frame end code before entering software standby mode.

If the SCCB command to exit streaming mode is received during the inter frame time, then the sensor must enter software standby mode immediately.

Power down cases 1~2 corresponds to power up sequences 1~2, respectively.


**table 2-6** power down sequence

| case | XSHUTDOWN | PWDNB | power down sequence requirement                                                                                                                                                                                                                         |
|------|-----------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | GPIO      | DOVDD | Refer to <b>figure 2-5</b><br>1. software standby recommended<br>2. pull XSHUTDOWN low for low power consumption<br>3. cut off DVDD, then it will be in hardware standby state for minimum power consumption<br>4. pull AVDD and DOVDD low in any order |
| 2    | DOVDD     | GPIO  | Refer to <b>figure 2-6</b><br>1. software standby recommended<br>2. pull PWDNB low for low power consumption<br>3. cut off DVDD, then it will be in hardware standby mode for minimum power consumption<br>4. turn off DOVDD<br>5. turn off AVDD        |

table 2-7 power down sequence timing constraints

| constraint                                                                    | label | min                                                                                                                                                                          | max | unit          |
|-------------------------------------------------------------------------------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|---------------|
| enter software standby SCCB command<br>device in software standby mode        | t0    | when a frame of MIPI data is output,<br>wait for the MIPI end code before<br>entering the software for standby;<br>otherwise, enter the software<br>standby mode immediately |     |               |
| minimum of EXTCLK cycles after the last<br>SCCB transaction or MIPI frame end | t1    | 512                                                                                                                                                                          |     | EXTCLK cycles |
| last SCCB transaction or MIPI frame end,<br>XSHUTDOWN falling                 | t2    | 512                                                                                                                                                                          |     | EXTCLK cycles |
| XSHUTDOWN falling – AVDD falling or<br>DOVDD falling whichever is first       | t3    | 0.0                                                                                                                                                                          |     | ns            |
| AVDD falling – DOVDD falling                                                  | t4    | AVDD and DOVDD may fall in any<br>order, the falling separation can<br>vary from 0 ns to infinity                                                                            |     |               |
| DOVDD falling – AVDD falling                                                  | t5    |                                                                                                                                                                              |     |               |
| XSHUTDOWN falling – external DVDD<br>falling                                  | t6    | 0.0                                                                                                                                                                          |     | ns            |
| external DVDD falling – AVDD falling or<br>DOVDD falling whichever is first   | t7    | 0.0                                                                                                                                                                          |     | ns            |
| PWDNB falling – external DVDD falling                                         | t8    | 0.0                                                                                                                                                                          |     | ns            |


figure 2-5 power down sequence (case 1)

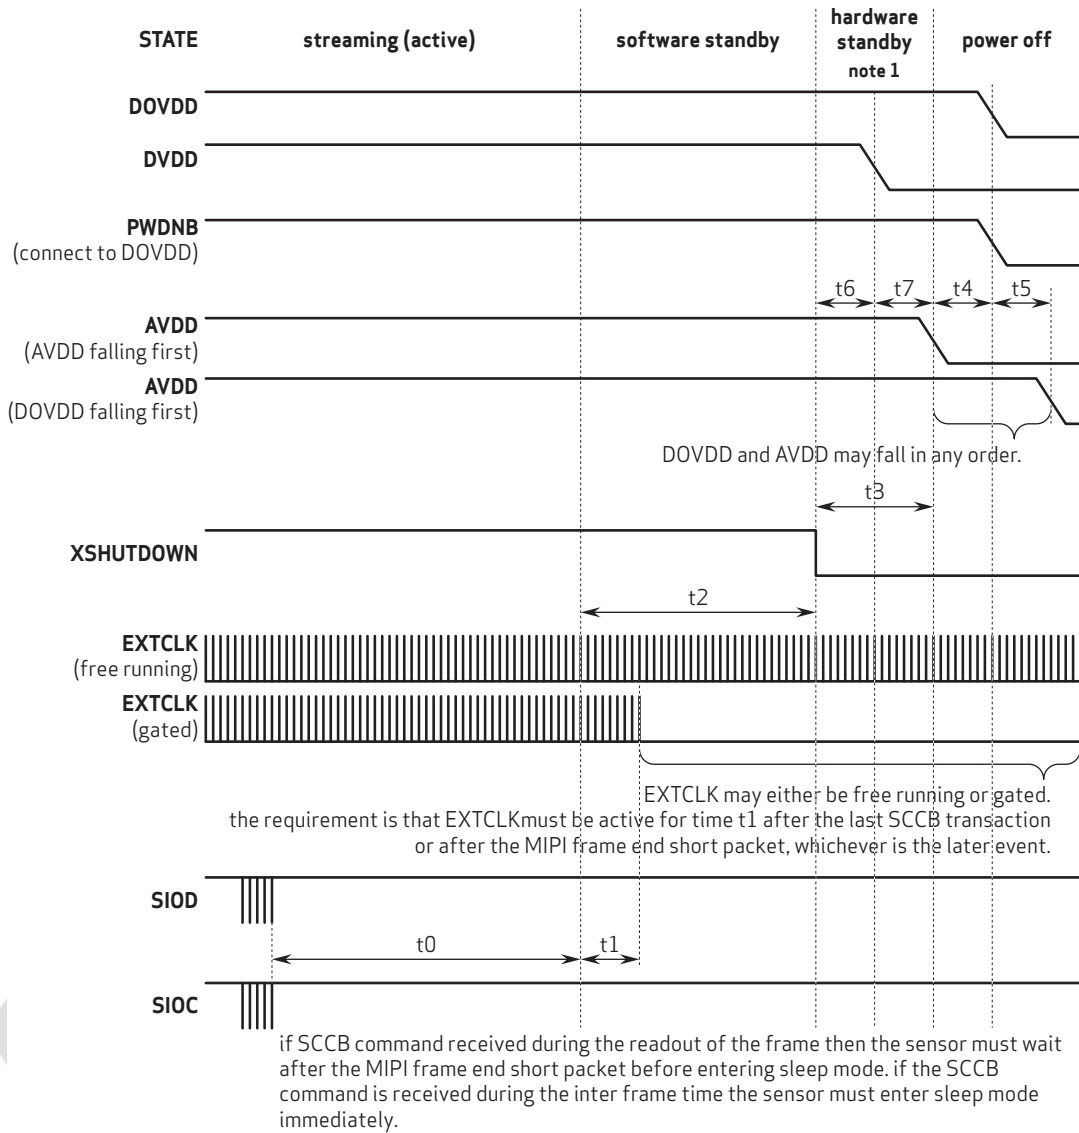

note 1 with minimum power consumption

13850\_DS\_2\_5

figure 2-6 power down sequence (case 2)

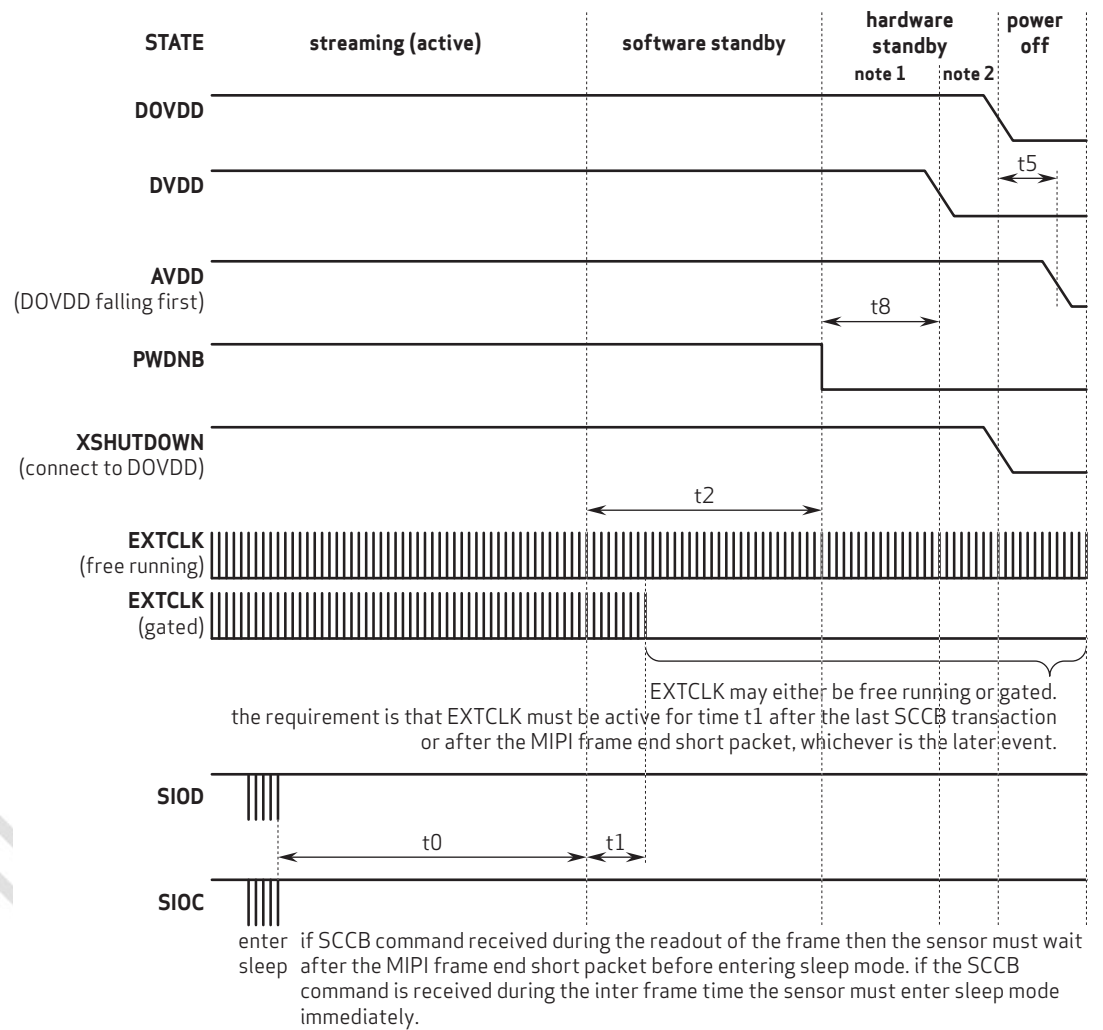**note 1** with low power consumption**note 2** with minimum power consumption

13850\_DS\_2\_6

## 2.7 reset

The OV13850 sensor includes a **XSHUTDOWN** pad (pad **46**) that forces a complete hardware reset when it is pulled low (GND). The OV13850 clears all registers and resets them to their default values when a hardware reset occurs. Reset requires ~2ms settling time.

### 2.7.1 power ON reset generation

The power on reset can be controlled from XSHUTDOWN pin. Additionally, inside this chip, a power on reset is generated after core power becomes stable.

## 2.8 hardware and software standby

Two suspend modes are available for the OV13850:

- **hardware standby**
- **software standby**

### 2.8.1 hardware standby

To initiate a hardware standby, the **PWDNB** pad (pad **47**) must be tied to low. When this occurs, the OV13850 internal device clock is halted and all internal counters are reset and register values are maintained.

### 2.8.2 software standby

Executing a software standby through the SCCB interface suspends internal circuit activity but does not halt the device clock. All register content is maintained in standby mode.

figure 2-7 standby timing (case 1)


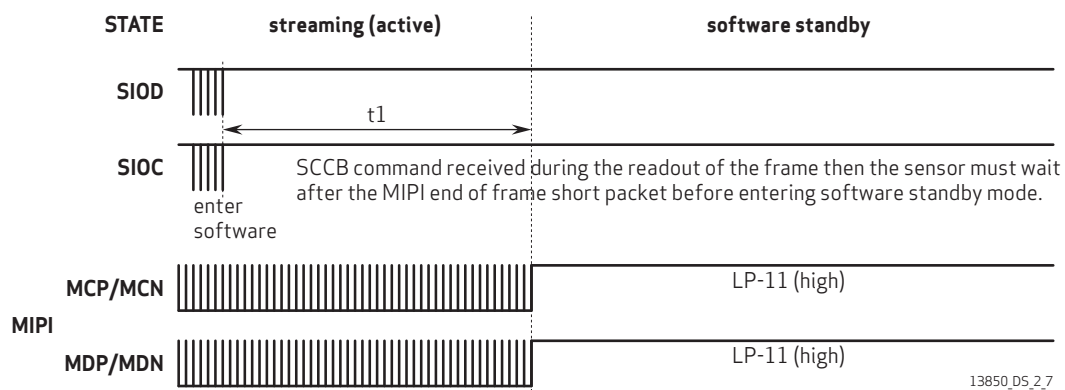


figure 2-8 standby timing (case 2)

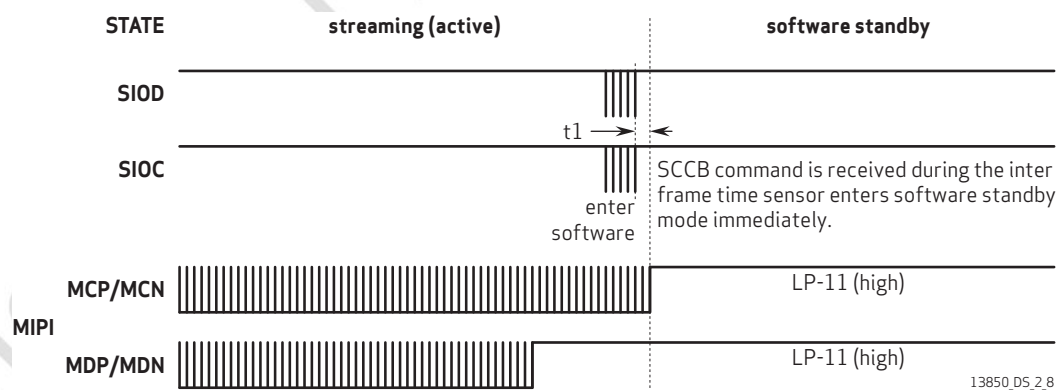


## 2.9 system clock control

The OV13850 has two on-chip PLLs which generate the system clock from a 6~64 MHz input clock. A programmable clock divider is provided to generate different frequencies for the system.

### 2.9.1 PLL configuration

figure 2-9 OV13850 PLL diagram

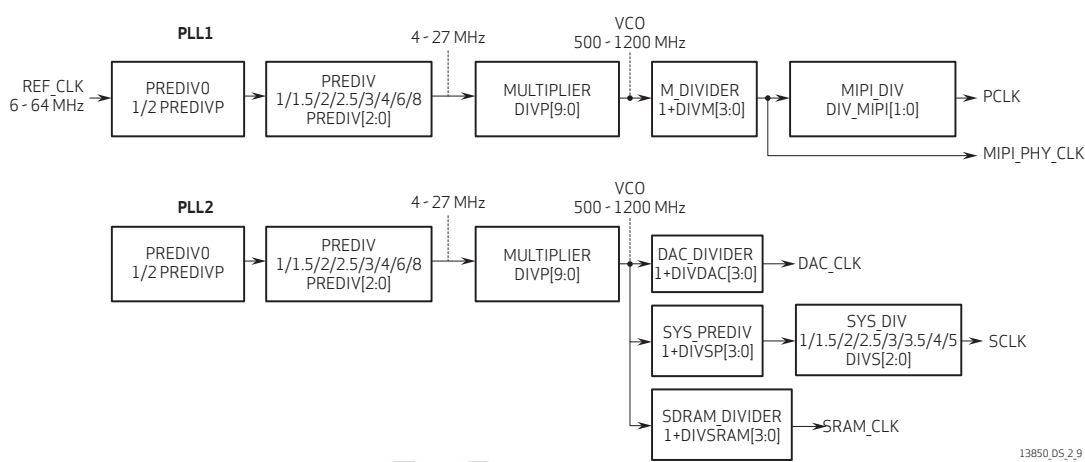

#### note

Contact your local OmniVision FAE for additional assistance on PLL configuration.

table 2-8 PLL1 registers (sheet 1 of 2)

| address | register name | default value | R/W | description                                                                                                       |
|---------|---------------|---------------|-----|-------------------------------------------------------------------------------------------------------------------|
| 0x0300  | PLL1_CTRL_0   | 0x00          | RW  | Bit[2:0]: PLL1_PREDIV<br>000: /1<br>001: /1.5<br>010: /2<br>011: /2.5<br>100: /3<br>101: /4<br>110: /6<br>111: /8 |
| 0x0301  | PLL1_CTRL_1   | 0x00          | RW  | Bit[1:0]: PLL1_DIVP[9:8]                                                                                          |
| 0x0302  | PLL1_CTRL_2   | 0x2A          | RW  | Bit[7:0]: PLL1_DIVP[7:0]                                                                                          |

table 2-8 PLL1 registers (sheet 2 of 2)

| address | register name | default value | R/W | description                                                                                                                                                                                                                |
|---------|---------------|---------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x0303  | PLL1_CTRL_3   | 0x00          | RW  | Bit[3:0]: PLL1_DIVM<br>0000: /1<br>0001: /2<br>0010: /3<br>0011: /4<br>0100: /5<br>0101: /6<br>0110: /7<br>0111: /8<br>1000: /9<br>1001: /10<br>1010: /11<br>1011: /12<br>1100: /13<br>1101: /14<br>1110: /15<br>1111: /16 |
| 0x0304  | PLL1_CTRL_4   | 0x03          | RW  | Bit[1:0]: PLL1_DIV_MIPI<br>00: /4<br>01: /5<br>10: /6<br>11: /8                                                                                                                                                            |
| 0x0305  | PLL1_CTRL_5   | 0x01          | RW  | Bit[1:0]: PLL1_DIV_SP<br>00: /3<br>01: /4<br>10: /5<br>11: /6                                                                                                                                                              |
| 0x0306  | PLL1_CTRL_6   | 0x01          | RW  | Bit[0]: PLL1_DIV_S<br>0: /1<br>1: /2                                                                                                                                                                                       |
| 0x0308  | PLL1_CTRL_8   | 0x00          | RW  | Bit[0]: PLL1_bypass                                                                                                                                                                                                        |
| 0x0309  | PLL1_CTRL_9   | 0x01          | RW  | Bit[2:0]: PLL1_CP                                                                                                                                                                                                          |
| 0x030A  | PLL1_CTRL_A   | 0x00          | RW  | Bit[0]: PLL1_PREDIVP<br>0: /1<br>1: /2                                                                                                                                                                                     |

table 2-9 PLL2 registers (sheet 1 of 2)

| address | register name | default value | R/W | description                                                                                                                                                                                                                                                                                              |
|---------|---------------|---------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3611  | ASP_CTRL17    | 0x10          | RW  | Bit[7]: PLL2_bypass<br>0: Working<br>1: Bypass<br>Bit[6:4]: PLL2_CP<br>Default 001<br>Bit[3]: PLL2_PREDIVP<br>0: By 1<br>1: By 2<br>Bit[2:0]: PLL2_PREDIV<br>000: 1<br>001: 1.5<br>010: 2<br>011: 2.5<br>100: 3<br>101: 4<br>110: 6<br>111: 8                                                            |
| 0x3612  | ASP_CTRL18    | 0x23          | RW  | Bit[7]: Power down PUMP clock divider<br>0: Working<br>1: Power down<br>Bit[6:4]: PLL2_DIVS<br>System clock divider control bits<br>000: 1<br>001: 1.5<br>010: 2<br>011: 2.5<br>100: 3<br>101: 3.5<br>110: 4<br>111: 5<br>Bit[3:0]: PLL2_DIVSP<br>System clock pre_divider control bit value = [3:0] + 1 |
| 0x3613  | ASP_CTRL19    | 0x33          | RW  | Bit[7:4]: PLL2_DIVSRAM<br>SRAM clock divider control bit Value=[3:0]+1<br>Bit[3:0]: PLL2_DIVDAC<br>DAC clock divider control bit value = [3:0] + 1                                                                                                                                                       |
| 0x3614  | ASP_CTRL20    | 0x28          | RW  | Bit[7:0]: PLL2_DIVP[7:0]<br>Loop divider control value = [9:0]                                                                                                                                                                                                                                           |

table 2-9 PLL2 registers (sheet 2 of 2)

| address | register name | default value | R/W | description                                                                                                                                                                                                |
|---------|---------------|---------------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3615  | ASP_CTRL21    | 0x1C          | RW  | Bit[5:4]: N_PUMP clock div[1:0]<br>Div number<br>00: /2<br>01: /3<br>10: /4<br>11: /8<br>Bit[3:2]: P_PUMP clock div[1:0]<br>Div number<br>00: /2<br>01: /3<br>10: /4<br>11: /8<br>Bit[1:0]: PLL2_DIVP[9:8] |

table 2-10 sample PLL configuration (sheet 1 of 2)

| name            | address     | input clock (EXTCLK) |        |           |       |
|-----------------|-------------|----------------------|--------|-----------|-------|
|                 |             | 24 MHz               | 27 MHz | 13.33 MHz | 6 MHz |
| PLL1_PREDIV     | 0x0300      | 0x00                 | 0x01   | 0x00      | 0x00  |
| PLL1_DIVP_H     | 0x0301      | 0x00                 | 0x00   | 0x00      | 0x00  |
| PLL1_DIVP_L     | 0x0302      | 0x32                 | 0x43   | 0x5A      | 0xC8  |
| PLL1_DIVM       | 0x0303      | 0x00                 | 0x00   | 0x00      | 0x00  |
| PLL1_DIV_MIPI   | 0x0304      | 0x03                 | 0x03   | 0x03      | 0x03  |
| PLL1_PREDIVP    | 0x030A      | 0x00                 | 0x00   | 0x00      | 0x00  |
| PLL2_PREDIVP    | 0x3611[3]   | 0x00                 | 0x00   | 0x00      | 0x00  |
| PLL2_PREDIV     | 0x3611[2:0] | 0x00                 | 0x01   | 0x00      | 0x00  |
| PLL2_DIV_SYS    | 0x3612[6:4] | 0x02                 | 0x02   | 0x02      | 0x02  |
| PLL2_DIV_SYS_SP | 0x3612[3:0] | 0x03                 | 0x03   | 0x03      | 0x03  |
| PLL2_DIV_SRAM   | 0x3613[7:4] | 0x03                 | 0x03   | 0x03      | 0x03  |
| PLL2_DIV_DAC    | 0x3613[3:0] | 0x03                 | 0x03   | 0x03      | 0x03  |
| PLL2_DIVP_L     | 0x3614[7:0] | 0x28                 | 0x36   | 0x48      | 0xA0  |
| PLL2_DIVP_H     | 0x3615[1:0] | 0x00                 | 0x00   | 0x00      | 0x00  |
| HTS high byte   | 0x380C      | 0x12                 | 0x12   | 0x12      | 0x12  |
| HTS low byte    | 0x380D      | 0xC0                 | 0xC0   | 0xC0      | 0xC0  |

table 2-10 sample PLL configuration (sheet 2 of 2)

| name          | address | input clock (EXTCLK) |            |            |          |
|---------------|---------|----------------------|------------|------------|----------|
|               |         | 24 MHz               | 27 MHz     | 13.33 MHz  | 6 MHz    |
| VTS high byte | 0x380E  | 0x0D                 | 0x0D       | 0x0D       | 0x0D     |
| VTS low byte  | 0x380F  | 0x00                 | 0x00       | 0x00       | 0x00     |
| SCLK          |         | 120 MHz              | 121.5 MHz  | 119.97 MHz | 120 MHz  |
| DAC_CLK       |         | 240 MHz              | 243 MHz    | 239.94 MHz | 240 MHz  |
| MIPI_SCLK     |         | 1200 MHz             | 1206 MHz   | 1199.7 MHz | 1200 MHz |
| MIPI_PCLK     |         | 150 MHz              | 150.75 MHz | 149.96 MHz | 150 MHz  |

table 2-11 PLL speed limitation

| parameter              | value        |
|------------------------|--------------|
| PLL1_multiplier input  | 4~27 MHz     |
| PLL1_multiplier output | 500~1200 MHz |
| PLL2_multiplier input  | 4~27 MHz     |
| PLL2_multiplier output | 500~1200 MHz |
| SCLK                   | max 126 MHz  |
| REF_CLK                | 6~64 MHz     |

## 2.10 serial camera control bus (SCCB) interface

The Serial Camera Control Bus (SCCB) interface controls the image sensor operation. Refer to the *OmniVision Technologies Serial Camera Control Bus (SCCB) Specification* for detailed usage of the serial control port.

In the OV13850, the SCCB ID is controlled by the SID pin, and can be programmable. If SID is low, the sensor's SCCB address comes from register 0x300C which has a default value of 0x20. If SID is high, the sensor's SCCB address comes from register 0x3661 which has a default value of 0x6C.

### 2.10.1 data transfer protocol


Data transfer of the OV13850 follows the SCCB protocol.

### 2.10.2 message format

The OV13850 supports the message format shown in **figure 2-10**. The repeated START (Sr) condition is not shown in **figure 2-10**, but is shown in **figure 2-11** and **figure 2-13**.

**figure 2-10** message type

message type: 16-bit sub-address, 8-bit data, and 7-bit slave address

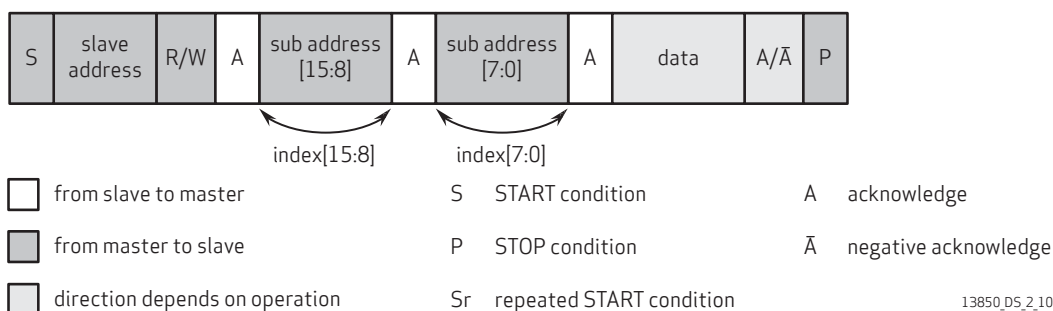

### 2.10.3 read / write operation


The OV13850 supports four different read operations and two different write operations:

- a single read from random locations
- a sequential read from random locations
- a single read from current location
- a sequential read from current location
- single write to random locations
- sequential write starting from random location

The sub-address in the sensor automatically increases by one after each read/write operation.


In a single read from random locations, the master does a dummy write operation to desired sub-address, issues a repeated start condition and then addresses the camera again with a read operation. After acknowledging its slave address, the camera starts to output data onto the SIOD line as shown in **figure 2-11**. The master terminates the read operation by setting a negative acknowledge and stop condition.

**figure 2-11** SCCB single read from random location

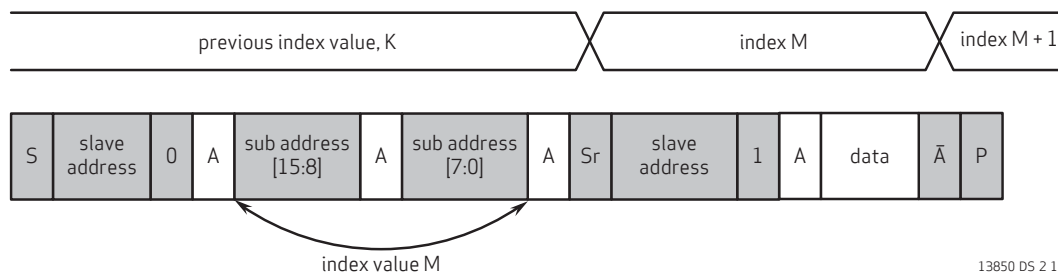


If the host addresses the camera with read operation directly without the dummy write operation, the camera responds by setting the data from last used sub-address to the SIOD line as shown in **figure 2-12**. The master terminates the read operation by setting a negative acknowledge and stop condition.

**figure 2-12** SCCB single read from current location

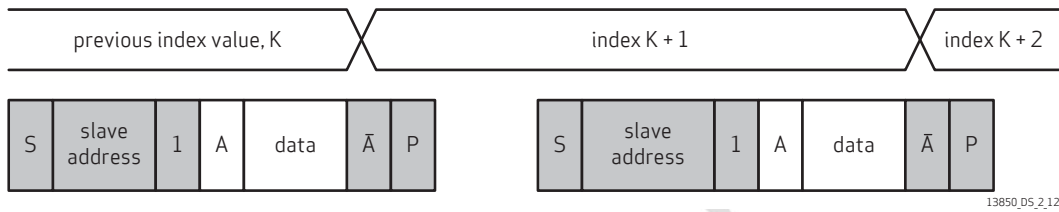


The sequential read from a random location is illustrated in **figure 2-13**. The master does a dummy write to the desired sub-address, issues a repeated start condition after acknowledge from slave and addresses the slave again with read operation. If a master issues an acknowledge after receiving data, it acts as a signal to the slave that the read operation shall continue from the next sub-address. When master has read the last data byte, it issues a negative acknowledge and stop condition.

**figure 2-13** SCCB sequential read from random location

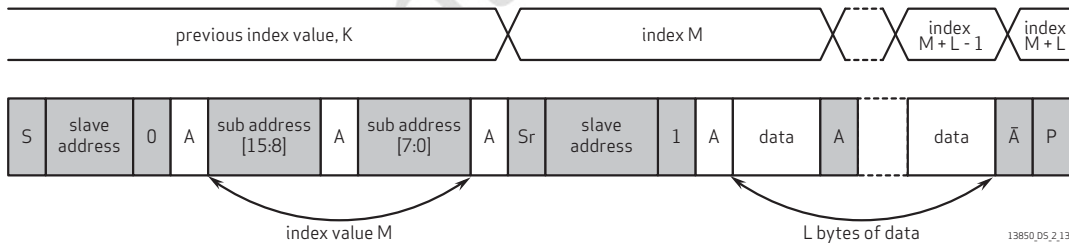


The sequential read from current location is similar to a sequential read from a random location. The only exception is that there is no dummy write operation. as shown in **figure 2-14**. The master terminates the read operation by setting a negative acknowledge and stop condition.

**figure 2-14** SCCB sequential read from current location

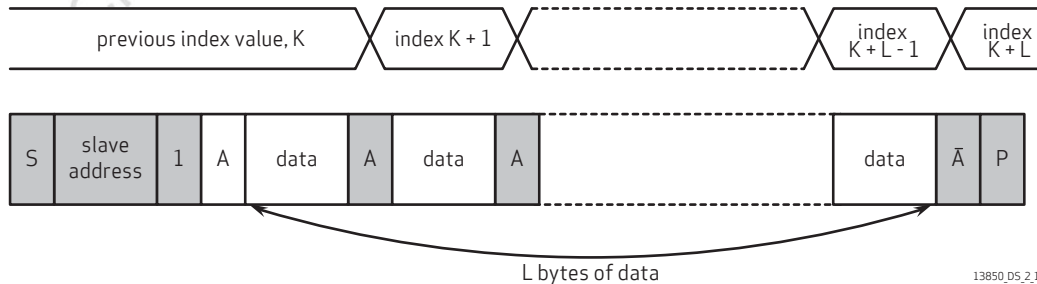


The write operation to a random location is illustrated in **figure 2-15**. The master issues a write operation to the slave, sets the sub-address and data correspondingly after the slave has acknowledged. The write operation is terminated with a stop condition from the master.

**figure 2-15** SCCB single write to random location

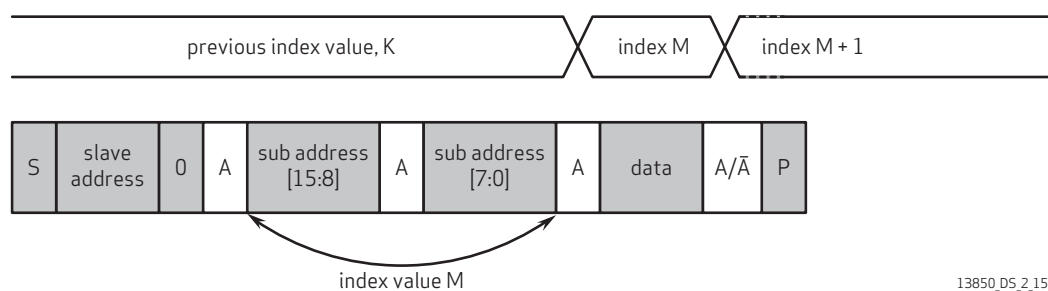


The sequential write is illustrated in **figure 2-16**. The slave automatically increments the sub-address after each data byte. The sequential write operation is terminated with stop condition from the master.

**figure 2-16** SCCB sequential write to random location

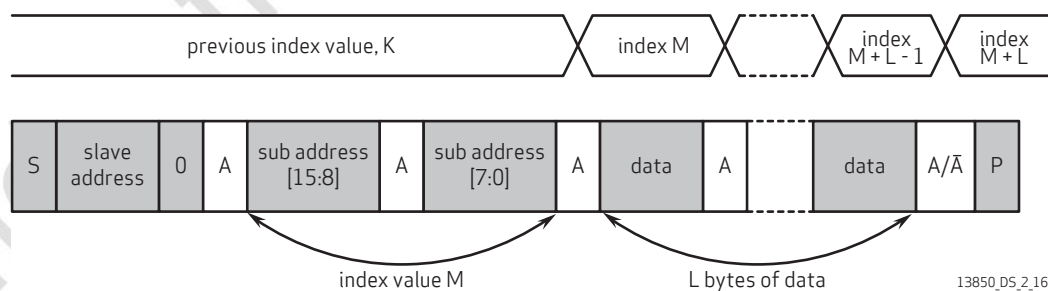

#### 2.10.4 SCCB timing

**figure 2-17** SCCB interface timing

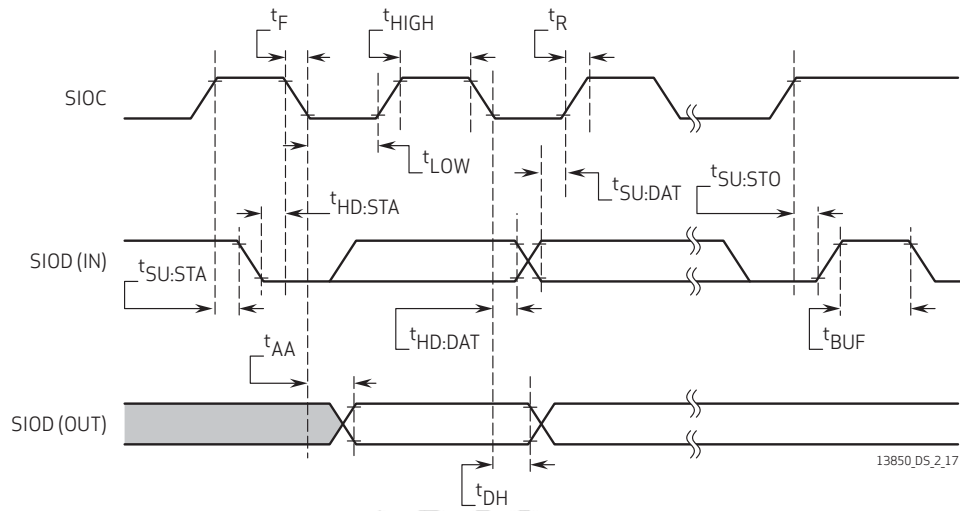

**table 2-12** SCCB interface timing specifications<sup>ab</sup>

| symbol       | parameter                      | min | typ | max | unit    |
|--------------|--------------------------------|-----|-----|-----|---------|
| $f_{SIOC}$   | clock frequency                | TBD | TBD | TBD | kHz     |
| $t_{LOW}$    | clock low period               | TBD | TBD | TBD | $\mu s$ |
| $t_{HIGH}$   | clock high period              | TBD | TBD | TBD | $\mu s$ |
| $t_{AA}$     | SIOC low to data out valid     | TBD | TBD | TBD | $\mu s$ |
| $t_{BUF}$    | bus free time before new start | TBD | TBD | TBD | $\mu s$ |
| $t_{HD:STA}$ | start condition hold time      | TBD | TBD | TBD | $\mu s$ |
| $t_{SU:STA}$ | start condition setup time     | TBD | TBD | TBD | $\mu s$ |
| $t_{HD:DAT}$ | data in hold time              | TBD | TBD | TBD | $\mu s$ |
| $t_{SU:DAT}$ | data in setup time             | TBD | TBD | TBD | $\mu s$ |
| $t_{SU:STO}$ | stop condition setup time      | TBD | TBD | TBD | $\mu s$ |
| $t_R, t_F$   | SCCB rise/fall times           | TBD | TBD | TBD | $\mu s$ |
| $t_{DH}$     | data out hold time             | TBD | TBD | TBD | $\mu s$ |

- SCCB timing is based on 1MHz and 400kHz modes
- timing measurement shown at the beginning of the rising edge and/or of the falling edge signifies 30%, timing measurement shown in the middle of the rising/falling edge signifies 50%, timing measurement shown at the beginning of the rising edge and/or of the falling edge signifies 70%

### 2.10.5 group write

The OV13850 supports four groups. These groups share 1024x8 bits or 1024 bytes and the size of each group is programmable by adjusting the start address.

Group write is supported in order to update a group of registers in the same frame. These registers are guaranteed to be written prior to the internal latch at the frame boundary.

**table 2-13** context switching control

| address | register name  | default value | R/W | description                                                                                                                                                                                                                                                        |
|---------|----------------|---------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3208  | GROUP_ACCESS   | –             | W   | Group Access<br>Bit[7:4]: group_ctrl<br>0000: Group hold start<br>0001: Group hold end<br>0110: Group launch at line blank<br>1010: Group launch at vertical blank<br>1110: Group launch immediately<br>Others: Reserved                                           |
|         |                |               |     | Bit[3:0]: group_id<br>0000: Group bank 0, default start from address 0x00<br>0001: Group bank 1, default start from address 0x40<br>0010: Group bank 2, default start from address 0x80<br>0011: Group bank 3, default start from address 0xB0<br>Others: Reserved |
| 0x3209  | GRP0_PERIOD    | 0x00          | RW  | Number of Frames to Stay in Group 0                                                                                                                                                                                                                                |
| 0x320A  | GRP1_PERIOD    | 0x00          | RW  | Number of Frames to Stay in Group 1                                                                                                                                                                                                                                |
| 0x320B  | GRP_SWCTRL     | 0x01          | RW  | Bit[4]: frame_cnt_trig<br>Bit[3]: group_switch_repeat<br>Bit[2]: context_en<br>Bit[1:0]: Second group selection                                                                                                                                                    |
| 0x320D  | GRP_ACT        | –             | R   | Indicates Which Group is Active                                                                                                                                                                                                                                    |
| 0x320E  | FRAME_CNT_GRP0 | –             | R   | frame_cnt_grp0                                                                                                                                                                                                                                                     |
| 0x320F  | FRAME_CNT_GRP1 | –             | R   | frame_cnt_grp1                                                                                                                                                                                                                                                     |

## 2.11 hold

After the groups are configured, users can perform a hold operation to store register settings into the SRAM of each group. The hold of each group starts and ends with control register 0x3208. The lower 4 bits of register 0x3208 control which group to access, and the upper 4 bits control the start (0x0: hold start) and end (0x1: hold end) of the hold operation.

The example setting below shows the sequence to hold group 0:

```
20 3208 00    group 0 hold start
20 3800 11    first register into group 0
20 3911 22    second register into group 0
20 3208 10    group 0 hold end
```

## 2.12 launch

After the contents of each group are defined in the hold operation, all registers belonging to each group are stored in SRAM and ready to be written into target registers (i.e., the launch of that group).

There are five launch modes as described in [section 2.12.1](#) to [section 2.12.5](#).

### 2.12.1 launch mode 1 - quick manual launch

Manual launch is enabled by setting register 0x320B to 0.

Quick manual launch is achieved by writing to control register 0x3208. The value written into this register is 0xEX, the upper 4 bits (0xE) are the quick launch command and the lower 4 bits (0xX) are the group number. For example, if users want to launch group 0, they just write the value 0xE0 to register 0x3208, then the contents of group 0 will be written to the target registers immediately after the sensor gets this command through the SCCB. Below is an example of this setting.

```
20 320B 00    manual launch on
20 3208 E0    quick launch group 0
```

### 2.12.2 launch mode 2 - delay manual launch

Delay manual launch is achieved by writing to register 0x3208. The value written into this register is 0xAX, where the upper 4 bits (0xA) are the delay launch command and the lower 4 bits (0xX) are the group number. For example, if users want to launch group 1, they just write the value 0xA1 to register 0x3208, then the contents of group 1 will be written to the target registers. The difference with mode 1 is that the writing will wait for some internally defined time spot in vertical blanking; thus delayed. Below is an example of this setting.

```
20 320B 00    manual launch on
20 3208 A1    delay launch group 1
```

### 2.12.3 launch mode 3 - quick auto launch

Quick auto launch works like the mode 1, but the difference is it will return to a specified group automatically. This is controlled by the register 0x3209, where bit[6:5] controls which group to return and bit[4:0] controls how many frames to stay before returning. The auto launch enable bit is the 0x320B[7]. The operation can be better understood with an example of this setting:

```
20 3209 44 Bit[6:5]: 2, return to group 2, Bit[4:0]: 4: stay 4 frames
20 320B 80 auto launch on
20 3208 E0 quick launch group 0
```

In this example, the sensor will quick launch group 0, stay at group 0 for 4 frames, and then return to group 2.

### 2.12.4 launch mode 4: delay auto launch

Delay auto launch works like mode 2 in the delay launch part and like the mode 3 in the return part.

The operation can be better understood with an example of this setting:

```
20 3209 44 Bit[6:5]: 2, return to group 2, Bit[4:0]: 4: stay 4 frames
20 320B 80 auto launch on
20 3208 A0 delay launch group 0
```

In this example, the sensor will delay launch group 0, stay at group 0 for 4 frames, and then return to group 2.

### 2.12.5 launch mode 5: repeat launch

Repeat launch is controlled by registers 0x3209, 0x320A, and 0x320B. In this mode, the launch is repeated automatically between the first group (must be group 0) and the second group (can be either one of groups 1-3, which is specified by register 0x320B[1:0]). Register 0x3209 defines how many frames remain in group 0 and register 0x320A defines how many frames remain in the second group.

The operation can be better understood with an example of this setting:

```
20 3209 02 Bit[7:0]: 2, stay 2 frames in group 0
20 320A 03 Bit[7]: 3, stay 3 frames in the second group
20 320B 0E Bit[3:2]: 3, repeat launch on, Bit[1:0]: 2, second group select:
group 2
20 3208 A0 always use a0 for repeat launch
```

In this example, the sensor will delay launch group 0, stay at group 0 for 2 frames, then switch to group 2 for 3 frames, then back to group 0 for 2 frames, group 2 for 3 frames and so on.

Below is another example that shows applying launch mode 2 (delay manual launch) first, the sensor stays at group 2 for an indefinite number of frames, and then applying launch mode 5 (repeat launch). The sensor will switch to group 0 for 2 frames, then group 2 for 3 frames, and so on.

```
20 320B 00    manual launch on
20 3208 A2    delay launch group 2 stay at group 2 for indefinite frames
20 3209 02    Bit[7:0]: 2, stay 2 frames in group 0
20 320A 03    Bit[7:0]: 3, stay 3 frames in the second group
20 320B 0E    Bit3:2]: 3, repeat launch on, Bit[1:0]: 2, second group select:
              group 2
20 3208 A0    always use A0 for repeat launch
```

Switch to group 0 for 2 frames, then group 2 for 3 frames, and so on.

**OV13850**

color CMOS 13.2 megapixel (4224 x 3136) image sensor with OmniBSI-3™ technology

Confidential for  
CMK

### 3 block level description


### 3.1 pixel array structure

The OV13850 sensor has an image array of 4256 columns by 3152 rows (13,414,912 pixels). **figure 3-1** shows a cross-section of the image sensor array.

The color filters are arranged in a Bayer pattern. The primary color BG/GR array is arranged in line-alternating fashion. Of the 13,414,912 pixels, 13,246,464 (4224x3136) are active pixels and can be output.

The sensor array design is based on a field integration readout system with line-by-line transfer and an electronic shutter with a synchronous pixel readout scheme.

**figure 3-1** sensor array region color filter layout

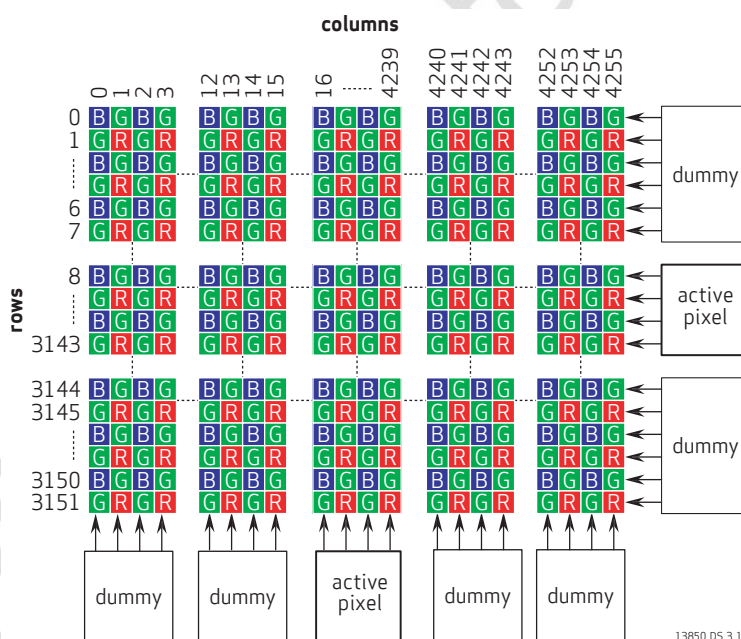

3.2 subsampling

Binning mode is usually used for low resolution. When the binning function is ON, voltage levels of adjacent pixels are averaged. If the binning function is OFF, the pixels, which are not output, are merely skipped. The OV13850 supports 2x2 binning. In **figure 3-2**, the voltage levels of two horizontal (2x1) adjacent same-color pixels are averaged before entering the ADC.

figure 3-2 example of 2x2 binning

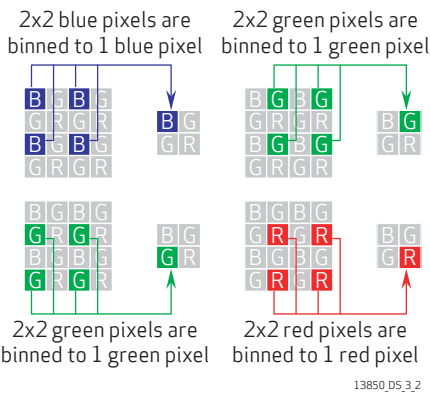


table 3-1 binning-related registers

| address | register name  | default value | R/W | description |                    |
|---------|----------------|---------------|-----|-------------|--------------------|
| 0x3820  | TIMING_FORMAT1 | 0x00          | RW  | Bit[0]:     | Vertical binning   |
| 0x3821  | TIMING_FORMAT2 | 0x00          | RW  | Bit[0]:     | Horizontal binning |

3.3 alternate row HDR

In HDR mode, the exposure is still controlled by a rolling shutter. However, the frame data is separated into "long exposure" and "short exposure" in every two rows, as shown in **figure 3-3**. Long exposure time is controlled by registers 0x3500, 0x3501, and 0x3502. Short exposure time is controlled by registers 0x3506, 0x3507, and 0x3508. The sequence of MIPI output in HDR mode is similar to normal mode. The output timing of long and short exposure lines is shown in **figure 3-4**

figure 3-3 alternate row HDR




figure 3-4 HDR output timing

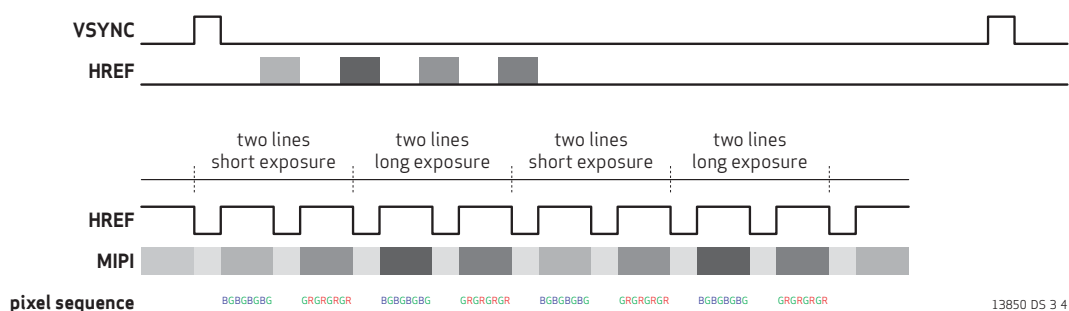


table 3-2 HDR control registers

| address | register name  | default value | R/W | description                                                                                                                    |
|---------|----------------|---------------|-----|--------------------------------------------------------------------------------------------------------------------------------|
| 0x3821  | TIMING_FORMAT2 | 0x08          | RW  | HDR Enable<br>Bit[7]: hdr_en<br>0: Disable<br>1: Enable                                                                        |
| 0x3500  | MEC LONG EXPO  | 0x00          | RW  | Long Exposure<br>Bit[7:4]: Not used<br>Bit[3:0]: Long exposure[19:16]                                                          |
| 0x3501  | MEC LONG EXPO  | 0x02          | RW  | Long Exposure<br>Bit[7:0]: Long exposure[15:8]                                                                                 |
| 0x3502  | MEC LONG EXPO  | 0x00          | RW  | Long Exposure<br>Bit[7:0]: Long exposure[7:0]<br>Low 4 bits are fraction bits which are not supported and should always be 0   |
| 0x3506  | MEC SHORT EXPO | 0x00          | RW  | Short Exposure<br>Bit[7:4]: Not used<br>Bit[3:0]: Short exposure[19:16]                                                        |
| 0x3507  | MEC SHORT EXPO | 0x02          | RW  | Short Exposure<br>Bit[7:0]: Short exposure[15:8]                                                                               |
| 0x3508  | MEC SHORT EXPO | 0x00          | RW  | Short Exposure<br>Bit[7:0]: Short exposure[7:0]<br>Low 4 bits are fraction bits which are not supported and should always be 0 |

**OV13850**

color CMOS 13.2 megapixel (4224 x 3136) image sensor with OmniBSI-3™ technology

Confidential for  
CMK

## 4 image sensor core digital functions

### 4.1 mirror and flip

The OV13850 provides mirror and flip readout modes, which respectively reverse the sensor data readout order horizontally and vertically (see [figure 4-1](#)).

**figure 4-1** mirror and flip samples



13850\_DS\_4.1


**table 4-1** mirror and flip registers

| address | register name | default value | R/W | description                                                                                      |
|---------|---------------|---------------|-----|--------------------------------------------------------------------------------------------------|
| 0x3820  | TIMING_REG20  | 0x00          | RW  | Timing Control Register<br>Bit[2]: Vertical flip enable<br>0: Normal<br>1: Vertical flip         |
| 0x3821  | TIMING_REG21  | 0x00          | RW  | Timing Control Register<br>Bit[2]: Horizontal mirror enable<br>0: Normal<br>1: Horizontal mirror |

## 4.2 image cropping and windowing

An image windowing area is defined by four parameters, horizontal start (HS), horizontal end (HE), vertical start (VS), and vertical end (VE). By properly setting the parameters, any portion within the sensor array can be output as a visible area. Windowing is achieved by simply masking off the pixels outside the window; thus, the timing is not affected.

**figure 4-2** image cropping and windowing

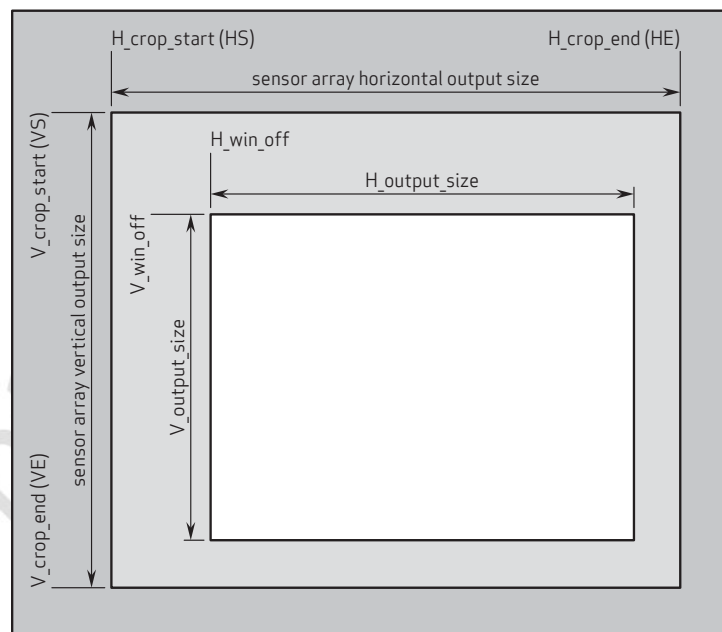

13850\_DS\_4.2

**table 4-2** image cropping and windowing control functions (sheet 1 of 2)

| address | register name | default value | R/W | description                                   |
|---------|---------------|---------------|-----|-----------------------------------------------|
| 0x3800  | H_CROP_START  | 0x00          | RW  | Bit[4:0]: Horizontal crop start address[12:8] |
| 0x3801  | H_CROP_START  | 0x14          | RW  | Bit[7:0]: Horizontal crop start address[7:0]  |
| 0x3802  | V_CROP_START  | 0x00          | RW  | Bit[3:0]: Vertical crop start address[11:8]   |
| 0x3803  | V_CROP_START  | 0x0C          | RW  | Bit[7:0]: Vertical crop start address[7:0]    |
| 0x3804  | H_CROP_END    | 0x10          | RW  | Bit[4:0]: Horizontal crop end address[12:8]   |
| 0x3805  | H_CROP_END    | 0x8B          | RW  | Bit[7:0]: Horizontal crop end address[7:0]    |
| 0x3806  | V_CROP_END    | 0x0C          | RW  | Bit[3:0]: Vertical crop end address[11:8]     |

table 4-2 image cropping and windowing control functions (sheet 2 of 2)

| address | register name | default value | R/W | description                                                                                                 |
|---------|---------------|---------------|-----|-------------------------------------------------------------------------------------------------------------|
| 0x3807  | V_CROP_END    | 0x43          | RW  | Bit[7:0]: Vertical crop end address[7:0]                                                                    |
| 0x3808  | H_OUTPUT_SIZE | 0x10          | RW  | Bit[4:0]: Horizontal output size[12:8]                                                                      |
| 0x3809  | H_OUTPUT_SIZE | 0x70          | RW  | Bit[7:0]: Horizontal output size[7:0]                                                                       |
| 0x380A  | V_OUTPUT_SIZE | 0x0C          | RW  | Bit[3:0]: Vertical output size[11:8]                                                                        |
| 0x380B  | V_OUTPUT_SIZE | 0x30          | RW  | Bit[7:0]: Vertical output size[7:0]                                                                         |
| 0x380C  | TIMING_HTS    | 0x12          | RW  | Bit[6:0]: Horizontal total size[14:8]                                                                       |
| 0x380D  | TIMING_HTS    | 0xC0          | RW  | Bit[7:0]: Horizontal total size[7:0]                                                                        |
| 0x380E  | TIMING_VTS    | 0x0D          | RW  | Bit[6:0]: Vertical total size[14:8]                                                                         |
| 0x380F  | TIMING_VTS    | 0x00          | RW  | Bit[7:0]: Vertical total size[7:0]                                                                          |
| 0x3810  | H_WIN_OFF     | 0x00          | RW  | Bit[3:0]: Horizontal windowing offset[11:8]                                                                 |
| 0x3811  | H_WIN_OFF     | 0x04          | RW  | Bit[7:0]: Horizontal windowing offset[7:0]                                                                  |
| 0x3812  | V_WIN_OFF     | 0x00          | RW  | Bit[3:0]: Vertical windowing offset[11:8]                                                                   |
| 0x3813  | V_WIN_OFF     | 0x04          | RW  | Bit[7:0]: Vertical windowing offset[7:0]                                                                    |
| 0x3814  | H_INC         | 0x11          | RW  | Bit[7:4]: Horizontal sub-sample odd increase number<br>Bit[3:0]: Horizontal sub-sample even increase number |
| 0x3815  | V_INC         | 0x11          | RW  | Bit[7:4]: Vertical sub-sample odd increase number<br>Bit[3:0]: Vertical sub-sample even increase number     |


## 4.3 test pattern

For testing purposes, there are four types of test patterns. The two types of digital test patterns are color bar and random data. The OV13850 also offers two digital effects: transparent effect and rolling bar effect. The output type of digital test pattern is controlled by the test\_pattern\_type register (0x5E00[3:2]). The digital test pattern function is controlled by register 0x5E00[7].

### 4.3.1 color bar

There are four types of color bars which are switched by bar-style in register 0x5E00[3:2] (see **figure 4-3**).

**figure 4-3** color bar types

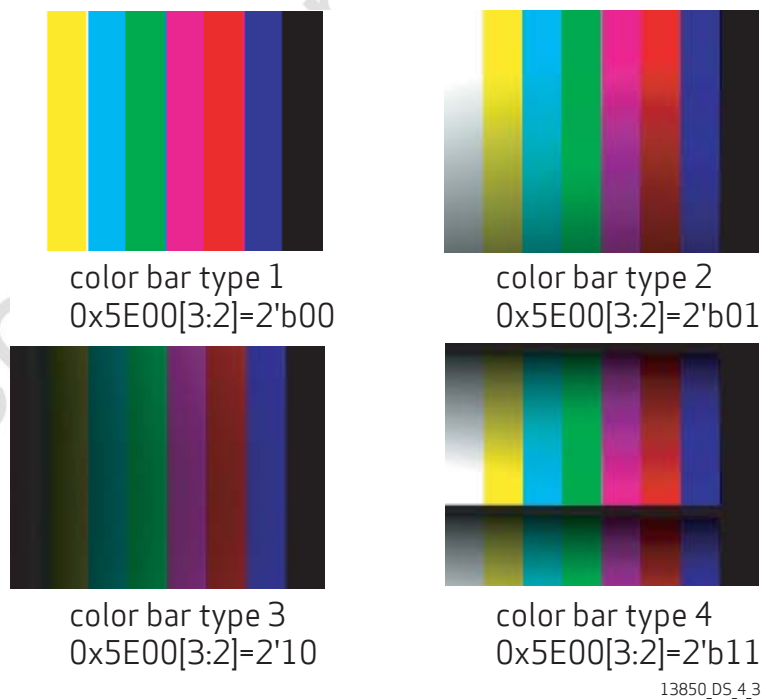

### 4.3.2 random data

There are two types of random data test patterns: frame-changing and frame-fixed random data.

### 4.3.3 transparent effect

The transparent effect is enabled by transparent\_en register (0x5E00[5]). If this register is set, the transparent test pattern will be displayed. **figure 4-4** is an example showing a transparent color bar image.


**figure 4-4** transparent effect



#### 4.3.4 rolling bar effect

The rolling bar is set by rolling\_bar\_en register (0x5E00[6]). If it is set, an inverted color rolling bar will roll from top to bottom. **figure 4-5** is an example showing a rolling bar on a color bar image.

**figure 4-5** rolling bar effect



## 4.4 black level calibration (BLC)

The pixel array contains several optically shielded (black) lines. These lines are used as reference for black level calibration.

There are two main functions of the BLC:

- applying all normal pixel values based on the values of the black levels
- applying multiplication to all the pixel values based on digital gain

**table 4-3** BLC control registers (sheet 1 of 3)

| address | register name | default value | R/W | description |        |
|---------|---------------|---------------|-----|-------------|--------|
| 0x5001  | R ISP CTRL1   | 0x01          | RW  | Bit[0]:     | BLC_en |

table 4-3 BLC control registers (sheet 2 of 3)

| address | register name | default value | R/W | description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------|---------------|---------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x4000  | BLC CTRL00    | 0xF1          | RW  | Bit[7]: outrange_trig_en<br>Offset out of range trigger function enable signal<br>0: Disable<br>1: Enable<br>Bit[6]: format_chg_en<br>Format change trigger function enable signal<br>0: Disable<br>1: Enable<br>Bit[5]: gain_chg_en<br>Gain change trigger function enable signal<br>0: Disable<br>1: Enable<br>Bit[4]: Not used<br>Bit[3]: manual_trig<br>Manual trigger signal<br>Its rising edge will trigger BLC<br>Bit[2]: freeze_en<br>BLC freeze function enable signal<br>When it is set, the BLC will be frozen. Offsets will keep the their pre-frame values.<br>Bit[1]: always_do<br>BLC always trigger signal<br>When it is set, the BLC will be triggered every frame unless the freeze_en is enabled.<br>Bit[0]: median_en<br>5-point median filter function enable signal<br>0: Disable<br>1: Enable |
| 0x4001  | BLC CTRL01    | 0x00          | RW  | Bit[1]: blc_cut_range_en<br>Bit[0]: remove_row_offset_en<br>Column delta offset remove function enable signal<br>0: Used offset does not include column delta offset<br>1: Used offset includes column delta offset                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 0x4004  | TARGET        | 0x00          | RW  | Bit[7:0]: Target[15:8]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 0x4005  | TARGET        | 0x10          | RW  | Bit[7:0]: Target[7:0]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 0x4006  | BLC CTRL 06   | 0x1F          | RW  | Bit[7:0]: format_trig_framenumber                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 0x4007  | BLC CTRL 07   | 0x1F          | RW  | Bit[7:0]: reset_trig_framenumber                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

table 4-3 BLC control registers (sheet 3 of 3)

| address | register name      | default value | R/W | description                        |
|---------|--------------------|---------------|-----|------------------------------------|
| 0x4008  | BLC_CTRL_08        | 0x01          | RW  | Bit[7:0]: manual_trig_framenumber  |
| 0x400C  | OFFSET_TRIG_THRESH | 0x00          | RW  | Bit[7:0]: offset_trig_thresh[15:8] |
| 0x400D  | OFFSET_TRIG_THRESH | 0x20          | RW  | Bit[7:0]: offset_trig_thresh[7:0]  |

## 4.5 one time programmable (OTP) memory

The OV13850 supports a maximum of 1024 bytes of one-time programmable (OTP) memory to store chip identification and manufacturing information, which can be used to update the sensor's default setting and can be controlled through the SCCB (see table 4-4).

### 4.5.1 OTP other functions

OTP loading data can be triggered when power up or writing 0x01 to register 0x3D81. Power up loading data is controlled by register 0x3D85[2], and by default is off. Auto mode and manual mode can be chosen by setting register 0x3D84[6] to 0 and 1, respectively, and by default, it is in auto mode. In auto mode, all data in the OTP will be loaded to the OTP buffer, while in manual mode, part of the data, which is defined by the start address ({0x3D88, 0x3D89}) and the end address ({0x3D8A, 0x3D8B}) of the OTP, will be loaded to the OTP buffer.

The OTP memory access conditions are based on typical conditions: sensor wakeup, 2.8~3.0V AVDD, 1.2V DVDD, and 120 MHz system clock.

OTP access requires special timing. In order for OTP access to work with default settings, SCLK should be between 68~126 MHz.

To use OTP memory under different operating conditions, please contact your local OmniVision FAE.

table 4-4 OTP control registers (sheet 1 of 2)

| address       | register name    | default value | R/W | description                                       |
|---------------|------------------|---------------|-----|---------------------------------------------------|
| 0x7000~0x73FF | OTP_SRAM         | 0x00          | RW  | Bit[7:0]: OTP buffer                              |
| 0x3D80        | OTP_PROGRAM_CTRL | 0x00          | RW  | Bit[7]: OTP_wr_busy<br>Bit[0]: OTP_program_enable |
| 0x3D81        | OTP_LOAD_CTRL    | 0x00          | RW  | Bit[7]: OTP_rd_busy<br>Bit[0]: OTP_load_enable    |

table 4-4 OTP control registers (sheet 2 of 2)

| address | register name           | default value | R/W | description                                                                                                                         |
|---------|-------------------------|---------------|-----|-------------------------------------------------------------------------------------------------------------------------------------|
| 0x3D84  | OTP_MODE_CTRL           | 0x00          | RW  | Bit[7]: Program disable<br>1: Disable<br>Bit[6]: Mode select<br>0: Auto mode<br>1: Manual mode                                      |
| 0x3D85  | OTP_REG85               | 0x13          | RW  | Bit[2]: OTP power up load data enable<br>Bit[1]: OTP power up load setting enable<br>Bit[0]: OTP write register load setting enable |
| 0x3D88  | OTP_START_ADDRESS       | 0x00          | RW  | OTP Start High Address for Manual Mode                                                                                              |
| 0x3D89  | OTP_START_ADDRESS       | 0x00          | RW  | OTP Start Low Address for Manual Mode                                                                                               |
| 0x3D8A  | OTP_END_ADDRESS         | 0x00          | RW  | OTP End High Address For Manual Mode                                                                                                |
| 0x3D8B  | OTP_END_ADDRESS         | 0x00          | RW  | OTP End Low Address For Manual Mode                                                                                                 |
| 0x3D8C  | OTP_SETTING_STT_ADDRESS | 0x00          | RW  | OTP Start High Address For Load Setting                                                                                             |
| 0x3D8D  | OTP_SETTING_STT_ADDRESS | 0x00          | RW  | OTP Start Low Address For Load Setting                                                                                              |

## 4.6 temperature sensor

The OV13850 supports an on-chip temperature sensor that covers -64 ~ +192°C with an average range of 5°C. It can be controlled through the SCCB interface (see table 4-5).

Before reading the temperature, the temperature sensor should be triggered by a 0 to 1 transition of register 0x4D12[0]. There is a 64°C offset in the readout value. The junction temperature can be calculated by converting the readout value from hex to decimal and subtracting 64.

table 4-5 temperature sensor functions

| function    | register | R/W | description                        |
|-------------|----------|-----|------------------------------------|
| TPM trigger | 0x4D12   | RW  | Bit[0]: Temperature sensor trigger |
| TPM read    | 0x4D13   | R   | Bit[7:0]: Temperature readout      |

## 4.7 strobe flash

### 4.7.1 strobe flash control

The strobe signal is programmable. It supports both LED and Xenon modes. The polarity of the pulse can be changed. The strobe signal is enabled (turned high/low depending on the pulse's polarity) by requesting the signal via the SCCB interface. Flash modules are triggered by the rising edge by default or by the falling edge if the signal polarity is changed. The OV13850 supports the following flashlight modes (see [table 4-6](#)).


**table 4-6** flashlight modes

| mode  | output     | additional exposure lines |
|-------|------------|---------------------------|
| xenon | one-pulse  | yes                       |
| LED 1 | one-pulse  | yes                       |
| LED 2 | continuous | yes                       |
| LED3  | continuous | no                        |
| LED4  | one-pulse  | yes                       |

#### 4.7.1.1 xenon flash control

After a strobe request is submitted, the strobe pulse will be activated at the beginning of the third frame (see [figure 4-6](#)). The third frame will be correctly exposed. The pulse width can be changed in Xenon mode between 1H and 4H, where H is one row period.


**figure 4-6** xenon flash mode

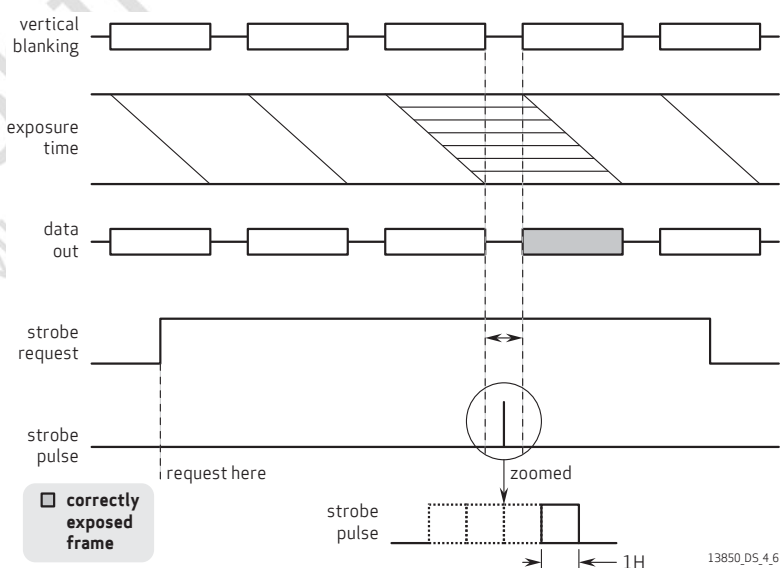

## 4.7.1.2 LED 1 &amp; 2 mode

In LED 1 & 2 modes, the strobe pulse is active two frames after the strobe request is submitted and the third frame is correctly exposed. The strobe pulse will be activated only one time if the strobe end request is set as shown in **figure 4-7**. If end request has not been sent, the strobe signal is activated intermittently until the strobe end request is set (see **figure 4-8**). The strobe width is programmable.

**figure 4-7** LED 1 & 2 mode - one pulse output

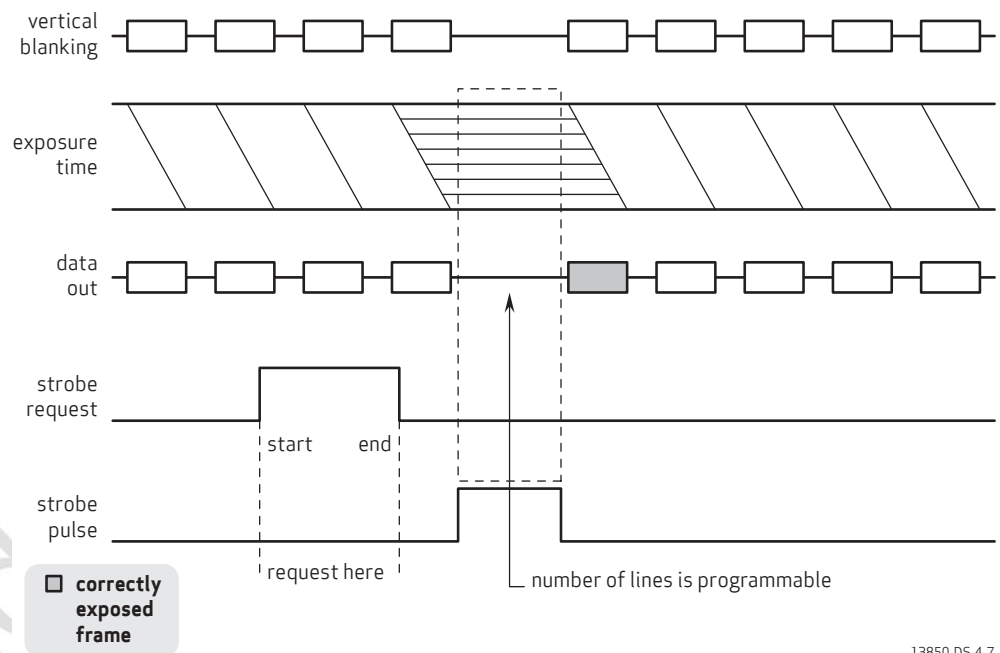


13850\_DS\_4.7

The strobe width is controlled by registers 0x3B02 and 0x3B03. The inserted dummy lines are used for the additional exposure lines added to 0x3500~0x3503. The maximum line of 0x3B02 and 0x3B03 is calculated by  $0x7FFF0 - (0x3500, 0x3501, 0x3502)$ .

Example of LED 1 & 2 mode:

```
20 3b00 01 ;Select led 1 mode
20 3b02 00 ;Set strobe width
20 3b03 3f ;Set strobe width
20 3002 80 ;Set the Vsync output enable
20 3b00 81 ;Request on
;delay 100 ;if using LED 2 mode
20 3b00 00 ;Request off
```


figure 4-8 LED 1 & 2 mode - multiple pulse output

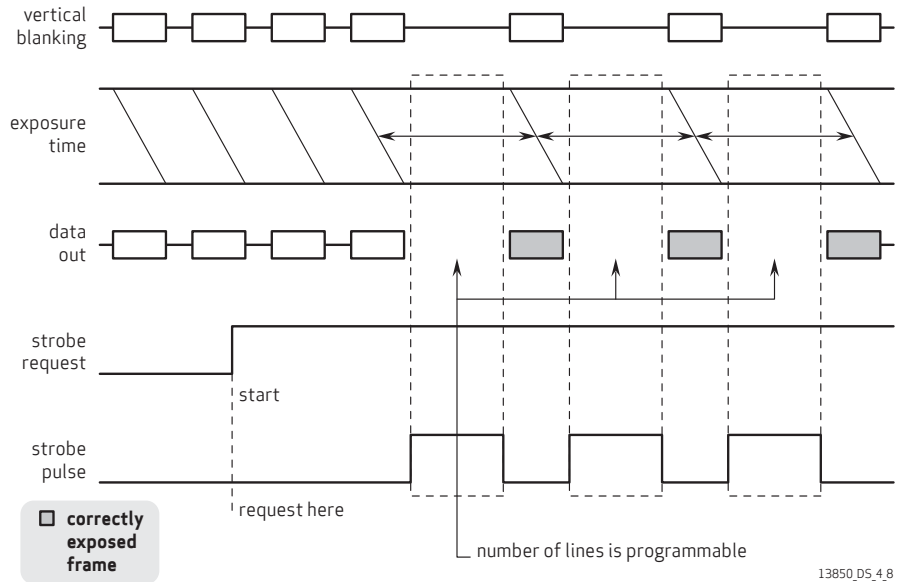

#### 4.7.1.3 LED 3 mode

In LED 3 mode, the strobe signal stays active until the strobe end request is sent (see figure 4-9).


figure 4-9 LED 3 mode

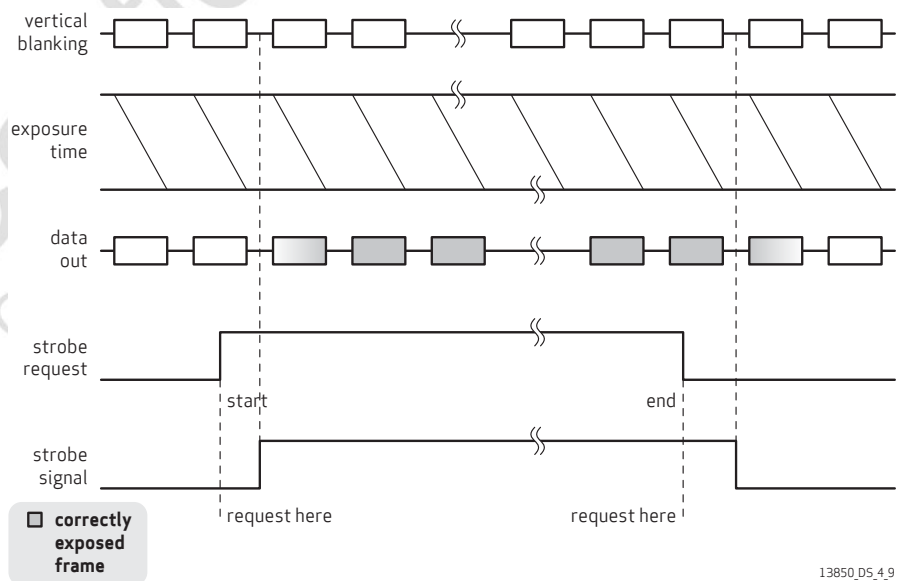

## 4.7.1.4 LED 4 mode

In LED 4 mode, the strobe signal width is controlled by register 0x3B05 (see [figure 4-10](#)). Strobe width =  $128 \times (2^{0x3B05[1:0]} \times (0x3B05[7:2] + 1) \times \text{sclk\_period}$ . The maximum value of 0x3B05[7:2] is 6'b111110.

figure 4-10 LED 4 mode

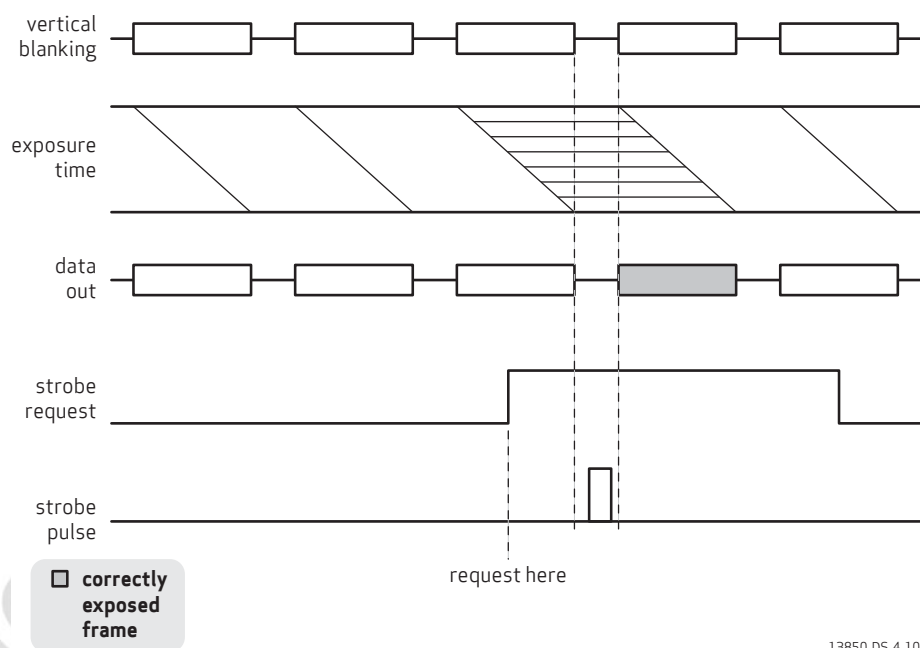

13850\_DS\_4\_10

table 4-7 LED strobe control registers (sheet 1 of 2)

| address | register name | default value | R/W | description                                                                                                                                                                                                                          |
|---------|---------------|---------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3B00  | STROBE CTRL00 | 0x00          | RW  | Bit[7]: Strobe request ON/OFF<br>Bit[6]: Strobe polarity<br>0: Active high<br>1: Active low<br>Bit[5:4]: Pulse width in xenon mode<br>Bit[2:0]: Strobe mode select<br>000: Xenon<br>001: LED1<br>010: LED2<br>011: LED3<br>100: LED4 |
| 0x3B02  | STROBE DMY H  | 0x00          | RW  | Dummy Lines Added in Strobe Mode, MSB                                                                                                                                                                                                |
| 0x3B03  | STROBE DMY L  | 0x00          | RW  | Dummy Lines Added in Strobe Mode, LSB                                                                                                                                                                                                |

table 4-7 LED strobe control registers (sheet 2 of 2)


| address | register name | default value | R/W | description                                                                                                                                                                                                                                    |
|---------|---------------|---------------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3B04  | STROBE CTRL01 | 0x00          | RW  | Bit[3]: start_point_sel<br>Bit[2]: Strobe repeat enable<br>Bit[1:0]: Strobe latency<br>00: Strobe generated at next frame<br>01: Strobe generated 2 frames later<br>10: Strobe generated 3 frames later<br>11: Strobe generated 4 frames later |
| 0x3B05  | STROBE CTRL02 | 0x00          | RW  | Bit[7:2]: Strobe pulse width step<br>Bit[1:0]: Strobe pulse width gain<br>Strobe_pulse_width = $128 \times (2^{\text{gain}}) \times (\text{step} + 1) \times \text{Tsclock}$                                                                   |

## 4.8 3D application capability

In a 3D camera application, controlling two sensors' rolling shutters with identical timing is important, especially when using an LED or flash during image capture. The OV13850 supports 3D camera applications as shown in the block diagram of **figure 4-11**. A hardware pin (SID) is configured for two different SCCB device addresses. The FSIN pin is used to synchronize the VSYNC signal from the other sensor.

Register 0x3823 = 0x30 to set slave into VSYNC mode. Registers 0x3826 and 0x3827 control slave sensor row reset timing and match master sensor. Registers 0x3824 and 0x3825 control column reset timing. The sensor must have a fixed 0x3824~0x3827 values to match the VSYNC from the other sensor in each video format (size, frame rate, exposure...).

figure 4-11 block diagram of 3D applications

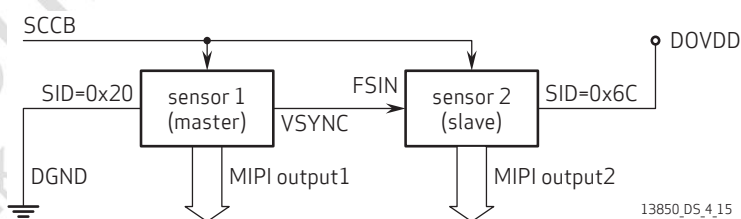

**table 4-8** vertical signal synchronize control registers

| address | register name | default value | R/W | description                                                                                                                              |
|---------|---------------|---------------|-----|------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3823  | REG23         | 0x00          | RW  | Bit[7]: fmt_chg_min_dly WO<br>Bit[6]: ext_vs_re<br>Bit[5]: ext_vs_en<br>Bit[4]: r_init_man<br>Bit[3]: vts_no_latch<br>Bit[2:0]: ablc_adj |
| 0x3824  | CS_RST_FSIN   | 0x00          | RW  | Bit[7:0]: cs reset value at vs_ext[15:8]                                                                                                 |
| 0x3825  | CS_RST_FSIN   | 0x00          | RW  | Bit[7:0]: cs reset value at vs_ext[7:0]                                                                                                  |
| 0x3826  | R_RST_FSIN    | 0x00          | RW  | Bit[7:0]: r reset value at vs_ext[15:8]                                                                                                  |
| 0x3827  | R_RST_FSIN    | 0x00          | RW  | Bit[7:0]: r reset value at vs_ext[7:0]                                                                                                   |

## 5 image sensor processor digital functions

### 5.1 ISP general controls

The ISP module provides several controls including lens correction, and defect pixel cancellation.

**table 5-1**      ISP general control registers

| address | register name | default value | R/W | description                                                                                                                                                                                               |
|---------|---------------|---------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x5000  | R ISP CTRL0   | 0x08          | RW  | Bit[3]: Windowing enable<br>Bit[2]: Black defect pixel cancellation enable<br>0: Disable<br>1: Enable<br>Bit[1]: White defect pixel cancellation enable<br>0: Disable<br>1: Enable<br>Bit[0]: LENC enable |
| 0x5001  | R ISP CTRL1   | 0x01          | RW  | Bit[3]: Digital gain enable<br>Bit[1]: MWB enable<br>Bit[0]: BLC enable                                                                                                                                   |
| 0x5005  | R ISP CTRL5   | 0x1C          | RW  | Bit[4]: MWB bias ON<br>This will subtract the BLC target before MWB gain and add the target back after MWB<br>0: Disable<br>1: Enable                                                                     |

### 5.2 LENC

The lens correction (LENC) algorithm compensates for the illumination drop off in the corners due to the lens. Based on the radius of each pixel, the algorithm calculates a gain for each pixel and then corrects each pixel with the calculated gain to compensate for the light distribution due to the lens curvature. Additionally, LENC supports subsampling in both the horizontal and vertical directions. LENC is performed in the RGB domain.

Luminance channel consists of 36 control points while each color channel consists of 25 control points.

figure 5-1 control points of luminance and color channels

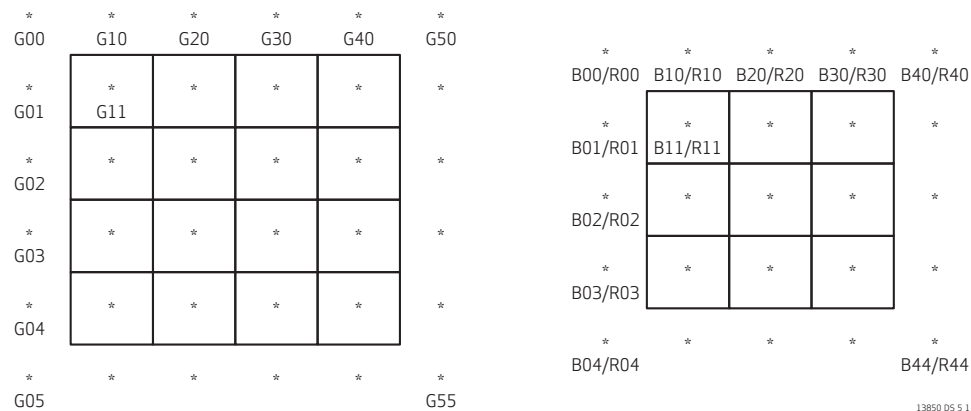


figure 5-2 luminance compensation level calculation

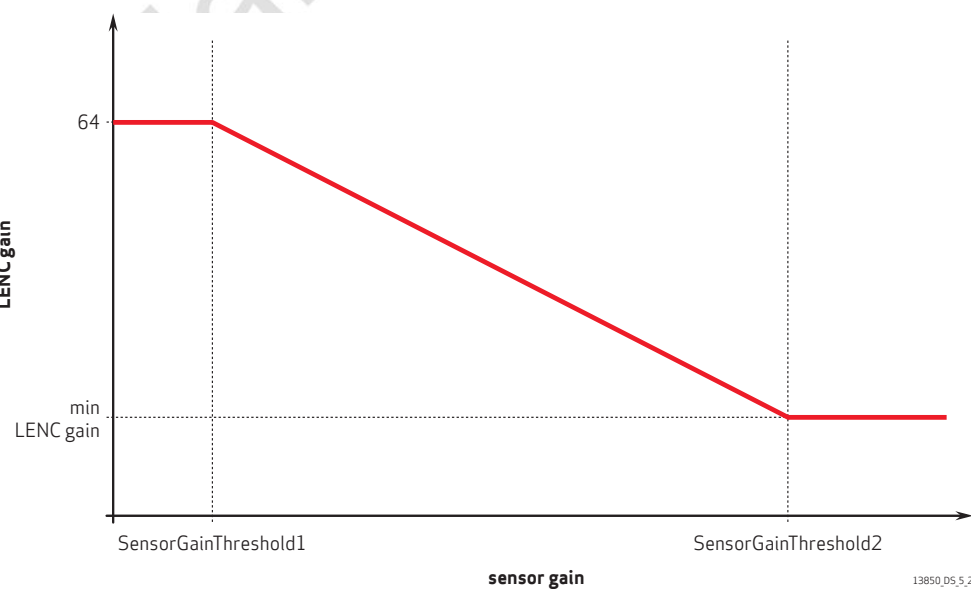


table 5-2 LENC registers (sheet 1 of 6)

| address | register name | default value | R/W | description                                            |
|---------|---------------|---------------|-----|--------------------------------------------------------|
| 0x5000  | R ISP CTRL0   | 0x08          | RW  | Bit[0]: LENC enable                                    |
| 0x5200  | LENC G00      | 0x10          | RW  | Bit[7:0]: Control point G00 for luminance compensation |
| 0x5201  | LENC G01      | 0x10          | RW  | Bit[7:0]: Control point G01 for luminance compensation |
| 0x5202  | LENC G02      | 0x10          | RW  | Bit[7:0]: Control point G02 for luminance compensation |
| 0x5203  | LENC G03      | 0x10          | RW  | Bit[7:0]: Control point G03 for luminance compensation |
| 0x5204  | LENC G04      | 0x10          | RW  | Bit[7:0]: Control point G04 for luminance compensation |
| 0x5205  | LENC G05      | 0x10          | RW  | Bit[7:0]: Control point G05 for luminance compensation |
| 0x5206  | LENC G10      | 0x10          | RW  | Bit[7:0]: Control point G10 for luminance compensation |
| 0x5207  | LENC G11      | 0x08          | RW  | Bit[7:0]: Control point G11 for luminance compensation |
| 0x5208  | LENC G12      | 0x08          | RW  | Bit[7:0]: Control point G12 for luminance compensation |
| 0x5209  | LENC G13      | 0x08          | RW  | Bit[7:0]: Control point G13 for luminance compensation |
| 0x520A  | LENC G14      | 0x08          | RW  | Bit[7:0]: Control point G14 for luminance compensation |
| 0x520B  | LENC G15      | 0x10          | RW  | Bit[7:0]: Control point G15 for luminance compensation |
| 0x520C  | LENC G20      | 0x10          | RW  | Bit[7:0]: Control point G20 for luminance compensation |
| 0x520D  | LENC G21      | 0x08          | RW  | Bit[7:0]: Control point G21 for luminance compensation |
| 0x520E  | LENC G22      | 0x00          | RW  | Bit[7:0]: Control point G22 for luminance compensation |
| 0x520F  | LENC G23      | 0x00          | RW  | Bit[7:0]: Control point G23 for luminance compensation |
| 0x5210  | LENC G24      | 0x08          | RW  | Bit[7:0]: Control point G24 for luminance compensation |
| 0x5211  | LENC G25      | 0x10          | RW  | Bit[7:0]: Control point G25 for luminance compensation |

**note**

There is a lens calibration tool that can be used for calibrating these settings required for a specific module. Contact your local OmniVision FAE for generating these settings.

table 5-2 LENC registers (sheet 2 of 6)

| address | register name | default value | R/W | description                                            |
|---------|---------------|---------------|-----|--------------------------------------------------------|
| 0x5212  | LENC G30      | 0x10          | RW  | Bit[7:0]: Control point G30 for luminance compensation |
| 0x5213  | LENC G31      | 0x08          | RW  | Bit[7:0]: Control point G31 for luminance compensation |
| 0x5214  | LENC G32      | 0x00          | RW  | Bit[7:0]: Control point G32 for luminance compensation |
| 0x5215  | LENC G33      | 0x00          | RW  | Bit[7:0]: Control point G33 for luminance compensation |
| 0x5216  | LENC G34      | 0x08          | RW  | Bit[7:0]: Control point G34 for luminance compensation |
| 0x5217  | LENC G35      | 0x10          | RW  | Bit[7:0]: Control point G35 for luminance compensation |
| 0x5218  | LENC G40      | 0x10          | RW  | Bit[7:0]: Control point G40 for luminance compensation |
| 0x5219  | LENC G41      | 0x08          | RW  | Bit[7:0]: Control point G41 for luminance compensation |
| 0x521A  | LENC G42      | 0x08          | RW  | Bit[7:0]: Control point G42 for luminance compensation |
| 0x521B  | LENC G43      | 0x08          | RW  | Bit[7:0]: Control point G43 for luminance compensation |
| 0x521C  | LENC G44      | 0x08          | RW  | Bit[7:0]: Control point G44 for luminance compensation |
| 0x521D  | LENC G45      | 0x10          | RW  | Bit[7:0]: Control point G45 for luminance compensation |
| 0x521E  | LENC G50      | 0x10          | RW  | Bit[7:0]: Control point G50 for luminance compensation |
| 0x521F  | LENC G51      | 0x10          | RW  | Bit[7:0]: Control point G51 for luminance compensation |
| 0x5220  | LENC G52      | 0x10          | RW  | Bit[7:0]: Control point G52 for luminance compensation |
| 0x5221  | LENC G53      | 0x10          | RW  | Bit[7:0]: Control point G53 for luminance compensation |
| 0x5222  | LENC G54      | 0x10          | RW  | Bit[7:0]: Control point G54 for luminance compensation |
| 0x5223  | LENC G55      | 0x10          | RW  | Bit[7:0]: Control point G55 for luminance compensation |

table 5-2 LENC registers (sheet 3 of 6)

| address | register name | default value | R/W | description                                                                                                             |
|---------|---------------|---------------|-----|-------------------------------------------------------------------------------------------------------------------------|
| 0x5224  | LENC BR00     | 0xAA          | RW  | Bit[7:4]: Control point B00 for blue channel compensation<br>Bit[3:0]: Control point R00 for red channel compensation   |
| 0x5225  | LENC BR01     | 0xAA          | RW  | Bit[7:4]: Control point B01 for blue channel compensation<br>Bit[3:0]: Control point R01 for red channel compensation   |
| 0x5226  | LENC BR02     | 0xAA          | RW  | Bit[7:4]: Control point B02 for blue channel compensation<br>Bit[3:0]: Control point R02 for red channel compensation   |
| 0x5227  | LENC BR03     | 0xAA          | RW  | Bit[7:4]: Control point B03 for blue channel compensation<br>Bit[3:0]: Control point R03 for red channel compensation   |
| 0x5228  | LENC BR04     | 0xAA          | RW  | Bit[7:4]: Control point B04 for blue channel compensation<br>Bit[3:0]: Control point R04 for red channel compensation   |
| 0x5229  | LENC BR10     | 0xAA          | RW  | Bit[7:4]: Control point B10 for blue channels compensation<br>Bit[3:0]: Control point R10 for red channels compensation |
| 0x522A  | LENC BR11     | 0x99          | RW  | Bit[7:4]: Control point B11 for blue channels compensation<br>Bit[3:0]: Control point R11 for red channels compensation |
| 0x522B  | LENC BR12     | 0x99          | RW  | Bit[7:4]: Control point B12 for blue channels compensation<br>Bit[3:0]: Control point R12 for red channels compensation |
| 0x522C  | LENC BR13     | 0x99          | RW  | Bit[7:4]: Control point B13 for blue channels compensation<br>Bit[3:0]: Control point R13 for red channels compensation |
| 0x522D  | LENC BR14     | 0xAA          | RW  | Bit[7:4]: Control point B14 for blue channels compensation<br>Bit[3:0]: Control point R14 for red channels compensation |

table 5-2 LENC registers (sheet 4 of 6)

| address | register name | default value | R/W | description                                                                                                             |
|---------|---------------|---------------|-----|-------------------------------------------------------------------------------------------------------------------------|
| 0x522E  | LENC BR20     | 0xAA          | RW  | Bit[7:4]: Control point B20 for blue channels compensation<br>Bit[3:0]: Control point R20 for red channels compensation |
| 0x522F  | LENC BR21     | 0x99          | RW  | Bit[7:4]: Control point B21 for blue channels compensation<br>Bit[3:0]: Control point R21 for red channels compensation |
| 0x5230  | LENC BR22     | 0x88          | RW  | Bit[7:4]: Control point B22 for blue channels compensation<br>Bit[3:0]: Control point R22 for red channels compensation |
| 0x5231  | LENC BR23     | 0x99          | RW  | Bit[7:4]: Control point B23 for blue channels compensation<br>Bit[3:0]: Control point R23 for red channels compensation |
| 0x5232  | LENC BR24     | 0xAA          | RW  | Bit[7:4]: Control point B24 for blue channels compensation<br>Bit[3:0]: Control point R24 for red channels compensation |
| 0x5233  | LENC BR30     | 0xAA          | RW  | Bit[7:4]: Control point B30 for blue channels compensation<br>Bit[3:0]: Control point R30 for red channels compensation |
| 0x5234  | LENC BR31     | 0x99          | RW  | Bit[7:4]: Control point B31 for blue channels compensation<br>Bit[3:0]: Control point R31 for red channels compensation |
| 0x5235  | LENC BR32     | 0x99          | RW  | Bit[7:4]: Control point B32 for blue channels compensation<br>Bit[3:0]: Control point R32 for red channels compensation |
| 0x5236  | LENC BR33     | 0x99          | RW  | Bit[7:4]: Control point B33 for blue channels compensation<br>Bit[3:0]: Control point R33 for red channels compensation |
| 0x5237  | LENC BR34     | 0xAA          | RW  | Bit[7:4]: Control point B34 for blue channels compensation<br>Bit[3:0]: Control point R34 for red channels compensation |

table 5-2 LENC registers (sheet 5 of 6)

| address | register name  | default value | R/W | description                                                                                                                                                                                                                         |
|---------|----------------|---------------|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x5238  | LENC BR40      | 0xAA          | RW  | Bit[7:4]: Control point B40 for blue channels compensation<br>Bit[3:0]: Control point R40 for red channels compensation                                                                                                             |
| 0x5239  | LENC BR41      | 0xAA          | RW  | Bit[7:4]: Control point B41 for blue channels compensation<br>Bit[3:0]: Control point R41 for red channels compensation                                                                                                             |
| 0x523A  | LENC BR42      | 0xAA          | RW  | Bit[7:4]: Control point B42 for blue channels compensation<br>Bit[3:0]: Control point R42 for red channels compensation                                                                                                             |
| 0x523B  | LENC BR43      | 0xAA          | RW  | Bit[7:4]: Control point B43 for blue channels compensation<br>Bit[3:0]: Control point R43 for red channels compensation                                                                                                             |
| 0x523C  | LENC BR44      | 0xAA          | RW  | Bit[7:4]: Control point B44 for blue channels compensation<br>Bit[3:0]: Control point R44 for red channels compensation                                                                                                             |
| 0x523D  | LENC BR OFFSET | 0x88          | RW  | Bit[7:4]: Base value for all blue channel control points<br>Bit[3:0]: Base value for all red channel control points                                                                                                                 |
| 0x523E  | MAXGAIN        | 0x40          | RW  | Bit[7:0]: If AutoLensSwitchEnable is true and sensor gain is larger than this threshold, luminance compensation amplitude will be the minimum value (min LENC gain). Register value is 16 times sensor gain.                        |
| 0x523F  | MINGAIN        | 0x20          | RW  | Bit[7:0]: If AutoLensSwitchEnable is true and sensor gain is larger than this threshold, luminance compensation amplitude will start to decrease; otherwise, the amplitude will not change. Register value is 16 times sensor gain. |

table 5-2 LENC registers (sheet 6 of 6)

| address | register name | default value | R/W | description                                                                                                                                                     |
|---------|---------------|---------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x5240  | MINQ          | 0x18          | RW  | Bit[6:0]: This value indicates the minimum amplitude which luminance channel compensates when AutoLensSwitchEnable is true. Value should be in the range [0~64] |

### 5.3 defect pixel cancellation (DPC)

Primarily due to process anomalies, pixel defects in the sensor array will occur, generating incorrect pixel levels and color values. The purpose of the DPC is to remove the effects caused by defective pixels.

table 5-3 DPC control registers

| address | register name | default value | R/W | description                                                                                                                  |
|---------|---------------|---------------|-----|------------------------------------------------------------------------------------------------------------------------------|
| 0x5000  | R ISP CTRL0   | 0x08          | RW  | Bit[2]: Remove black defect pixel<br>0: Disable<br>1: Enable<br>Bit[1]: Remove white defect pixel<br>0: Disable<br>1: Enable |

## 5.4 white balance, exposure and gain control

### 5.4.1 manual white balance (MWB)

The MWB provides digital gain for R, G, and B channels. Each channel gain is 12-bit. 0x400 is 1x gain.

**table 5-4** MWB control registers

| address | register name | default value | R/W | description                                                                                                  |
|---------|---------------|---------------|-----|--------------------------------------------------------------------------------------------------------------|
| 0x5056  | RED GAIN      | 0x04          | RW  | Bit[3:0]: MWB red gain[11:8]<br>Digital gain in red channel<br>Red gain = MWB red gain[11:0] / 0x400         |
| 0x5057  | RED GAIN      | 0x00          | RW  | Bit[7:0]: MWB red gain[7:0]<br>Digital gain in red channel<br>Red gain = MWB red gain[11:0] / 0x400          |
| 0x5058  | GRN GAIN      | 0x04          | RW  | Bit[3:0]: MWB green gain[11:8]<br>Digital gain in green channel<br>Green gain = MWB green gain[11:0] / 0x400 |
| 0x5059  | GRN GAIN      | 0x00          | RW  | Bit[3:0]: MWB green gain[7:0]<br>Digital gain in green channel<br>Green gain = MWB green gain[11:0] / 0x400  |
| 0x505A  | BLU GAIN      | 0x04          | RW  | Bit[3:0]: MWB blue gain[11:8]<br>Digital gain in blue channel<br>Blue gain = MWB blue gain[11:0] / 0x400     |
| 0x505B  | BLU GAIN      | 0x00          | RW  | Bit[7:0]: MWB blue gain[7:0]<br>Digital gain in blue channel<br>Blue gain = MWB blue gain[11:0] / 0x400      |
| 0x5001  | R ISP CTRL1   | 0x01          | RW  | Bit[1]: MWB gain enable<br>0: Disable<br>1: Enable                                                           |

## 5.4.2 manual exposure control (MEC)

Manual exposure provides exposure time settings. The exposure value in register 0x3500~0x3502 is in units of 1/16 line.

table 5-5 MEC control registers

| address | register name  | default value | R/W | description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------|----------------|---------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3500  | AEC LONG EXPO  | 0x00          | RW  | Long Exposure<br>Bit[3:0]: Long exposure[19:16]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 0x3501  | AEC LONG EXPO  | 0x02          | RW  | Long Exposure<br>Bit[7:0]: Long exposure[15:8]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 0x3502  | AEC LONG EXPO  | 0x00          | RW  | Long Exposure<br>Bit[7:0]: Long exposure[7:0]<br>Low 4 bits are fraction bits which are not supported and should always be 0.                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 0x3503  | AEC MANUAL     | 0x03          | RW  | AEC Manual Mode Control<br>Bit[5]: Gain delay option<br>0: 1 frame latch<br>1: Delay 1 frame latch<br>Bit[4]: Choose delay option<br>0: Delay disable<br>1: Delay enable<br>Bit[2]: VTS manual enable<br>There is no auto module in this device so this bit should always be 1<br>1: Manual enable<br>Bit[1]: AGC manual enable<br>There is no auto module in this device so this bit should always be 1<br>1: Manual enable<br>Bit[0]: AEC manual enable<br>There is no auto module in this device so this bit should be always 1<br>1: Manual enable |
| 0x3506  | AEC SHORT EXPO | 0x00          | RW  | Short Exposure<br>Bit[3:0]: Short exposure[19:16]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 0x3507  | AEC SHORT EXPO | 0x02          | RW  | Short Exposure<br>Bit[7:0]: Short exposure[15:8]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 0x3508  | AEC SHORT EXPO | 0x00          | RW  | Short Exposure<br>Bit[7:0]: Short exposure[7:0]<br>Low 4 bits are fraction bits which are not supported and should always be 0.                                                                                                                                                                                                                                                                                                                                                                                                                        |

### 5.4.3 manual gain control (MGC)

Manual gain provides analog gain settings. The OV13850 has a maximum 16x analog gain.

**table 5-6** MGC control registers (sheet 1 of 2)

| address | register name     | default value | R/W | description                                                                                                                                                              |
|---------|-------------------|---------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3504  | MAN SNR GAIN LONG | 0x00          | RW  | Manual Sensor Long Gain<br>Bit[1:0]: Manual sensor gain[9:8]                                                                                                             |
| 0x3505  | MAN SNR GAIN LONG | 0x00          | RW  | Manual Sensor Long Gain<br>Bit[7:0]: Manual sensor gain[7:0]                                                                                                             |
| 0x3509  | AEC GAIN CONVERT  | 0x10          | RW  | AEC Manual Mode Control<br>Bit[4]: Long sensor gain convert enable<br>0: Use sensor gain {0x350A,0x350B} as sensor gain<br>1: Use real gain {0x350A,0x350B} as real gain |
|         |                   |               |     | Bit[3]: Long sensor gain manual enable<br>0: Disable<br>1: Manual control {0x3504,0x3505}, cannot trigger BLC with these gain registers                                  |
| 0x3509  | AEC GAIN CONVERT  | 0x10          | RW  | Bit[1]: Short sensor gain convert enable<br>0: Use sensor gain {0x350E,0x350F} as sensor gain long<br>1: Use real gain {0x350E,0x350F} as real gain                      |
|         |                   |               |     | Bit[0]: Short sensor gain manual enable<br>0: Disable<br>1: Manual control {0x3514,0x3515}, cannot trigger BLC with these gain registers                                 |
| 0x350A  | GAIN LONG PK      | 0x00          | RW  | Long Gain Output to Sensor<br>Bit[2:0]: Gain[10:8]                                                                                                                       |

table 5-6 MGC control registers (sheet 2 of 2)

| address | register name      | default value | R/W | description                                                                                                                                                                                                                                                                            |
|---------|--------------------|---------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x350B  | GAIN LONG PK       | 0x10          | RW  | Long Gain Output to Sensor<br>Bit[7:0]: Gain[7:0]<br>When 0x3509[4] = 0, this gain is sensor gain. Real gain = $2^{N(16+X)}/16$ where N is number of 1 in bits gain[9:4] and X is the low bits gain[3:0]<br>When 0x3509[4] = 1, this gain is real gain. Low 4 bits are fraction bits.  |
| 0x350E  | GAIN SHORT PK      | 0x00          | RW  | Short Gain Output to Sensor<br>Bit[2:0]: Gain[10:8]                                                                                                                                                                                                                                    |
| 0x350F  | GAIN SHORT PK      | 0x10          | RW  | Short Gain Output to Sensor<br>Bit[7:0]: Gain[7:0]<br>When 0x3509[4] = 0, this gain is sensor gain. Real gain = $2^{N(16+X)}/16$ where N is number of 1 in bits gain[9:4] and X is the low bits gain[3:0]<br>When 0x3509[4] = 1, this gain is real gain. Low 4 bits are fraction bits. |
| 0x3514  | MAN SNR GAIN SHORT | 0x00          | RW  | Manual Sensor Short Gain<br>Bit[1:0]: Manual sensor gain[9:8]                                                                                                                                                                                                                          |
| 0x3515  | MAN SNR GAIN SHORT | 0x00          | RW  | Manual Sensor Short Gain<br>Bit[7:0]: Manual sensor gain[7:0]                                                                                                                                                                                                                          |

## 6 register tables

The following tables provide descriptions of the device control registers contained in the OV13850. The device slave addresses are 0x20 for write and 0x21 for read when SID= 0, 0x6C for write and 0x6D for read when SID= 1.

### 6.1 system control [0x0100 - 0x303E]

**table 6-1** system control registers (sheet 1 of 5)

| address | register name | default value | R/W | description                                                                                                                                                                                  |
|---------|---------------|---------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x0100  | MODE_SELECT   | 0x00          | RW  | Bit[7:1]: Not used<br>Bit[0]: Mode select<br>0: software_standby<br>1: Streaming                                                                                                             |
| 0x0102  | FAST_STANDBY  | 0x00          | RW  | Bit[7:1]: Not used<br>Bit[0]: Fast standby<br>0: Vblanking standby<br>1: Immediate standby                                                                                                   |
| 0x0103  | SOFTWARE_RST  | —             | W   | Bit[7:1]: Not used<br>Bit[0]: software_reset                                                                                                                                                 |
| 0x3002  | SC_PAD_OEN0   | 0x80          | RW  | Bit[7]: io_vsync_oen<br>Bit[6]: io_href_oen<br>Bit[5]: Debug mode<br>Bit[4]: io_freex_oen<br>Bit[3]: io_fsin_oen<br>Bit[2]: Debug mode<br>Bit[1]: io_gpio1_oen<br>Bit[0]: io_gpio0_oen       |
| 0x3005  | SC_PAD_OUT2   | 0x00          | RW  | Bit[7]: io_vsync_o<br>Bit[6]: io_href_o<br>Bit[5]: io_il_pwm<br>Bit[4]: io_freex_o<br>Bit[3]: io_fsin_o<br>Bit[2]: io_strobe_o<br>Bit[1]: io_gpio1_o<br>Bit[0]: io_gpio0_o                   |
| 0x3008  | PAD_SEL2      | 0x00          | RW  | Bit[7]: io_vsync_sel<br>Bit[6]: io_href_sel<br>Bit[5]: io_freex_sel<br>Bit[4]: io_strobe_sel<br>Bit[3]: io_fsin_sel<br>Bit[2]: io_il_pwm_sel<br>Bit[1]: io_gpio1_sel<br>Bit[0]: io_gpio0_sel |

table 6-1 system control registers (sheet 2 of 5)

| address | register name  | default value | R/W | description                                                                                                                                                      |
|---------|----------------|---------------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3009  | PAD_CTRL       | 0x06          | RW  | Bit[7]: Debug mode<br>Bit[6:5]: iP2X3v<br>Bit[4:3]: Debug mode<br>Bit[2]: pad_fsin_enb<br>Bit[1]: pad_frext_enb<br>Bit[0]: Debug mode                            |
| 0x300A  | SC_CHIP_ID     | 0xD8          | R   | Chip ID High Byte                                                                                                                                                |
| 0x300B  | SC_CHIP_ID     | 0x50          | R   | Chip ID Low Byte                                                                                                                                                 |
| 0x300C  | SC_SCCB_ID     | 0x20          | RW  | SCCB ID                                                                                                                                                          |
| 0x300D  | PUMP_CLK_CTRL  | 0x15          | RW  | Bit[7]: Debug mode<br>Bit[6:4]: p_pump_clk_div<br>Bit[2:0]: n_pump_clk_div                                                                                       |
| 0x300E  | PLL_CTRL1      | 0x00          | RW  | Bit[7:5]: Debug mode<br>Bit[4]: scale_div_man_en<br>Bit[3:0]: pll_scale_div                                                                                      |
| 0x300F  | MIPI_SC        | 0x11          | RW  | Bit[7:5]: Debug mode<br>Bit[4]: mipi_en<br>Bit[3:2]: Debug mode<br>Bit[1:0]: mipi_bit<br>00: 8-bit mode<br>01: 10-bit mode<br>10: 12-bit mode<br>11: Reserved    |
| 0x3010  | MIPI_PHY[15:8] | 0x00          | RW  | Bit[7:5]: slew_rate[2:0]<br>Bit[4]: pgm_bp_hs_en_lat<br>Bypass latch of hs_enable<br>Bit[3]: Relatch<br>Bit[2:0]: pgm_vcm[1:0]<br>High speed common mode voltage |
| 0x3011  | MIPI_PHY[7:0]  | 0x74          | RW  | Bit[7:4]: sel_drv<br>Bit[3:2]: pgm_lptx<br>Bit[1:0]: r_iref                                                                                                      |

table 6-1 system control registers (sheet 3 of 5)

| address | register name | default value | R/W | description                                                                                                                                                                                                                                         |
|---------|---------------|---------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3012  | MIPI_SC_CTRL0 | 0x41          | RW  | Bit[7:4]: lane_num<br>0000: 0 lane<br>0001: 1 lane<br>0010: 2 lanes<br>0100: 4 lanes<br>Bit[3]: mipi_phy_rst_o<br>Bit[2]: r_phy_pd_mipi<br>1: Power down PHY HS TX<br>Bit[1]: r_phy_pd_lprx<br>1: Power down PHY LP RX module<br>Bit[0]: phy_pad_en |
| 0x3013  | MIPI_SC_CTRL1 | 0x00          | RW  | Bit[7]: Debug mode<br>Bit[6:4]: mipi_d2_skew<br>Bit[3]: Debug mode<br>Bit[2:0]: mipi_d1_skew                                                                                                                                                        |
| 0x3014  | MIPI_SC_CTRL2 | 0x00          | RW  | Bit[7]: Debug mode<br>Bit[6:4]: mipi_d4_skew<br>Bit[3]: Debug mode<br>Bit[2:0]: mipi_d3_skew                                                                                                                                                        |
| 0x3015  | MIPI_SC_CTRL3 | 0x00          | RW  | Bit[7]: mipi_lane_dis4<br>Bit[6]: mipi_lane_dis3<br>Bit[5]: mipi_lane_dis2<br>Bit[4]: mipi_lane_dis1<br>Bit[3]: mipi_ck_lane_dis<br>Bit[2]: mipi_lp_sr<br>Bit[1:0]: mipi_ck_skew_o                                                                  |
| 0x3016  | SC_CLKRST0    | 0xF0          | RW  | Bit[7]: sclk_ac<br>Bit[6]: sclk_stb<br>Bit[5]: sclk_ofc<br>Bit[4]: sclk_tc<br>Bit[3]: rst_ac<br>Bit[2]: rst_stb<br>Bit[1]: rst_ofc<br>Bit[0]: rst_tc                                                                                                |
| 0x3017  | SC_CLKRST1    | 0xF0          | RW  | Bit[7]: sclk_tpm<br>Bit[6]: sclk_isp<br>Bit[5]: sclk_arb<br>Bit[4]: sclk_vfifo<br>Bit[3]: rst_tpm<br>Bit[2]: rst_isp<br>Bit[1]: rst_arb<br>Bit[0]: rst_vfifo                                                                                        |

table 6-1 system control registers (sheet 4 of 5)

| address | register name     | default value | R/W | description                                                                                                                                                                                                                                                                      |
|---------|-------------------|---------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3018  | SC_CLKRST2        | 0xF0          | RW  | Bit[7]: Debug mode<br>Bit[6]: sclk_mipi<br>Bit[5]: sclk_hsub<br>Bit[4]: sclk_otp<br>Bit[3]: Debug mode<br>Bit[2]: rst_mipi<br>Bit[1]: rst_hsub<br>Bit[0]: rst_otp                                                                                                                |
| 0x3019  | SC_CLKRST3        | 0xF0          | RW  | Bit[7]: sclk_blc<br>Bit[6]: sclk_ispfc<br>Bit[5]: sclk_fmt<br>Bit[4]: sclk_emblne<br>Bit[3]: rst_blc<br>Bit[2]: rst_ispfc<br>Bit[1]: rst_fmt<br>Bit[0]: rst_emblne                                                                                                               |
| 0x301A  | SC_CLKRST4        | 0xF0          | RW  | Bit[7]: sclk_grp<br>Bit[6]: padclk_mipi_sc<br>Bit[5]: pclk_vfifo<br>Bit[4]: pclk_mipi<br>Bit[3]: rst_grp<br>Bit[2]: rst_mipi_sc<br>Bit[1]: rst_illum<br>Bit[0]: Debug mode                                                                                                       |
| 0x301B  | SC_CLKRST5        | 0xB4          | RW  | Bit[7:6]: dac_clk_sel<br>Bit[5]: sclk_bist20<br>Bit[4]: sclk_snr_sync<br>Bit[3]: sclk_grp_fix<br>Bit[2]: dacclk_en<br>Bit[1]: rst_bist20<br>Bit[0]: rst_snr_sync                                                                                                                 |
| 0x301C  | SC_FREX_RST_MASK0 | 0x01          | RW  | Bit[7]: Debug mode<br>Bit[6]: frex_mask_illum_disable<br>Bit[5]: frex_mask_sync_fifo_disable<br>Bit[4]: frex_mask_emb_disable<br>Bit[3]: frex_mask_ispfc_disable<br>Bit[2]: frex_mask_blc_fmt_disable<br>Bit[1]: frex_mask_fc_disable<br>Bit[0]: frex_mask_stb_disable           |
| 0x301D  | SC_FREX_RST_MASK1 | 0x02          | RW  | Bit[7]: frex_mask_ofc_disable<br>Bit[6]: frex_mask_tpm_disable<br>Bit[5]: frex_mask_isp_disable<br>Bit[4]: frex_mask_dvp_disable<br>Bit[3]: frex_mask_mipi_disable<br>Bit[2]: frex_mask_vfifo_fmt_disable<br>Bit[1]: frex_mask_arb_disable<br>Bit[0]: frex_mask_mipi_phy_disable |

table 6-1 system control registers (sheet 5 of 5)

| address | register name    | default value | R/W | description                                                                                                                                                                                                                                                                                                                           |
|---------|------------------|---------------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x301E  | SC_CLOCK_SEL     | 0x00          | RW  | Bit[7:5]: sdiv<br>Divider for sigma-delta<br>0: Use pll_pclk_i for sclk<br>1: Use pll_sclk_i for sclk<br>Bit[4]: Debug mode<br>Bit[3]: pclk_sel<br>Bit[2:1]: sclk_sel<br>Bit[0]: sclk2x_sel                                                                                                                                           |
| 0x301F  | SC_MISC_CTRL     | 0x03          | RW  | Bit[7:1]: Debug mode<br>Bit[0]: cen_global_o                                                                                                                                                                                                                                                                                          |
| 0x3020  | LOW_PWR_CTR      | 0x00          | RW  | Bit[7]: Debug mode<br>Bit[6]: phy_pd_mipi_pwdn_dis<br>Bit[5]: phy_pd_lprx_pwdn_dis<br>Bit[4]: stb_rst_dis<br>0: Reset all blocks at software standby mode<br>1: TC, sensor_control, ISP are reset, others not<br>Bit[3]: pd_ana_dis<br>Bit[2]: pd_big_regulator_dis<br>Bit[1]: phy_pd_mipi_slppd_dis<br>Bit[0]: phy_pd_lprx_slppd_dis |
| 0x302A  | SC_CHIP_REVISION | 0xB0          | R   | Chip Revision                                                                                                                                                                                                                                                                                                                         |
| 0x303D  | SC_GP_IO_IN0     | –             | R   | Bit[7:5]: Debug mode<br>Bit[4]: tpm_db<br>Bit[3:0]: Debug mode                                                                                                                                                                                                                                                                        |
| 0x303E  | SC_GP_IO_IN1     | –             | R   | Bit[7]: Debug mode<br>Bit[6:5]: p_gpio_i<br>Bit[4]: p_vsync_i<br>Bit[3]: p_href_i<br>Bit[2:0]: Debug mode                                                                                                                                                                                                                             |

## 6.2 PLL1 [0x0300 ~ 0x030A]

table 6-2 PLL1 registers (sheet 1 of 2)

| address | register name | default value | R/W | description                                                                                                                                                                                                                                        |
|---------|---------------|---------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x0300  | PLL1_CTRL_0   | 0x00          | RW  | Bit[7:3]: Debug mode<br>Bit[2:0]: PLL1_PREDIV<br>000: /1<br>001: /1.5<br>010: /2<br>011: /2.5<br>100: /3<br>101: /4<br>110: /6<br>111: /8                                                                                                          |
| 0x0301  | PLL1_CTRL_1   | 0x00          | RW  | Bit[7:23]: Debug mode<br>Bit[1:0]: PLL1_DIVP[9:8]                                                                                                                                                                                                  |
| 0x0302  | PLL1_CTRL_2   | 0x2A          | RW  | Bit[7:0]: PLL1_DIVP[7:0]                                                                                                                                                                                                                           |
| 0x0303  | PLL1_CTRL_3   | 0x00          | RW  | Bit[7:4]: Debug mode<br>Bit[3:0]: PLL1_DIVM<br>0000: /1<br>0001: /2<br>0010: /3<br>0011: /4<br>0100: /5<br>0101: /6<br>0110: /7<br>0111: /8<br>1000: /9<br>1001: /10<br>1010: /11<br>1011: /12<br>1100: /13<br>1101: /14<br>1110: /15<br>1111: /16 |
| 0x0304  | PLL1_CTRL_4   | 0x03          | RW  | Bit[7:2]: Debug mode<br>Bit[1:0]: PLL1_DIV_MIPI<br>00: /4<br>01: /5<br>10: /6<br>11: /8                                                                                                                                                            |

table 6-2 PLL1 registers (sheet 2 of 2)

| address | register name | default value | R/W | description                                                                           |
|---------|---------------|---------------|-----|---------------------------------------------------------------------------------------|
| 0x0305  | PLL1_CTRL_5   | 0x01          | RW  | Bit[7:2]: Debug mode<br>Bit[1:0]: PLL1_DIV_SP<br>00: /3<br>01: /4<br>10: /5<br>11: /6 |
| 0x0306  | PLL1_CTRL_6   | 0x01          | RW  | Bit[7:1]: Debug mode<br>Bit[0]: PLL1_DIV_S<br>0: /1<br>1: /2                          |
| 0x0308  | PLL1_CTRL_8   | 0x00          | RW  | Bit[7:1]: Debug mode<br>Bit[0]: PLL1_bypass                                           |
| 0x0309  | PLL1_CTRL_9   | 0x01          | RW  | Bit[7:31]: Debug mode<br>Bit[2:0]: PLL1_CP                                            |
| 0x030A  | PLL1_CTRL_A   | 0x00          | RW  | Bit[7:1]: Debug mode<br>Bit[0]: PLL1_PREDIVP<br>0: /1<br>1: /2                        |

### 6.3 PLL2 control [0x3600 ~ 0x3615]

table 6-3 PLL2 registers (sheet 1 of 3)

| address           | register name | default value | R/W | description                                                                         |
|-------------------|---------------|---------------|-----|-------------------------------------------------------------------------------------|
| 0x3600~<br>0x360F | ANALOG_CTRL   | –             | –   | Analog Control Registers                                                            |
| 0x3610            | ASP_CTRL16    | 0x00          | RW  | Bit[7:5]: R_TPM[7:5]<br>Empty<br>Bit[4:0]: R_TPM[4:0]<br>Temperature meter trimming |

table 6-3 PLL2 registers (sheet 2 of 3)

| address | register name | default value | R/W | description                                                                                                                                                                                                                                                                                                 |
|---------|---------------|---------------|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3611  | ASP_CTRL17    | 0x10          | RW  | Bit[7]: PLL2_bypass<br>0: Working<br>1: Bypass<br>Bit[6:4]: PLL2_CP<br>Default 001<br>Bit[3]: PLL2_PREDIVP<br>0: By 1<br>1: By 2<br>Bit[2:0]: PLL2_PREDIV<br>000: 1<br>001: 1.5<br>010: 2<br>011: 2.5<br>100: 3<br>101: 4<br>110: 6<br>111: 8                                                               |
| 0x3612  | ASP_CTRL18    | 0x23          | RW  | Bit[7]: Power down pump clock divider<br>0: Working<br>1: Power down<br>Bit[6:4]: PLL2_DIVS<br>System clock divider control bits<br>000: 1<br>001: 1.5<br>010: 2<br>011: 2.5<br>100: 3<br>101: 3.5<br>110: 4<br>111: 5<br>Bit[3:0]: PLL2_DIVSP<br>System clock pre_divider control bit<br>value = [3:0] + 1 |
| 0x3613  | ASP_CTRL19    | 0x33          | RW  | Bit[7:4]: PLL2_DIVSRAM<br>SRAM clock divider control bit<br>value = [3:0] + 1<br>Bit[3:0]: PLL2_DIVDAC<br>DAC clock divider control bit<br>value = [3:0] + 1                                                                                                                                                |
| 0x3614  | ASP_CTRL20    | 0x28          | RW  | Bit[7:0]: PLL2_DIVP[7:0]<br>Loop divider control value = [9:0]                                                                                                                                                                                                                                              |

table 6-3 PLL2 registers (sheet 3 of 3)

| address | register name | default value | R/W | description                                                                                                                                                                                                                        |
|---------|---------------|---------------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3615  | ASP_CTRL21    | 0x1C          | RW  | Bit[7:6]: Debug mode<br>Bit[5:4]: N_pump clock div[1:0]<br>Div number<br>00: /2<br>01: /3<br>10: /4<br>11: /8<br>Bit[3:2]: P_pump clock div[1:0]<br>Div number<br>00: /2<br>01: /3<br>10: /4<br>11: /8<br>Bit[1:0]: PLL2_DIVP[9:8] |

## 6.4 SCCB [0x3100 - 0x3104]

table 6-4 SCCB control registers (sheet 1 of 2)

| address | register name  | default value | R/W | description                                                                                                                                                                                                                                                                |
|---------|----------------|---------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3100  | SB_SCCB_CTRL   | 0x00          | RW  | Bit[7:4]: Debug mode<br>Bit[3]: r_sda_dly_en<br>Bit[2:0]: r_sda_dly                                                                                                                                                                                                        |
| 0x3101  | SB_SCCB_OPT    | 0x12          | RW  | Bit[7:5]: Debug mode<br>Bit[4]: en_ss_addr_inc<br>Bit[3]: r_sda_byp_sync<br>0: Two clock stage sync for sda_i<br>1: No sync for sda_i<br>Bit[2]: r_scl_byp_sync<br>0: Two clock stage sync for scl_i<br>1: No sync for scl_i<br>Bit[1]: r_msk_glitch<br>Bit[0]: r_msk_stop |
| 0x3102  | SB_SCCB_FILTER | 0x00          | RW  | Bit[7:4]: r_sda_num<br>Bit[3:0]: r_scl_num                                                                                                                                                                                                                                 |
| 0x3103  | DEBUG MODE     | –             | –   | Debug Mode                                                                                                                                                                                                                                                                 |

table 6-4 SCCB control registers (sheet 2 of 2)

| address | register name | default value | R/W | description                                                                                                                |
|---------|---------------|---------------|-----|----------------------------------------------------------------------------------------------------------------------------|
| 0x3104  | PLL_BYP_RST   | 0x00          | RW  | Bit[7:5]: Debug mode<br>Bit[4]: srb_clk_sync_en<br>Bit[3:2]: wkup_wait_time_opt<br>Bit[1]: pll_clk_sel<br>Bit[0]: Reserved |

## 6.5 group hold [0x3200 - 0x3213]

table 6-5 group hold registers (sheet 1 of 2)

| address | register name | default value | R/W | description                                                                                                                                                                                                                                            |
|---------|---------------|---------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3200  | GROUP ADR0    | 0x00          | RW  | Group0 Start Address in SRAM, Actual Address is {0x3200[3:0], 0x0}                                                                                                                                                                                     |
| 0x3201  | GROUP ADR1    | 0x08          | RW  | Group1 Start Address in SRAM, Actual Address is {0x3201[3:0], 0x0}                                                                                                                                                                                     |
| 0x3202  | GROUP ADR2    | 0x10          | RW  | Group2 Start Address in SRAM, Actual Address is {0x3202[3:0], 0x0}                                                                                                                                                                                     |
| 0x3203  | GROUP ADR3    | 0x18          | RW  | Group3 Start Address in SRAM, Actual Address is {0x3203[3:0], 0x0}                                                                                                                                                                                     |
| 0x3204  | GROUP LEN0    | –             | W   | Length of Group0                                                                                                                                                                                                                                       |
| 0x3205  | GROUP LEN1    | –             | W   | Length of Group1                                                                                                                                                                                                                                       |
| 0x3206  | GROUP LEN2    | –             | W   | Length of Group2                                                                                                                                                                                                                                       |
| 0x3207  | GROUP LEN3    | –             | W   | Length of Group3                                                                                                                                                                                                                                       |
| 0x3208  | GROUP ACCESS  | –             | W   | Bit[7:4]: group_ctrl<br>0000: Group hold start<br>0001: Group hold end<br>1010: Group launch<br>Others: Debug mode<br>Bit[3:0]: group ID<br>0000: Group bank 0<br>0001: Group bank 1<br>0010: Group bank 2<br>0011: Group bank 3<br>Others: Debug mode |
| 0x3209  | GROUP0 PERIOD | 0x00          | RW  | Number of Frames to Stay in Group 0                                                                                                                                                                                                                    |
| 0x320A  | GROUP1 PERIOD | 0x00          | RW  | Number of Frames to Stay in Group 1                                                                                                                                                                                                                    |

table 6-5 group hold registers (sheet 2 of 2)

| address           | register name | default value | R/W | description                                                                                                                                             |
|-------------------|---------------|---------------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x320B            | GRP_SW_CTRL   | 0x01          | RW  | Bit[7]: auto_sw<br>Bit[6:5]: Debug mode<br>Bit[4]: frame_cnt_trig<br>Bit[3]: group_switch_repeat<br>Bit[2]: context_en<br>Bit[1:0]: Second group select |
| 0x320C            | DEBUG MODE    | –             | –   | Debug Mode                                                                                                                                              |
| 0x320D            | GRP_ACT       | –             | R   | Active Group Indicator                                                                                                                                  |
| 0x320E            | FM_CNT_GRP0   | –             | R   | Group 0 Frame Count                                                                                                                                     |
| 0x320F            | FM_CNT_GRP1   | –             | R   | Group 1 Frame Count                                                                                                                                     |
| 0x3210~<br>0x3213 | DEBUG MODE    | –             | –   | Debug Mode                                                                                                                                              |

## 6.6 strobe [0x3B00 - 0x3B05]

table 6-6 strobe control registers (sheet 1 of 2)

| address | register name | default value | R/W | description                                                                                                                                                                                                                                                            |
|---------|---------------|---------------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3B00  | STROBE CTRL0  | 0x00          | RW  | Bit[7]: STROBE on/off<br>Bit[6]: STROBE polarity<br>0: Active high<br>1: Active low<br>Bit[5:4]: width_in_xenon<br>Bit[2:0]: Mode<br>000: Xenon<br>001: LED1<br>010: LED2<br>011: LED3<br>100: LED4                                                                    |
| 0x3B02  | STROBE DMY H  | 0x00          | RW  | Dummy Lines Added At Strobe Mode, MSB                                                                                                                                                                                                                                  |
| 0x3B03  | STROBE DMY L  | 0x00          | RW  | Dummy Lines Added At Strobe Mode, LSB                                                                                                                                                                                                                                  |
| 0x3B04  | STROBE CTRL1  | 0x00          | RW  | Bit[7:4]: Debug mode<br>Bit[3]: Start_point_sel<br>Bit[2]: Strobe repeat enable<br>Bit[1:0]: Strobe latency<br>00: Strobe generated at next frame<br>01: Strobe generated 2 frames later<br>10: Strobe generated 3 frames later<br>11: Strobe generated 4 frames later |

table 6-6 strobe control registers (sheet 2 of 2)

| address | register name | default value | R/W | description                                                                                                                                                                |
|---------|---------------|---------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3B05  | STROBE WIDTH  | 0x00          | RW  | Bit[7:2]: Strobe pulse width step<br>Bit[1:0]: Strobe pulse width gain<br>strobe_pulse_width =<br>$128 \times (2^{\text{gain}}) \times (\text{step}+1) \times \text{Tclk}$ |

Confidential for  
CMK

## 6.7 MEC control [0x3500 - 0x3508]

**table 6-7** MEC control registers

| address | register name  | default value | R/W | description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------|----------------|---------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3500  | AEC LONG EXPO  | 0x00          | RW  | Long Exposure<br>Bit[3:0]: Long exposure[19:16]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 0x3501  | AEC LONG EXPO  | 0x02          | RW  | Long Exposure<br>Bit[7:0]: Long exposure[15:8]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 0x3502  | AEC LONG EXPO  | 0x00          | RW  | Long Exposure<br>Bit[7:0]: Long exposure[7:0]<br>Low 4 bits are fraction bits which are not supported and should always be 0.                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 0x3503  | AEC MANUAL     | 0x03          | RW  | AEC Manual Mode Control<br>Bit[5]: Gain delay option<br>0: 1 frame latch<br>1: Delay 1 frame latch<br>Bit[4]: Choose delay option<br>0: Delay disable<br>1: Delay enable<br>Bit[2]: VTS manual enable<br>There is no auto module in this device so this bit should always be 1<br>1: Manual enable<br>Bit[1]: AGC manual enable<br>There is no auto module in this device so this bit should always be 1<br>1: Manual enable<br>Bit[0]: AEC manual enable<br>There is no auto module in this device so this bit should be always 1<br>1: Manual enable |
| 0x3506  | AEC SHORT EXPO | 0x00          | RW  | Short Exposure<br>Bit[3:0]: Short exposure[19:16]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 0x3507  | AEC SHORT EXPO | 0x02          | RW  | Short Exposure<br>Bit[7:0]: Short exposure[15:8]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 0x3508  | AEC SHORT EXPO | 0x00          | RW  | Short Exposure<br>Bit[7:0]: Short exposure[7:0]<br>Low 4 bits are fraction bits which are not supported and should always be 0.                                                                                                                                                                                                                                                                                                                                                                                                                        |

## 6.8 MGC control [0x3504 - 0x3515]

table 6-8 MGC control registers (sheet 1 of 2)

| address | register name     | default value | R/W | description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------|-------------------|---------------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3504  | MAN SNR GAIN LONG | 0x00          | RW  | Manual Sensor Long Gain<br>Bit[7:2]: Debug mode<br>Bit[1:0]: Manual sensor gain[9:8]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 0x3505  | MAN SNR GAIN LONG | 0x00          | RW  | Manual Sensor Long Gain<br>Bit[7:0]: Manual sensor gain[7:0]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 0x3509  | AEC GAIN CONVERT  | 0x10          | RW  | AEC Manual Mode Control<br>Bit[7:5]: Debug mode<br>Bit[4]: Long sensor gain convert enable<br>0: Use sensor gain {0x350A,0x350B} as sensor gain<br>1: Use real gain {0x350A,0x350B} as real gain<br>Bit[3]: Long sensor gain manual enable<br>0: Disable<br>1: Manual control {0x3504,0x3505}, cannot trigger BLC with these gain registers<br>Bit[1]: Short sensor gain convert enable<br>0: Use sensor gain {0x350E,0x350F} as sensor gain long<br>1: Use real gain {0x350E,0x350F} as real gain<br>Bit[0]: Short sensor gain manual enable<br>0: Disable<br>1: Manual control {0x3514,0x3515}, cannot trigger BLC with these gain registers |
| 0x350A  | GAIN LONG PK      | 0x00          | RW  | Long Gain Output to Sensor<br>Bit[7:3]: Debug mode<br>Bit[2:0]: Gain[10:8]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

table 6-8 MGC control registers (sheet 2 of 2)

| address | register name      | default value | R/W | description                                                                                                                                                                                                                                                                            |
|---------|--------------------|---------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x350B  | GAIN LONG PK       | 0x10          | RW  | Long Gain Output to Sensor<br>Bit[7:0]: Gain[7:0]<br>When 0x3509[4] = 0, this gain is sensor gain. Real gain = $2^{N(16+X)/16}$ where N is number of 1 in bits gain[9:4] and X is the low bits gain[3:0]<br>When 0x3509[4] = 1, this gain is real gain. Low 4 bits are fraction bits.  |
| 0x350E  | GAIN SHORT PK      | 0x00          | RW  | Short Gain Output to Sensor<br>Bit[7:3]: Debug mode<br>Bit[2:0]: Gain[10:8]                                                                                                                                                                                                            |
| 0x350F  | GAIN SHORT PK      | 0x10          | RW  | Short Gain Output to Sensor<br>Bit[7:0]: Gain[7:0]<br>When 0x3509[4] = 0, this gain is sensor gain. Real gain = $2^{N(16+X)/16}$ where N is number of 1 in bits gain[9:4] and X is the low bits gain[3:0]<br>When 0x3509[4] = 1, this gain is real gain. Low 4 bits are fraction bits. |
| 0x3514  | MAN SNR GAIN SHORT | 0x00          | RW  | Manual Sensor Short Gain<br>Bit[7:2]: Debug mode<br>Bit[1:0]: Manual sensor gain[9:8]                                                                                                                                                                                                  |
| 0x3515  | MAN SNR GAIN SHORT | 0x00          | RW  | Manual Sensor Short Gain<br>Bit[7:0]: Manual sensor gain[7:0]                                                                                                                                                                                                                          |

## 6.9 timing control [0x3800 - 0x3835]

table 6-9 timing control registers (sheet 1 of 3)

| address | register name | default value | R/W | description                                                           |
|---------|---------------|---------------|-----|-----------------------------------------------------------------------|
| 0x3800  | H_CROP_START  | 0x00          | RW  | Bit[7:5]: Debug mode<br>Bit[4:0]: Horizontal crop start address[12:8] |
| 0x3801  | H_CROP_START  | 0x20          | RW  | Bit[7:0]: Horizontal crop start address[7:0]                          |
| 0x3802  | V_CROP_START  | 0x00          | RW  | Bit[7:4]: Debug mode<br>Bit[3:0]: Vertical crop start address[11:8]   |

table 6-9 timing control registers (sheet 2 of 3)

| address | register name | default value | R/W | description                                                                                                 |
|---------|---------------|---------------|-----|-------------------------------------------------------------------------------------------------------------|
| 0x3803  | V_CROP_START  | 0x0C          | RW  | Bit[7:0]: Vertical crop start address[7:0]                                                                  |
| 0x3804  | H_CROP_END    | 0x10          | RW  | Bit[7:5]: Debug mode<br>Bit[4:0]: Horizontal crop end address[12:8]                                         |
| 0x3805  | H_CROP_END    | 0x8B          | RW  | Bit[7:0]: Horizontal crop end address[7:0]                                                                  |
| 0x3806  | V_CROP_END    | 0x0C          | RW  | Bit[7:4]: Debug mode<br>Bit[3:0]: Vertical crop end address[11:8]                                           |
| 0x3807  | V_CROP_END    | 0x43          | RW  | Bit[7:0]: Vertical crop end address[7:0]                                                                    |
| 0x3808  | H_OURPUT_SIZE | 0x10          | RW  | Bit[7:5]: Debug mode<br>Bit[4:0]: Horizontal output size[12:8]                                              |
| 0x3809  | H_OUTPUT_SIZE | 0x70          | RW  | Bit[7:0]: Horizontal output size[7:0]                                                                       |
| 0x380A  | V_OURPUT_SIZE | 0x0C          | RW  | Bit[7:4]: Debug mode<br>Bit[3:0]: Vertical output size[11:8]                                                |
| 0x380B  | V_OUTPUT_SIZE | 0x30          | RW  | Bit[7:0]: Vertical output size[7:0]                                                                         |
| 0x380C  | TIMING_HTS    | 0x12          | RW  | Bit[7]: Debug mode<br>Bit[6:0]: Horizontal total size[14:8]                                                 |
| 0x380D  | TIMING_HTS    | 0xC0          | RW  | Bit[7:0]: Horizontal total size[7:0]                                                                        |
| 0x380E  | TIMING_VTS    | 0x0D          | RW  | Bit[7]: Debug mode<br>Bit[6:0]: Vertical total size[14:8]                                                   |
| 0x380F  | TIMING_VTS    | 0x00          | RW  | Bit[7:0]: Vertical total size[7:0]                                                                          |
| 0x3810  | H_WIN_OFF     | 0x00          | RW  | Bit[7:4]: Debug mode<br>Bit[3:0]: Horizontal windowing offset[11:8]                                         |
| 0x3811  | H_WIN_OFF     | 0x04          | RW  | Bit[7:0]: Horizontal windowing offset[7:0]                                                                  |
| 0x3812  | V_WIN_OFF     | 0x00          | RW  | Bit[7:4]: Debug mode<br>Bit[3:0]: Vertical windowing offset[11:8]                                           |
| 0x3813  | V_WIN_OFF     | 0x04          | RW  | Bit[7:0]: Vertical windowing offset[7:0]                                                                    |
| 0x3814  | H_INC         | 0x11          | RW  | Bit[7:4]: Horizontal sub-sample odd increase number<br>Bit[3:0]: Horizontal sub-sample even increase number |
| 0x3815  | V_INC         | 0x11          | RW  | Bit[7:4]: Vertical sub-sample odd increase number<br>Bit[3:0]: Vertical sub-sample even increase number     |
| 0x3820  | FORMAT 0      | 0x00          | RW  | Bit[7:3]: Debug mode<br>Bit[2]: vflip<br>Bit[1]: vbinf<br>Bit[0]: vbin                                      |

table 6-9 timing control registers (sheet 3 of 3)

| address           | register name | default value | R/W | description                                                                                          |
|-------------------|---------------|---------------|-----|------------------------------------------------------------------------------------------------------|
| 0x3821            | FORMAT 1      | 0x00          | RW  | Bit[7:3]: Debug mode<br>Bit[2]: Mirror<br>Bit[1]: dig_subsample<br>Bit[0]: hbin                      |
| 0x382A~<br>0x382E | DEBUG MODE    | –             | –   | Debug Mode                                                                                           |
| 0x382F            | REG2F         | 0x04          | RW  | Bit[7:5]: Debug mode<br>Bit[4]: vsync_polarity<br>Bit[3:0]: vsync_width                              |
| 0x3830            | REG30         | 0x00          | RW  | Bit[7:0]: vsync_rising_rcnt[15:8]                                                                    |
| 0x3831            | REG31         | 0x00          | RW  | Bit[7:0]: vsync_rising_rcnt[7:0]                                                                     |
| 0x3832            | REG32         | 0x00          | RW  | Bit[7:0]: vsync_rising_ccnt[15:8]                                                                    |
| 0x3833            | REG33         | 0x01          | RW  | Bit[7:0]: vsync_rising_ccnt[7:0]                                                                     |
| 0x3834            | REG34         | 0x00          | RW  | Bit[7:4]: Debug mode<br>Bit[3]: drop_rgb<br>Bit[2]: drop_w<br>Bit[1]: hsub_post<br>Bit[0]: hbin_post |
| 0x3835            | REG35         | 0x14          | RW  | Bit[4]: cut_en<br>Bit[3]: vts_auto_en<br>Bit[2]: blk_col_dis<br>Bit[1:0]: href_w                     |

## 6.10 BLC [0x4000 ~ 0x4041]

table 6-10 BLC control registers (sheet 1 of 2)

| address | register name | default value | R/W | description                                                                                                                                                                             |
|---------|---------------|---------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x4000  | BLC CTRL00    | 0xF1          | RW  | Bit[7]: outrange_trig_en<br>Offset out of range trigger function enable signal<br>0: Disable<br>1: Enable                                                                               |
|         |               |               |     | Bit[6]: format_chg_en<br>Format change trigger function enable signal<br>0: Disable<br>1: Enable                                                                                        |
|         |               |               |     | Bit[5]: gain_chg_en<br>Gain change trigger function enable signal<br>0: Disable<br>1: Enable                                                                                            |
|         |               |               |     | Bit[4]: Not used                                                                                                                                                                        |
|         |               |               |     | Bit[3]: manual_trig<br>Manual trigger signal<br>Its rising edge will trigger BLC                                                                                                        |
|         |               |               |     | Bit[2]: freeze_en<br>BLC freeze function enable signal<br>When it is set, the BLC will be frozen. Offsets will keep the their pre-frame values.                                         |
|         |               |               |     | Bit[1]: always_do<br>BLC always trigger signal<br>When it is set, the BLC will be triggered every frame unless the freeze_en is enabled.                                                |
| 0x4001  | BLC CTRL01    | 0x00          | RW  | Bit[0]: median_en<br>5-point median filter function enable signal<br>0: Disable<br>1: Enable                                                                                            |
|         |               |               |     | Bit[7:2]: Not used                                                                                                                                                                      |
|         |               |               |     | Bit[1]: blc_cut_range_en                                                                                                                                                                |
|         |               |               |     | Bit[0]: remove_row_offset_en<br>Column delta offset remove function enable signal<br>0: Used offset does not include column delta offset<br>1: Used offset includes column delta offset |
| 0x4002  | BLC CTRL 02   | 0x04          | RW  | Bit[7:0]: offset_lim_value                                                                                                                                                              |

table 6-10 BLC control registers (sheet 2 of 2)

| address           | register name      | default value | R/W | description                                  |
|-------------------|--------------------|---------------|-----|----------------------------------------------|
| 0x4003            | BLC CTRL 03        | 0x14          | RW  | Bit[7:0]: blk_num                            |
| 0x4004            | TARGET             | 0x00          | RW  | Bit[7:0]: Target[15:8]<br>Target high 8 bits |
| 0x4005            | TARGET             | 0x10          | RW  | Bit[7:0]: Target[7:0]<br>Target low 8 bits   |
| 0x4006            | BLC CTRL 06        | 0x1F          | RW  | Bit[7:0]: format_trig_framenumber            |
| 0x4007            | BLC CTRL 07        | 0x1F          | RW  | Bit[7:0]: reset_trig_framenumber             |
| 0x4008            | BLC CTRL 08        | 0x01          | RW  | Bit[7:0]: manual_trig_framenumber            |
| 0x4009~<br>0x400B | DEBUG MODE         | –             | –   | Debug Mode                                   |
| 0x400C            | OFFSET TRIG THRESH | 0x00          | RW  | Bit[7:0]: offset_trig_thresh[15:8]           |
| 0x400D            | OFFSET TRIG THRESH | 0x20          | RW  | Bit[7:0]: offset_trig_thresh[7:0]            |
| 0x400E~<br>0x4041 | DEBUG MODE         | –             | –   | Debug Mode                                   |

## 6.11 ISP\_top [0x5000 - 0x5065]

table 6-11 ISP\_top registers (sheet 1 of 3)

| address | register name | default value | R/W | description                                                                                                                                                                                                                       |
|---------|---------------|---------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x5000  | R ISP CTRL0   | 0x08          | RW  | Bit[7:4]: Debug mode<br>Bit[3]: Windowing enable<br>Bit[2]: Black defect pixel cancellation enable<br>0: Disable<br>1: Enable<br>Bit[1]: White defect pixel cancellation enable<br>0: Disable<br>1: Enable<br>Bit[0]: LENC enable |

table 6-11 ISP\_top registers (sheet 2 of 3)

| address           | register name | default value | R/W | description                                                                                                                           |
|-------------------|---------------|---------------|-----|---------------------------------------------------------------------------------------------------------------------------------------|
| 0x5001            | R ISP CTRL1   | 0x01          | RW  | Bit[7:4]: Debug mode<br>Bit[3]: Digital gain enable<br>Bit[2]: Debug mode<br>Bit[1]: MWB enable<br>Bit[0]: BLC enable                 |
| 0x5002~<br>0x5004 | DEBUG MODE    | –             | –   | Debug Mode                                                                                                                            |
| 0x5005            | R ISP CTRL5   | 0x1C          | RW  | Bit[4]: MWB bias ON<br>This will subtract the BLC target before MWB gain and add the target back after MWB<br>0: Disable<br>1: Enable |
| 0x5006~<br>0x5055 | DEBUG MODE    | –             | –   | Debug Mode                                                                                                                            |
| 0x5056            | RED GAIN      | 0x04          | RW  | Bit[7:4]: Not used<br>Bit[3:0]: MWB red gain[11:8]<br>Digital gain in red channel<br>Red gain =<br>MWB red gain[11:0] / 0x400         |
| 0x5057            | RED GAIN      | 0x00          | RW  | Bit[7:0]: MWB red gain[7:0]<br>Digital gain in red channel<br>Red gain =<br>MWB red gain[11:0] / 0x400                                |
| 0x5058            | GRN GAIN      | 0x04          | RW  | Bit[7:4]: Not used<br>Bit[3:0]: MWB green gain[11:8]<br>Digital gain in green channel<br>Green gain =<br>MWB green gain[11:0] / 0x400 |
| 0x5059            | GRN GAIN      | 0x00          | RW  | Bit[7:0]: MWB green gain[7:0]<br>Digital gain in green channel<br>Green gain =<br>MWB green gain[11:0] / 0x400                        |
| 0x505A            | BLU GAIN      | 0x04          | RW  | Bit[7:4]: Not used<br>Bit[3:0]: MWB blue gain[11:8]<br>Digital gain in blue channel<br>Blue gain =<br>MWB blue gain[11:0] / 0x400     |
| 0x505B            | BLU GAIN      | 0x00          | RW  | Bit[7:0]: MWB blue gain[7:0]<br>Digital gain in blue channel<br>Blue gain =<br>MWB blue gain[11:0] / 0x400                            |

table 6-11 ISP\_top registers (sheet 3 of 3)

| address           | register name | default value | R/W | description                                                             |
|-------------------|---------------|---------------|-----|-------------------------------------------------------------------------|
| 0x505C~<br>0x505F | DEBUG MODE    | –             | –   | Debug Mode                                                              |
| 0x5060            | BIST CTRL1    | 0x09          | RW  | Bit[7:4]: Not used<br>Bit[3]: awb_done_vsync<br>Bit[2:0]: awb_done_mask |
| 0x5061~<br>0x5065 | DEBUG MODE    | –             | –   | Debug Mode                                                              |

## 6.12 digital gain [0x5500 - 0x550B]

table 6-12 digital gain registers

| address           | register name  | default value | R/W | description                                                                                                                                                                                            |
|-------------------|----------------|---------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x5500            | DIGG CTRL00    | 0x03          | RW  | Bit[7:5]: Not used<br>Bit[4]: Isb_replace_en<br>Replace the LSB of final output data with the LSB of input data<br>Bit[3:2]: Debug mode<br>Bit[1]: BLC bias switch<br>Bit[0]: Manual digital gain mode |
| 0x5502            | DIG GAIN L MAN | 0x01          | RW  | Bit[7:3]: Not used<br>Bit[2:0]: dig_gain_l_man[10:8]                                                                                                                                                   |
| 0x5503            | DIG GAIN L MAN | 0x00          | RW  | Bit[7:0]: dig_gain_l_man[7:0]                                                                                                                                                                          |
| 0x5504            | DIG GAIN S MAN | 0x01          | RW  | Bit[7:3]: Not used<br>Bit[2:0]: dig_gain_s_man[10:8]                                                                                                                                                   |
| 0x5505            | DIG GAIN S MAN | 0x00          | RW  | Bit[7:0]: dig_gain_s_man[7:0]                                                                                                                                                                          |
| 0x5508~<br>0x550B | DEBUG MODE     | –             | –   | Debug Mode                                                                                                                                                                                             |

### 6.13 illumination PWM [0x3B40 ~ 0x3B52]

table 6-13 illumination PWM registers (sheet 1 of 2)

| address | register name  | default value | R/W | description                                                                                       |
|---------|----------------|---------------|-----|---------------------------------------------------------------------------------------------------|
| 0x3B40  | PULSE1 DELAY   | 0x10          | RW  | First Pulse Delay (0 ~ 31)<br>0x00: -0.5 frame<br>0x1F: 0.5 frame                                 |
| 0x3B41  | PULSE2 DELAY   | 0x10          | RW  | Second Pulse Delay (0 ~ 31)<br>0x00: -0.5 frame<br>0x1F: 0.5 frame                                |
| 0x3B42  | PULSE3 DELAY   | 0x10          | RW  | Third Pulse Delay (0 ~ 31)<br>0x00: -0.5 frame<br>0x1F: 0.5 frame                                 |
| 0x3B43  | PULSE4 DELAY   | 0x10          | RW  | Fourth Pulse Delay (0 ~ 31)<br>0x00: -0.5 frame<br>0x1F: 0.5 frame                                |
| 0x3B44  | DURATION CTRL0 | 0x11          | RW  | Bit[7:4]: Second pulse duration (0 ~ 15 frames)<br>Bit[3:0]: First pulse duration (0 ~ 15 frames) |
| 0x3B45  | DURATION CTRL1 | 0x11          | RW  | Bit[7:4]: Fourth pulse duration (0 ~ 15 frames)<br>Bit[3:0]: Third pulse duration (0 ~ 15 frames) |
| 0x3B46  | PULSE1 DUTY    | 0x1F          | RW  | First Pulse Duty Cycle (0 ~ 31)                                                                   |
| 0x3B47  | PULSE2 DUTY    | 0x1F          | RW  | Second Pulse Duty Cycle (0 ~ 31)                                                                  |
| 0x3B48  | PULSE3 DUTY    | 0x1F          | RW  | Third Pulse Duty Cycle (0 ~ 31)                                                                   |
| 0x3B49  | PULSE4 DUTY    | 0x1F          | RW  | Fourth Pulse Duty Cycle (0 ~ 31)                                                                  |
| 0x3B4A  | GAP1           | 0x00          | RW  | Gap B/W Pulse 1 and Pulse 2 (0 ~ 255 Frames)                                                      |
| 0x3B4B  | GAP2           | 0x00          | RW  | Gap B/W Pulse 2 and Pulse 3 (0 ~ 255 Frames)                                                      |
| 0x3B4C  | GAP3           | 0x00          | RW  | Gap B/W Pulse 3 and Pulse 4 (0 ~ 255 Frames)                                                      |
| 0x3B4D  | GAP4           | 0x00          | RW  | Gap B/W Pulse 4 and Pulse 1 (0 ~ 255 Frames)                                                      |

table 6-13 illumination PWM registers (sheet 2 of 2)

| address | register name    | default value | R/W | description                                                                                                                                                                                                                     |
|---------|------------------|---------------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3B4E  | PWM CTRL         | 0x00          | RW  | Bit[7]: pwm_req_r (read only)<br>Bit[6]: dly_option<br>Bit[5]: illum_sel<br>Bit[4]: duty_no_map<br>Bit[3]: no_gap<br>Bit[2]: sel_slot_out<br>Bit[1]: Manually set duty cycle for duration1 and duration 3<br>Bit[0]: pwm_repeat |
| 0x3B4F  | SLOT WIDTH       | 0x02          | RW  | Slot Width                                                                                                                                                                                                                      |
| 0x3B50  | PULSE2 DUTY STEP | 0x01          | RW  | ramp2_xstep<br>Second Pulse Duty Cycle Step                                                                                                                                                                                     |
| 0x3B51  | PULSE4 DUTY STEP | 0x01          | RW  | ramp4_xstep<br>Fourth Pulse Duty Cycle Step                                                                                                                                                                                     |
| 0x3B52  | TAIL_DUTY_CYCLE  | 0x80          | RW  | Bit[7]: end_opt<br>0: No pulse when PWM end<br>1: Free running at pre-defined duty cycle<br>Bit[6]: tail_stop_toggle<br>Bit[4:0]: duty_tail<br>Tail pulse duty cycle step                                                       |

## 6.14 OTP [0x7000 - 0x73FF, 0x3D80 - 0x3D91]

table 6-14 OTP registers (sheet 1 of 3)

| address       | register name    | default value | R/W | description                                                                                                                      |
|---------------|------------------|---------------|-----|----------------------------------------------------------------------------------------------------------------------------------|
| 0x7000~0x73FF | OTP_SRAM         | 0x00          | RW  | Bit[7:0]: OTP buffer                                                                                                             |
| 0x3D80        | OTP PROGRAM CTRL | 0x00          | RW  | Bit[7]: otp_pgenb_o<br>1: Program on going<br>Bit[6:1]: Debug mode<br>Bit[0]: otp_pgm<br>To start program, write 0x1 to this bit |

table 6-14 OTP registers (sheet 2 of 3)

| address       | register name              | default value | R/W | description                                                                                                                                         |
|---------------|----------------------------|---------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x3D81        | OTP LOAD CTRL              | 0x00          | RW  | Bit[7]: opt_load_o<br>1: Load on going<br>Bit[6:4]: Debug mode<br>Bit[0]: otp_rd (write only)<br>Writing to this register will start data loading   |
| 0x3D82        | OTP PROGRAM PULSE          | 0xAA          | RW  | Bit[7:0]: Control program strobe pulse by 8*Tclk                                                                                                    |
| 0x3D83        | OTP LOAD PULSE             | 0x08          | RW  | Bit[7:4]: Debug mode<br>Bit[3:0]: Control load strobe pulse, by Tclk                                                                                |
| 0x3D84        | OPT MODE CTRL              | 0x80          | RW  | Bit[7]: program_dis<br>0: Enable<br>1: Disable<br>Bit[6]: mode_select<br>0: Auto mode<br>1: Manual mode<br>Bit[5:0]: manual_cs                      |
| 0x3D85        | OPT REG85                  | 0x13          | RW  | Bit[7:3]: Debug mode<br>Bit[2]: OTP powerup load data enable<br>Bit[1]: OTP powerup load setting enable<br>Bit[0]: OTP software load setting enable |
| 0x3D86        | OTP SRAM TEST SIGNALS      | 0x02          | RW  | Bit[7:6]: Debug mode<br>Bit[5]: r_rme<br>Bit[4]: r_test<br>Bit[3:0]: r_rm                                                                           |
| 0x3D87        | OTP PS2CS                  | 0x0A          | RW  | Bit[7:4]: Debug mode<br>Bit[3:0]: PS to CSB time control, by SCLK                                                                                   |
| 0x3D88        | OTP MANUAL START HIGH ADDR | 0x00          | RW  | Bit[7:0]: Start high address for manual mode                                                                                                        |
| 0x3D89        | OTP MANUAL START LOW ADDR  | 0x00          | RW  | Bit[7:0]: Start low address for manual mode                                                                                                         |
| 0x3D8A        | OTP MANUAL END HIGH ADDR   | 0x00          | RW  | Bit[7:0]: End high address for manual mode                                                                                                          |
| 0x3D8B        | OTP MANUAL END LOW ADDR    | 0x00          | RW  | Bit[7:0]: End low address for manual mode                                                                                                           |
| 0x3D8C        | OTP LOAD START HIGH ADDR   | 0x00          | RW  | Bit[7:0]: Start high address for load setting                                                                                                       |
| 0x3D8D        | OTP LOAD START LOW ADDR    | 0x00          | RW  | Bit[7:0]: Start low address for load setting                                                                                                        |
| 0x3D8E~0x3D8F | DEBUG MODE                 | –             | –   | Debug Mode                                                                                                                                          |

table 6-14 OTP registers (sheet 3 of 3)

| address | register name       | default value | R/W | description                                                    |
|---------|---------------------|---------------|-----|----------------------------------------------------------------|
| 0x3D90  | OTP STROBE GAP PGM  | 0x12          | RW  | Bit[7:0]: Gap between STROBE pulse when program                |
| 0x3D91  | OTP STROBE GAP LOAD | 0x06          | RW  | Bit[7:4]: Debug mode<br>Bit[3:0]: Gap between STROBE when load |

## 6.15 ADC sync [0x4500 - 0x4502]

table 6-15 ADC sync registers

| address           | register name | default value | R/W | description        |
|-------------------|---------------|---------------|-----|--------------------|
| 0x4500~<br>0x4502 | ADC SYNC      | –             | –   | ADC Sync Registers |

## 6.16 MIPI top [0x4800 - 0x4853]

table 6-16 MIPI top registers (sheet 1 of 9)

| address | register name | default value | R/W | description                                                                                                                                                                                                                                                                    |
|---------|---------------|---------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x4800  | MIPI CTRL00   | 0x04          | RW  | Bit[7:6]: Not used<br>Bit[5]: gate_sc_en<br>0: Clock lane is free running<br>1: Gate clock lane when there is no packet to transmit<br>Bit[4]: line_sync_en<br>0: Do not send line short packet for each line<br>1: Send line short packet for each line<br>Bit[2:0]: Not used |

table 6-16 MIPI top registers (sheet 2 of 9)

| address | register name | default value | R/W | description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------|---------------|---------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x4801  | MIPI CTRL01   | 0x00          | RW  | Bit[7]: Debug mode<br>Bit[6]: spkt_dt_sel<br>1: Use dt_spkt as short packet data<br>Bit[5]: first_bit<br>Change clk_lane first bit<br>0: Output 0x05<br>1: Output 0x0A<br>Bit[4:2]: Debug mode<br>Bit[1]: LPX_select for PCLK domain<br>0: Auto calculate t_lpx_p, unit pclk2x cycle<br>1: Use lpx_p_min[7:0]<br>Bit[0]: Not used                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 0x4802  | MIPI CTRL02   | 0x00          | RW  | Bit[7]: hs_prepare_sel<br>0: Auto calculate T_hs_prepare, unit pclk2x<br>1: Use hs_prepare_min_o[7:0]<br>Bit[6]: clk_prepare_sel<br>0: Auto calculate T_clk_prepare, unit pclk2x<br>1: Use clk_prepare_min_o[7:0]<br>Bit[5]: clk_post_sel<br>0: Auto calculate T_clk_post, unit pclk2x<br>1: Use clk_post_min_o[7:0]<br>Bit[4]: clk_trail_sel<br>0: Auto calculate T_clk_trail, unit pclk2x<br>1: Use clk_trail_min_o[7:0]<br>Bit[3]: hs_exit_sel<br>0: Auto calculate T_hs_exit, unit pclk2x<br>1: Use hs_exit_min_o[7:0]<br>Bit[2]: hs_zero_sel<br>0: Auto calculate T_hs_zero, unit pclk2x<br>1: Use hs_zero_min_o[7:0]<br>Bit[1]: hs_trail_sel<br>0: Auto calculate T_hs_trail, unit pclk2x<br>1: Use hs_trail_min_o[7:0]<br>Bit[0]: clk_zero_sel<br>0: Auto calculate T_clk_zero, unit pclk2x<br>1: Use clk_zero_min_o[7:0] |

table 6-16 MIPI top registers (sheet 3 of 9)

| address | register name | default value | R/W | description                                                                                                                                                                                                                                         |
|---------|---------------|---------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x4803  | MIPI CTRL03   | 0x00          | RW  | Bit[7:4]: Debug mode<br>Bit[3]: manu_offset_ot_perio<br>Manual offset SMIA<br>Bit[2]: r_manu_half2one<br>t_period half to 1 SMIA<br>Bit[1:0]: Not used<br>0: hs_pre_half<br>1: clk_pre_half                                                         |
| 0x4804  | MIPI CTRL04   | 0x04          | RW  | Bit[7:4]: man_lane_num<br>Bit[3]: lane_num_manual_enable<br>Bit[2]: lane4_6b_en1<br>Supports 4,7,8-lane 6-bit<br>Bit[1]: vsub select<br>0: Valid in behind<br>1: Valid in front<br>Bit[0]: Not used<br>Input data valid<br>0: Valid=8<br>1: Valid=4 |
| 0x4805  | MIPI CTRL05   | 0x00          | RW  | Bit[7:4]: Debug mode<br>Bit[3]: lpda_retim_manu_o<br>Bit[2]: lpda_retim_sel_o<br>1: Manual<br>Bit[1]: lpck_retim_manu_o<br>Bit[0]: lpck_retim_sel_o<br>1: Manual                                                                                    |
| 0x4806  | MIPI CTRL06   | 0x00          | RW  | Bit[7:5]: Debug mode<br>Bit[4]: pu_mark_en_o<br>Power up mark1 enable<br>Bit[3]: mipi_remot_rst<br>Bit[2]: mipi_susp<br>Bit[1]: smia_lane_ch_en<br>Bit[0]: tx_lsb_first<br>0: Transmit high bit first<br>1: Low power transmit low bit first        |
| 0x4807  | DEBUG MODE    | –             | –   | Debug Mode                                                                                                                                                                                                                                          |
| 0x4808  | MIPI CTRL08   | 0x0A          | RW  | Bit[7:0]: wkup_dly<br>Mark1 wakeup delay/2^10                                                                                                                                                                                                       |
| 0x4810  | FCNT MAX      | 0xFF          | RW  | Bit[7:0]: fcnt_max[15:8]<br>High byte of max frame counter of<br>frame sync short packet                                                                                                                                                            |
| 0x4811  | FCNT MAX      | 0xFF          | RW  | Bit[7:0]: fcnt_max[7:0]<br>Low byte of max frame counter of<br>frame sync short packet                                                                                                                                                              |

table 6-16 MIPI top registers (sheet 4 of 9)

| address | register name | default value | R/W | description                                                                                                                                                                                                                              |
|---------|---------------|---------------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x4813  | MIPI CTRL13   | 0x00          | RW  | Bit[7:3]: Debug mode<br>Bit[2]: vc_sel<br>Input VC or register VC<br>Bit[1:0]: VC<br>Virtual channel of MIPI                                                                                                                             |
| 0x4814  | MIPI CTRL14   | 0x2A          | RW  | Bit[7]: Debug mode<br>Bit[6]: lpkt_dt_sel<br>0: Use mipi_dt<br>1: Use dt_man_o as long packet data<br>Bit[5:0]: dt_man<br>Manual data type                                                                                               |
| 0x4815  | MIPI CTRL15   | 0x00          | RW  | Bit[7]: Debug mode<br>Bit[6]: pclk_inv<br>0: Using falling edge of mipi_pclk_o to generate MIPI bus to PHY<br>1: Using rising edge of mipi_pclk_o to generate MIPI bus to PHY<br>Bit[5:0]: manu_dt_short<br>Manual type for short packet |
| 0x4816  | EMB DT        | 0x52          | RW  | Bit[7:6]: Debug mode<br>Bit[5:0]: emb_dt<br>Manual set embedded data type                                                                                                                                                                |
| 0x4817  | DEBUG MODE    | –             | –   | Debug Mode                                                                                                                                                                                                                               |
| 0x4818  | HS ZERO MIN   | 0x00          | RW  | Bit[7:2]: Debug mode<br>Bit[1:0]: hs_zero_min[9:8]<br>High byte of minimum value of hs_zero<br>Unit ns                                                                                                                                   |
| 0x4819  | HS ZERO MIN   | 0x70          | RW  | Bit[7:0]: hs_zero_min[7:0]<br>Low byte of minimum value of hs_zero<br>$hs\_zero\_real = hs\_zero\_min\_o + Tui * ui\_hs\_zero\_min\_o$                                                                                                   |
| 0x481A  | HS TRAIL MIN  | 0x00          | RW  | Bit[7:2]: Not used<br>Bit[1:0]: hs_trail_min[9:8]<br>High byte of minimum value of hs_trail, unit ns                                                                                                                                     |
| 0x481B  | HS TRAIL MIN  | 0x3C          | RW  | Bit[7:0]: hs_trail_min[7:0]<br>Low byte of minimum value of hs_trail<br>$hs\_trail\_real = hs\_trail\_min\_o + Tui * ui\_hs\_trail\_min\_o$                                                                                              |

table 6-16 MIPI top registers (sheet 5 of 9)

| address | register name   | default value | R/W | description                                                                                                                                                         |
|---------|-----------------|---------------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x481C  | CLK ZERO MIN    | 0x01          | RW  | Bit[7:2]: Debug mode<br>Bit[1:0]: clk_zero_min[9:8]<br>High byte of minimum value of clk_zero, unit ns                                                              |
| 0x481D  | CLK ZERO MIN    | 0x2C          | RW  | Bit[7:0]: clk_zero_min[7:0]<br>Low byte of minimum value of clk_zero<br>$\text{clk\_zero\_real} = \text{clk\_zero\_min\_o} + \text{Tui*ui\_clk\_zero\_min\_o}$      |
| 0x481E  | CLK PREPARE MAX | 0x5F          | RW  | Bit[7:0]: clk_prepare_max[7:0]<br>Maximum value of clk_prepare, unit ns                                                                                             |
| 0x481F  | CLK PREPARE MIN | 0x26          | RW  | Bit[7:0]: clk_prepare_min[7:0]<br>Minimum value of clk_prepare<br>$\text{clk\_prepare\_real} = \text{clk\_prepare\_min\_o} + \text{Tui*ui\_clk\_prepare\_min\_o}$   |
| 0x4820  | CLK POST MIN    | 0x00          | RW  | Bit[7:2]: Debug mode<br>Bit[1:0]: clk_post_min[9:8]<br>High byte of minimum value of clk_post, unit ns                                                              |
| 0x4821  | CLK POST MIN    | 0x3C          | RW  | Bit[7:0]: clk_post_min[7:0]<br>Low byte of minimum value of clk_post<br>$\text{clk\_post\_real} = \text{clk\_post\_min\_o} + \text{Tui*ui\_clk\_post\_min\_o}$      |
| 0x4822  | CLK TRAIL MIN   | 0x00          | RW  | Bit[7:2]: Debug mode<br>Bit[1:0]: clk_trail_min[9:8]<br>High byte of minimum value of clk_trail, unit ns                                                            |
| 0x4823  | CLK TRAIL MIN   | 0x3C          | RW  | Bit[7:0]: clk_trail_min[7:0]<br>Low byte of minimum value of clk_trail<br>$\text{clk\_trail\_real} = \text{clk\_trail\_min\_o} + \text{Tui*ui\_clk\_trail\_min\_o}$ |
| 0x4824  | LPX P MIN       | 0x00          | RW  | Bit[7:2]: Debug mode<br>Bit[1:0]: lpx_p_min[9:8]<br>High byte of minimum value of lpx_p, unit ns                                                                    |
| 0x4825  | LPX P MIN       | 0x32          | RW  | Bit[7:0]: lpx_p_min[7:0]<br>Low byte of minimum value of lpx_p<br>$\text{lpx\_p\_real} = \text{lpx\_p\_min\_o} + \text{Tui*ui\_lpx\_p\_min\_o}$                     |

table 6-16 MIPI top registers (sheet 6 of 9)

| address | register name    | default value | R/W | description                                                                                                                                          |
|---------|------------------|---------------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x4826  | HS PREPARE MIN   | 0x32          | RW  | Bit[7:0]: hs_prepare_min[7:0]<br>Minimum value of hs_prepare, unit ns                                                                                |
| 0x4827  | HS PREPARE MAX   | 0x55          | RW  | Bit[7:0]: hs_prepare_max[7:0]<br>Maximum value of hs_prepare<br>$hs\_prepare\_real = hs\_prepare\_max\_o + T_{ui} * ui\_hs\_prepare\_max\_o$         |
| 0x4828  | HS EXIT MIN      | 0x00          | RW  | Bit[7:2]: Debug mode<br>Bit[1:0]: hs_exit_min[9:8]<br>High byte of minimum value of hs_exit, unit ns                                                 |
| 0x4829  | HS EXIT MIN      | 0x64          | RW  | Bit[7:0]: hs_exit_min[7:0]<br>Low byte of minimum value of hs_exit<br>$hs\_exit\_real = hs\_exit\_min\_o + T_{ui} * ui\_hs\_exit\_min\_o$            |
| 0x482A  | UI HS ZERO MIN   | 0x06          | RW  | Bit[7:6]: Debug mode<br>Bit[5:0]: ui_hs_zero_min[5:0]<br>Minimum UI value of hs_zero, unit UI                                                        |
| 0x482B  | UI HS TRAIL MIN  | 0x04          | RW  | Bit[7:6]: Debug mode<br>Bit[5:0]: ui_hs_trail_min[5:0]<br>Minimum UI value of hs_trail, unit UI                                                      |
| 0x482C  | UI CLK ZERO MIN  | 0x00          | RW  | Bit[7:6]: Debug mode<br>Bit[5:0]: ui_clk_zero_min[5:0]<br>Minimum UI value of clk_zero, unit UI                                                      |
| 0x482D  | UI CLK PREPARE   | 0x00          | RW  | Bit[7:4]: ui_clk_prepare_max<br>Maximum UI value of clk_prepare, unit UI<br>Bit[3:0]: ui_clk_prepare_min<br>Minimum UI value of clk_prepare, unit UI |
| 0x482E  | UI CLK POST MIN  | 0x34          | RW  | Bit[7:6]: Debug mode<br>Bit[5:0]: ui_clk_post_min[5:0]<br>Minimum UI value of clk_post, unit UI                                                      |
| 0x482F  | UI CLK TRAIL MIN | 0x00          | RW  | Bit[7:6]: Debug mode<br>Bit[5:0]: ui_clk_trail_min[5:0]<br>Minimum UI value of clk_trail, unit UI                                                    |

table 6-16 MIPI top registers (sheet 7 of 9)

| address | register name  | default value | R/W | description                                                                                                                                                                                                                                                                                                                                                                |
|---------|----------------|---------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x4830  | UI LPX P MIN   | 0x00          | RW  | Bit[7:6]: Debug mode<br>Bit[5:0]: ui_lpx_p_min[5:0]<br>Minimum UI value of lpx_p (pclk2x domain), unit UI                                                                                                                                                                                                                                                                  |
| 0x4831  | UI HS PREPARE  | 0x64          | RW  | Bit[7:4]: ui_hs_prepare_max<br>Maximum UI value of hs_prepare, unit UI<br>Bit[3:0]: ui_hs_prepare_min<br>Minimum UI value of hs_prepare, unit UI                                                                                                                                                                                                                           |
| 0x4832  | UI HS EXIT MIN | 0x00          | RW  | Bit[7:6]: Debug mode<br>Bit[5:0]: ui_hs_exit_min[5:0]<br>Minimum UI value of hs_exit, unit UI                                                                                                                                                                                                                                                                              |
| 0x4833  | CTRL51         | 0x18          | RW  | Bit[7:6]: Debug mode<br>Bit[5:0]: mipi_pkt_star_size                                                                                                                                                                                                                                                                                                                       |
| 0x4836  | GLB MODE SEL   | 0x00          | RW  | Bit[7:1]: Debug mode<br>Bit[0]: smia_cal_en<br>0: Use period to calculate<br>1: Use SMIA bitrate to calculate                                                                                                                                                                                                                                                              |
| 0x4837  | PCLK PERIOD    | 0x0A          | RW  | Bit[7:0]: pclk_period[7:0]<br>Period of pclk2x pclk_div=1, and 1-bit decimal                                                                                                                                                                                                                                                                                               |
| 0x4838  | MIPI LP GPIO0  | 0x00          | RW  | Bit[7]: lp_sel0<br>0: Auto generate mipi_lp_dir0_o<br>1: Use lp_dir_man0 to be mipi_lp_dir0_o<br>Bit[6]: lp_dir_man0<br>0: Input<br>1: Output<br>Bit[5]: lp_p0_o<br>Bit[4]: lp_n0_o<br>Bit[3]: lp_sel1<br>0: Auto generate mipi_lp_dir1_o<br>1: Use lp_dir_man1 to be mipi_lp_dir1_o<br>Bit[2]: lp_dir_man1<br>0: Input<br>1: Output<br>Bit[1]: lp_p1_o<br>Bit[0]: lp_n1_o |

table 6-16 MIPI top registers (sheet 8 of 9)

| address       | register name | default value | R/W | description                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------|---------------|---------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x4839        | MIPI LP GPIO1 | 0x00          | RW  | Bit[7]: lp_sel2<br>0: Auto generate mipi_lp_dir2_o<br>1: Use lp_dir_man2 to be mipi_lp_dir2_o<br>Bit[6]: lp_dir_man2<br>0: Input<br>1: Output<br>Bit[5]: lp_p2_o<br>Bit[4]: lp_n2_o<br>Bit[3]: lp_sel3<br>0: Auto generate mipi_lp_dir3_o<br>1: Use lp_dir_man3 to be mipi_lp_dir3_o<br>Bit[2]: lp_dir_man3<br>0: Input<br>1: Output<br>Bit[1]: lp_p3_o<br>Bit[0]: lp_n3_o                                           |
| 0x483A~0x483B | DEBUG MODE    | –             | –   | Debug Mode                                                                                                                                                                                                                                                                                                                                                                                                           |
| 0x483C        | MIPI CTRL3C   | 0x02          | RW  | Bit[7:4]: Debug mode<br>Bit[3:0]: t_clk_pre<br>Unit pclk2x cycle                                                                                                                                                                                                                                                                                                                                                     |
| 0x483D        | MIPI LP GPIO4 | 0x00          | RW  | Bit[7]: lp_ck_sel0<br>0: Auto generate mipi_ck_lp_dir0_o<br>1: Use lp_ck_dir_man0 to be mipi_ck_lp_dir0_o<br>Bit[6]: lp_ck_dir_man0<br>0: Input<br>1: Output<br>Bit[5]: lp_ck_p0_o<br>Bit[4]: lp_ck_n0_o<br>Bit[3]: lp_ck_sel1<br>0: Auto generate mipi_ck_lp_dir1_o<br>1: Use lp_ck_dir_man1 to be mipi_ck_lp_dir1_o<br>Bit[2]: lp_ck_dir_man1<br>0: Input<br>1: Output<br>Bit[1]: lp_ck_p1_o<br>Bit[0]: lp_ck_n1_o |

table 6-16 MIPI top registers (sheet 9 of 9)

| address | register name       | default value | R/W | description                                                                                                                                                                                                                                                                                   |
|---------|---------------------|---------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x484A  | SEL MIPI CTRL4A     | 0x3F          | RW  | Bit[7:6]: Debug mode<br>Bit[5]: slp_lp_pon_man_o<br>Set for power up<br>Bit[4]: slp_lp_pon_da<br>Bit[3]: slp_lp_pon_ck<br>Bit[2]: mipi_slp_man_st<br>MIPI bus status manual control<br>enable in sleep mode<br>Bit[1]: clk_lane_state<br>Bit[0]: data_lane_state                              |
| 0x484B  | SMIA OPTION         | 0x07          | RW  | Bit[7:3]: Debug mode<br>Bit[2]: line_st_sel_o<br>0: Line starts after HREF<br>1: Line starts after fifo_st<br>Bit[1]: clk_start_sel_o<br>0: Clock starts after SOF<br>1: Clock start after reset<br>Bit[0]: sof_sel_o<br>0: Frame starts after HREF come<br>temp<br>1: Frame starts after SOF |
| 0x484C  | SEL MIPI CTRL4C     | 0x03          | RW  | Bit[7]: Debug mode<br>Bit[6]: smia_fcnt_i select<br>Bit[5]: prbs_enable<br>Bit[4]: hs_test_only<br>MIPI high speed only test mode<br>enable<br>Bit[3]: set_frame_cnt_0<br>Set frame count to inactive mode<br>(keep 0)<br>Bit[2:0]: Debug mode                                                |
| 0x484D  | TEST PATTEN DATA    | 0xB6          | RW  | Bit[7:0]: test_patten_data[7:0]<br>Data lane test pattern register                                                                                                                                                                                                                            |
| 0x484E  | FE DLY              | 0x10          | RW  | Bit[7:0]: r_fe_dly_o<br>Last packet to frame end delay / 2                                                                                                                                                                                                                                    |
| 0x484F  | TEST PATTEN CK DATA | 0x55          | RW  | Bit[7:0]: clk_test_patten_reg                                                                                                                                                                                                                                                                 |
| 0x4850  | FCNT                | –             | R   | Bit[7:0]: fcnt[15:8]                                                                                                                                                                                                                                                                          |
| 0x4851  | FCNT                | –             | R   | Bit[7:0]: fcnt[7:0]                                                                                                                                                                                                                                                                           |
| 0x4852  | LCNT                | –             | R   | Bit[7:0]: lcnt[15:8]                                                                                                                                                                                                                                                                          |
| 0x4853  | LCNT                | –             | R   | Bit[7:0]: lcnt[7:0]                                                                                                                                                                                                                                                                           |

## 6.17 LVDS interface [0x4A00 ~ 0x4A0F]

table 6-17 LVDS interface registers (sheet 1 of 2)

| address | register name    | default value | R/W | description                                                                                                                                                                                                                                                                                                      |
|---------|------------------|---------------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x4A00  | LVDS R0          | 0x2A          | RW  | Bit[7]: Two sync code enable in lane8 mode<br>Bit[6]: Sync code manual mode enable<br>Bit[5]: Sync code enable when only 1 lane<br>Bit[4]: lvds_pclk_inv<br>Bit[3]: Channel ID enable in sync per lane mode<br>Bit[2]: f value<br>Bit[1]: Save first enable<br>Bit[0]: sync code mode<br>0: Split<br>1: Per lane |
| 0x4A02  | LVDS DUMMY DATA0 | 0x0           | RW  | Bit[7:0]: lvds_dummy_data0[11:8]<br>Dummy data0                                                                                                                                                                                                                                                                  |
| 0x4A03  | LVDS DUMMY DATA0 | 0x80          | RW  | Bit[7:0]: lvds_dummy_data0[7:0]<br>Dummy data0                                                                                                                                                                                                                                                                   |
| 0x4A04  | LVDS DUMMY DATA1 | 0x00          | RW  | Bit[7:0]: lvds_dummy_data1[11:8]<br>Dummy data1                                                                                                                                                                                                                                                                  |
| 0x4A05  | LVDS DUMMY DATA1 | 0x10          | RW  | Bit[7:0]: lvds_dummy_data1[7:0]<br>Dummy data1                                                                                                                                                                                                                                                                   |
| 0x4A06  | LVDS R6          | 0xAA          | RW  | Bit[7:0]: lvds_r6<br>frame_start sync code in manual sync code mode                                                                                                                                                                                                                                              |
| 0x4A07  | LVDS R7          | 0x55          | RW  | Bit[7:0]: lvds_r7<br>frame_end sync code in manual sync code mode                                                                                                                                                                                                                                                |
| 0x4A08  | LVDS R8          | 0x99          | RW  | Bit[7:0]: lvds_r8<br>line_start sync code in manual sync code mode                                                                                                                                                                                                                                               |
| 0x4A09  | LVDS R9          | 0x66          | RW  | Bit[7:0]: lvds_r9<br>line_end sync code in manual sync code mode                                                                                                                                                                                                                                                 |
| 0x4A0A  | LVDS RA          | 0x08          | RW  | Bit[7:3]: Debug mode<br>Bit[2]: r_hts_man_en<br>Bit[1]: r_ln2_sel<br>Bit[0]: r_chk_pcnt                                                                                                                                                                                                                          |

**table 6-17** LVDS interface registers (sheet 2 of 2)

| address | register name   | default value | R/W | description                                                      |
|---------|-----------------|---------------|-----|------------------------------------------------------------------|
| 0x4A0B  | LVDS SLEEP CTRL | 0x88          | RW  | Bit[7]: sleep_en<br>Bit[4]: frame_rst_en<br>Bit[3:0]: ln_end_dly |
| 0x4A0C  | LVDS BLK TIMES  | 0x00          | RW  | Bit[7:4]: Debug mode<br>Bit[3:0]: lvds_blk_times[11:8]           |
| 0x4A0D  | LVDS BLK TIMES  | 0x02          | RW  | Bit[7:0]: lvds_blk_times[7:0]                                    |
| 0x4A0E  | LVDS HTS MAN    | 0x00          | RW  | Bit[7:0]: lvds_hts_man[15:8]                                     |
| 0x4A0F  | LVDS HTS MAN    | 0x00          | RW  | Bit[7:0]: lvds_hts_man[7:0]                                      |

## 6.18 temperature monitor [0x4D00 - 0x4D13]

**table 6-18** temperature monitor registers

| address           | register name | default value | R/W | description                                                |
|-------------------|---------------|---------------|-----|------------------------------------------------------------|
| 0x4D00~<br>0x4D11 | DEBUG MODE    | —             | —   | Debug Mode                                                 |
| 0x4D12            | TPM TRIGGER   | 0x00          | RW  | Bit[7:1]: Debug mode<br>Bit[0]: Temperature sensor trigger |
| 0x4D13            | TPM READ      | —             | R   | Bit[7:0]: Temperature readout                              |

## 6.19 LENC [0x5200 - 0x5256]

**table 6-19** LENC registers (sheet 1 of 6)

| address | register name | default value | R/W | description                                            |
|---------|---------------|---------------|-----|--------------------------------------------------------|
| 0x5200  | LENC G00      | 0x10          | RW  | Bit[7:0]: Control point G00 for luminance compensation |
| 0x5201  | LENC G01      | 0x10          | RW  | Bit[7:0]: Control point G01 for luminance compensation |
| 0x5202  | LENC G02      | 0x10          | RW  | Bit[7:0]: Control point G02 for luminance compensation |

table 6-19 LENC registers (sheet 2 of 6)

| address | register name | default value | R/W | description                                            |
|---------|---------------|---------------|-----|--------------------------------------------------------|
| 0x5203  | LENC G03      | 0x10          | RW  | Bit[7:0]: Control point G03 for luminance compensation |
| 0x5204  | LENC G04      | 0x10          | RW  | Bit[7:0]: Control point G04 for luminance compensation |
| 0x5205  | LENC G05      | 0x10          | RW  | Bit[7:0]: Control point G05 for luminance compensation |
| 0x5206  | LENC G10      | 0x10          | RW  | Bit[7:0]: Control point G10 for luminance compensation |
| 0x5207  | LENC G11      | 0x08          | RW  | Bit[7:0]: Control point G11 for luminance compensation |
| 0x5208  | LENC G12      | 0x08          | RW  | Bit[7:0]: Control point G12 for luminance compensation |
| 0x5209  | LENC G13      | 0x08          | RW  | Bit[7:0]: Control point G13 for luminance compensation |
| 0x520A  | LENC G14      | 0x08          | RW  | Bit[7:0]: Control point G14 for luminance compensation |
| 0x520B  | LENC G15      | 0x10          | RW  | Bit[7:0]: Control point G15 for luminance compensation |
| 0x520C  | LENC G20      | 0x10          | RW  | Bit[7:0]: Control point G20 for luminance compensation |
| 0x520D  | LENC G21      | 0x08          | RW  | Bit[7:0]: Control point G21 for luminance compensation |
| 0x520E  | LENC G22      | 0x00          | RW  | Bit[7:0]: Control point G22 for luminance compensation |
| 0x520F  | LENC G23      | 0x00          | RW  | Bit[7:0]: Control point G23 for luminance compensation |
| 0x5210  | LENC G24      | 0x08          | RW  | Bit[7:0]: Control point G24 for luminance compensation |
| 0x5211  | LENC G25      | 0x10          | RW  | Bit[7:0]: Control point G25 for luminance compensation |
| 0x5212  | LENC G30      | 0x10          | RW  | Bit[7:0]: Control point G30 for luminance compensation |
| 0x5213  | LENC G31      | 0x08          | RW  | Bit[7:0]: Control point G31 for luminance compensation |
| 0x5214  | LENC G32      | 0x00          | RW  | Bit[7:0]: Control point G32 for luminance compensation |
| 0x5215  | LENC G33      | 0x00          | RW  | Bit[7:0]: Control point G33 for luminance compensation |

table 6-19 LENC registers (sheet 3 of 6)

| address | register name | default value | R/W | description                                                                                                           |
|---------|---------------|---------------|-----|-----------------------------------------------------------------------------------------------------------------------|
| 0x5216  | LENC G34      | 0x08          | RW  | Bit[7:0]: Control point G34 for luminance compensation                                                                |
| 0x5217  | LENC G35      | 0x10          | RW  | Bit[7:0]: Control point G35 for luminance compensation                                                                |
| 0x5218  | LENC G40      | 0x10          | RW  | Bit[7:0]: Control point G40 for luminance compensation                                                                |
| 0x5219  | LENC G41      | 0x08          | RW  | Bit[7:0]: Control point G41 for luminance compensation                                                                |
| 0x521A  | LENC G42      | 0x08          | RW  | Bit[7:0]: Control point G42 for luminance compensation                                                                |
| 0x521B  | LENC G43      | 0x08          | RW  | Bit[7:0]: Control point G43 for luminance compensation                                                                |
| 0x521C  | LENC G44      | 0x08          | RW  | Bit[7:0]: Control point G44 for luminance compensation                                                                |
| 0x521D  | LENC G45      | 0x10          | RW  | Bit[7:0]: Control point G45 for luminance compensation                                                                |
| 0x521E  | LENC G50      | 0x10          | RW  | Bit[7:0]: Control point G50 for luminance compensation                                                                |
| 0x521F  | LENC G51      | 0x10          | RW  | Bit[7:0]: Control point G51 for luminance compensation                                                                |
| 0x5220  | LENC G52      | 0x10          | RW  | Bit[7:0]: Control point G52 for luminance compensation                                                                |
| 0x5221  | LENC G53      | 0x10          | RW  | Bit[7:0]: Control point G53 for luminance compensation                                                                |
| 0x5222  | LENC G54      | 0x10          | RW  | Bit[7:0]: Control point G54 for luminance compensation                                                                |
| 0x5223  | LENC G55      | 0x10          | RW  | Bit[7:0]: Control point G55 for luminance compensation                                                                |
| 0x5224  | LENC BR00     | 0xAA          | RW  | Bit[7:4]: Control point B00 for blue channel compensation<br>Bit[3:0]: Control point R00 for red channel compensation |
| 0x5225  | LENC BR01     | 0xAA          | RW  | Bit[7:4]: Control point B01 for blue channel compensation<br>Bit[3:0]: Control point R01 for red channel compensation |

table 6-19 LENC registers (sheet 4 of 6)

| address | register name | default value | R/W | description                                                                                                             |
|---------|---------------|---------------|-----|-------------------------------------------------------------------------------------------------------------------------|
| 0x5226  | LENC BR02     | 0xAA          | RW  | Bit[7:4]: Control point B02 for blue channel compensation<br>Bit[3:0]: Control point R02 for red channel compensation   |
| 0x5227  | LENC BR03     | 0xAA          | RW  | Bit[7:4]: Control point B03 for blue channel compensation<br>Bit[3:0]: Control point R03 for red channel compensation   |
| 0x5228  | LENC BR04     | 0xAA          | RW  | Bit[7:4]: Control point B04 for blue channel compensation<br>Bit[3:0]: Control point R04 for red channel compensation   |
| 0x5229  | LENC BR10     | 0xAA          | RW  | Bit[7:4]: Control point B10 for blue channels compensation<br>Bit[3:0]: Control point R10 for red channels compensation |
| 0x522A  | LENC BR11     | 0x99          | RW  | Bit[7:4]: Control point B11 for blue channels compensation<br>Bit[3:0]: Control point R11 for red channels compensation |
| 0x522B  | LENC BR12     | 0x99          | RW  | Bit[7:4]: Control point B12 for blue channels compensation<br>Bit[3:0]: Control point R12 for red channels compensation |
| 0x522C  | LENC BR13     | 0x99          | RW  | Bit[7:4]: Control point B13 for blue channels compensation<br>Bit[3:0]: Control point R13 for red channels compensation |
| 0x522D  | LENC BR14     | 0xAA          | RW  | Bit[7:4]: Control point B14 for blue channels compensation<br>Bit[3:0]: Control point R14 for red channels compensation |
| 0x522E  | LENC BR20     | 0xAA          | RW  | Bit[7:4]: Control point B20 for blue channels compensation<br>Bit[3:0]: Control point R20 for red channels compensation |
| 0x522F  | LENC BR21     | 0x99          | RW  | Bit[7:4]: Control point B21 for blue channels compensation<br>Bit[3:0]: Control point R21 for red channels compensation |

table 6-19 LENC registers (sheet 5 of 6)

| address | register name | default value | R/W | description                                                                                                             |
|---------|---------------|---------------|-----|-------------------------------------------------------------------------------------------------------------------------|
| 0x5230  | LENC BR22     | 0x88          | RW  | Bit[7:4]: Control point B22 for blue channels compensation<br>Bit[3:0]: Control point R22 for red channels compensation |
| 0x5231  | LENC BR23     | 0x99          | RW  | Bit[7:4]: Control point B23 for blue channels compensation<br>Bit[3:0]: Control point R23 for red channels compensation |
| 0x5232  | LENC BR24     | 0xAA          | RW  | Bit[7:4]: Control point B24 for blue channels compensation<br>Bit[3:0]: Control point R24 for red channels compensation |
| 0x5233  | LENC BR30     | 0xAA          | RW  | Bit[7:4]: Control point B30 for blue channels compensation<br>Bit[3:0]: Control point R30 for red channels compensation |
| 0x5234  | LENC BR31     | 0x99          | RW  | Bit[7:4]: Control point B31 for blue channels compensation<br>Bit[3:0]: Control point R31 for red channels compensation |
| 0x5235  | LENC BR32     | 0x99          | RW  | Bit[7:4]: Control point B32 for blue channels compensation<br>Bit[3:0]: Control point R32 for red channels compensation |
| 0x5236  | LENC BR33     | 0x99          | RW  | Bit[7:4]: Control point B33 for blue channels compensation<br>Bit[3:0]: Control point R33 for red channels compensation |
| 0x5237  | LENC BR34     | 0xAA          | RW  | Bit[7:4]: Control point B34 for blue channels compensation<br>Bit[3:0]: Control point R34 for red channels compensation |
| 0x5238  | LENC BR40     | 0xAA          | RW  | Bit[7:4]: Control point B40 for blue channels compensation<br>Bit[3:0]: Control point R40 for red channels compensation |
| 0x5239  | LENC BR41     | 0xAA          | RW  | Bit[7:4]: Control point B41 for blue channels compensation<br>Bit[3:0]: Control point R41 for red channels compensation |

table 6-19 LENC registers (sheet 6 of 6)

| address | register name  | default value | R/W | description                                                                                                                                                                                                                         |
|---------|----------------|---------------|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x523A  | LENC BR42      | 0xAA          | RW  | Bit[7:4]: Control point B42 for blue channels compensation<br>Bit[3:0]: Control point R4 for red channels compensation                                                                                                              |
| 0x523B  | LENC BR43      | 0xAA          | RW  | Bit[7:4]: Control point B43 for blue channels compensation<br>Bit[3:0]: Control point R43 for red channels compensation                                                                                                             |
| 0x523C  | LENC BR44      | 0xAA          | RW  | Bit[7:4]: Control point B44 for blue channels compensation<br>Bit[3:0]: Control point R44 for red channels compensation                                                                                                             |
| 0x523D  | LENC BR OFFSET | 0x88          | RW  | Bit[7:4]: Base value for all blue channel control points<br>Bit[3:0]: Base value for all red channel control points                                                                                                                 |
| 0x523E  | MAXGAIN        | 0x40          | RW  | Bit[7:0]: If AutoLensSwitchEnable is true and sensor gain is larger than this threshold, luminance compensation amplitude will be the minimum value (min LENC gain). Register value is 16 times sensor gain.                        |
| 0x523F  | MINGAIN        | 0x20          | RW  | Bit[7:0]: If AutoLensSwitchEnable is true and sensor gain is larger than this threshold, luminance compensation amplitude will start to decrease; otherwise, the amplitude will not change. Register value is 16 times sensor gain. |
| 0x5240  | MINQ           | 0x18          | RW  | Bit[7]: Debug mode<br>Bit[6:0]: This value indicates the minimum amplitude which luminance channel compensates when AutoLensSwitchEnable is true. Value should be in the range [0~64]                                               |

## 6.20 test mode [0x3E00 - 0x3E13]

**table 6-20** test mode registers

| address           | register name | default value | R/W | description         |
|-------------------|---------------|---------------|-----|---------------------|
| 0x3E00~<br>0x3E13 | TEST MODE     | –             | –   | Test Mode Registers |

## 6.21 test mode [0x4300 - 0x430D]

**table 6-21** test mode registers

| address           | register name | default value | R/W | description         |
|-------------------|---------------|---------------|-----|---------------------|
| 0x4300~<br>0x430D | TEST MODE     | –             | –   | Test Mode Registers |

## 6.22 ISPFC [0x4240 - 0x4243]

**table 6-22** ISPFC registers

| address | register name    | default value | R/W | description                                                                                                                                                              |
|---------|------------------|---------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x4240  | FRAME CTRL0      | 0x00          | RW  | Bit[7:3]: Debug mode<br>Bit[2]: fcnt_eof_sel<br>Bit[1]: fcnt_mask_dis<br>Bit[0]: fcnt_reset                                                                              |
| 0x4241  | FRAME ON NUMBER  | 0x00          | RW  | Bit[7:4]: Debug mode<br>Bit[3:0]: Frame on number                                                                                                                        |
| 0x4242  | FRAME OFF NUMBER | 0x00          | RW  | Bit[7:4]: Debug mode<br>Bit[3:0]: Frame off number                                                                                                                       |
| 0x4243  | FRAME CTRL1      | 0x00          | RW  | Bit[7:6]: Debug mode<br>Bit[5]: data_mask_dis<br>Bit[4]: valid_mask_dis<br>Bit[3]: href_mask_dis<br>Bit[2]: eof_mask_dis<br>Bit[1]: sof_mask_dis<br>Bit[0]: all_mask_dis |

## 6.23 VFIFO [0x4600 - 0x4604]

table 6-23 VFIFO registers

| address | register name      | default value | R/W | description                                                                                                      |
|---------|--------------------|---------------|-----|------------------------------------------------------------------------------------------------------------------|
| 0x4600  | R VFIFO READ START | 0x00          | RW  | Bit[7:0]: r_vfifo_read_start[15:8]<br>read_start size                                                            |
| 0x4601  | R VFIFO READ START | 0x04          | RW  | Bit[7:0]: r_vfifo_read_start[7:0]<br>read_start size                                                             |
| 0x4602  | R2                 | 0x20          | RW  | Bit[7:4]: r_rm<br>Bit[3]: r_test1<br>Bit[2]: Not used<br>Bit[1]: Frame reset enable<br>Bit[0]: RAM bypass enable |
| 0x4603  | R3                 | 0x00          | RW  | Bit[7:2]: Debug mode<br>Bit[1]: sram_rme<br>Bit[0]: man_start_mode                                               |
| 0x4604  | R4                 | –             | R   | Bit[7:2]: Debug mode<br>Bit[3]: ram_full<br>Bit[2]: ram_empty<br>Bit[1]: fo_full<br>Bit[0]: fo_empty             |

## 6.24 ISP window [0x5A00 - 0x5A0C]

table 6-24 ISP window registers (sheet 1 of 2)

| address | register name | default value | R/W | description                                                                |
|---------|---------------|---------------|-----|----------------------------------------------------------------------------|
| 0x5A00  | XSTART        | 0x00          | RW  | Bit[7:4]: Debug mode<br>Bit[3:0]: xstart[11:8]<br>Horizontal start address |
| 0x5A01  | XSTART        | 0x00          | RW  | Bit[7:0]: xstart[7:0]<br>Horizontal start address                          |
| 0x5A02  | YSTART        | 0x00          | RW  | Bit[7:3]: Not used<br>Bit[2:0]: ystart[10:8]<br>Vertical start address     |
| 0x5A03  | YSTART        | 0x00          | RW  | Bit[7:0]: ystart[7:0]<br>Vertical start address                            |

table 6-24 ISP window registers (sheet 2 of 2)

| address | register name | default value | R/W | description                                                                                                                                                                                                     |
|---------|---------------|---------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x5A04  | X WIN         | 0x0A          | RW  | Bit[7:4]: Not used<br>Bit[3:0]: x_win[11:8]<br>Select window width                                                                                                                                              |
| 0x5A05  | X WIN         | 0x80          | RW  | Bit[7:0]: x_win[7:0]<br>Select window width                                                                                                                                                                     |
| 0x5A06  | Y WIN         | 0x05          | RW  | Bit[7:3]: Not used<br>Bit[2:0]: y_win[10:8]<br>Select window height                                                                                                                                             |
| 0x5A07  | Y WIN         | 0xF0          | RW  | Bit[7:0]: y_win[7:0]<br>Select window height                                                                                                                                                                    |
| 0x5A08  | WIN CTRL 08   | 0x00          | RW  | Bit[7:0]: win_ctrl_08[7:0]<br>Bit[7:2]: Not used<br>Bit[1]: emb_flag_sel<br>0: Select top line<br>1: Select bottom line<br>Bit[0]: win_man_en<br>0: Window size from window top<br>1: Window size from register |
| 0x5A09  | PX CNT        | –             | R   | Bit[7:4]: Not used<br>Bit[3:0]: px_cnt[11:8]<br>Pixel count from input image in horizontal                                                                                                                      |
| 0x5A0A  | PX CNT        | –             | R   | Bit[7:0]: px_cnt[7:0]<br>Pixel count from input image in horizontal                                                                                                                                             |
| 0x5A0B  | LN CNT        | –             | R   | Bit[7:3]: Not used<br>Bit[2:0]: ln_cnt[10:8]<br>Line count from input image in vertical                                                                                                                         |
| 0x5A0C  | LN CNT        | –             | R   | Bit[7:0]: ln_cnt[7:0]<br>Line count from input image in vertical                                                                                                                                                |

## 6.25 DPC [0x5300 - 0x5327]

table 6-25 DPC registers (sheet 1 of 2)

| address | register name | default value | R/W | description                                                                                                                                                                  |
|---------|---------------|---------------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x5300  | R DPC CTRL00  | 0x1C          | RW  | Bit[7]: r_tail_en<br>Bit[6]: r_sat_en<br>Bit[5]: r_cluster<br>Bit[4]: r_scon_en<br>Bit[3]: r_dcon_en<br>Bit[2]: r_smooth_en<br>Bit[1]: r_bwsnr_en<br>Bit[0]: r_man_mode_en   |
| 0x5301  | R DPC CTRL01  | 0xDF          | RW  | Bit[7]: r_man_tthre<br>Bit[6]: r_comp_en<br>Bit[5]: r_vertical_bp_en<br>Bit[4]: r_color_line_en<br>Bit[3]: r_single_en<br>Bit[2]: r_tcluster_en<br>Bit[1:0]: r_edge_opt[1:0] |
| 0x5302  | R DPC CTRL02  | 0x3F          | RW  | Bit[7:6]: Not used<br>Bit[5:4]: r_unsat_cross_num<br>Bit[3:2]: r_unsat_num<br>Bit[1:0]: r_vnum                                                                               |
| 0x5303  | R WTHREGLIST1 | 0x08          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_wthreglist1[6:0]                                                                                                                             |
| 0x5304  | R BTHREGLIST2 | 0x20          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_bthreglist2[6:0]                                                                                                                             |
| 0x5305  | R THRE1       | 0x10          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_thre1[6:0]                                                                                                                                   |
| 0x5306  | R THRE2       | 0x20          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_thre2[6:0]                                                                                                                                   |
| 0x5307  | R THRE3       | 0x10          | RW  | Bit[7:0]: r_thre3[7:0]                                                                                                                                                       |
| 0x5308  | R THRE4       | 0x18          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_thre4[6:0]                                                                                                                                   |
| 0x5309  | R WTHRE LIST0 | 0x08          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_wthre_list0[6:0]                                                                                                                             |
| 0x530A  | R WTHRE LIST1 | 0x04          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_wthre_list1[6:0]                                                                                                                             |
| 0x530B  | R WTHRE LIST2 | 0x02          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_wthre_list2[6:0]                                                                                                                             |
| 0x530C  | R WTHRE LIST3 | 0x02          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_wthre_list3[6:0]                                                                                                                             |

table 6-25 DPC registers (sheet 2 of 2)

| address           | register name | default value | R/W | description                                      |
|-------------------|---------------|---------------|-----|--------------------------------------------------|
| 0x530D            | R BTHRE LIST0 | 0x0C          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_bthre_list0[6:0] |
| 0x530E            | R BTHRE LIST1 | 0x06          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_bthre_list1[6:0] |
| 0x530F            | R BTHRE LIST2 | 0x02          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_bthre_list2[6:0] |
| 0x5310            | R BTHRE LIST3 | 0x02          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_bthre_list3[6:0] |
| 0x5311            | R SAT         | 0xFF          | RW  | Bit[7:0]: r_sat[7:0]                             |
| 0x5312            | R DPC CTRL12  | 0x07          | RW  | Bit[7]: Not used<br>Bit[6:0]: vb_gain_th1        |
| 0x5313            | R DPC CTRL13  | 0x03          | RW  | Bit[7]: Not used<br>Bit[6:0]: vb_gain_th2        |
| 0x5314            | R DPC CTRL14  | 0x03          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_smooth_glist0    |
| 0x5315            | R DPC CTRL15  | 0x07          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_smooth_glist1    |
| 0x5316            | R DPC CTRL16  | 0x0F          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_smooth_glist2    |
| 0x5317            | R DPC CTRL17  | 0x07          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_smgain_th1       |
| 0x5318            | R DPC CTRL18  | 0x03          | RW  | Bit[7]: Not used<br>Bit[6:0]: r_smgain_th2       |
| 0x5319            | R DPC CTRL19  | 0xF0          | RW  | Bit[7:0]: r_unsat                                |
| 0x531A            | R DPC CTRL1A  | 0x08          | RW  | Bit[7:0]: r_tthre                                |
| 0x5320~<br>0x5327 | DEBUG MODE    | —             | —   | Debug Mode                                       |

## 6.26 color bar / scalar control [0x5E00 ~ 0x5E01]

table 6-26 color bar/scalar control registers

| address | register name     | default value | R/W | description                                                                                                                                                                                                                                                                                                                                                                          |
|---------|-------------------|---------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x5E00  | PRE ISP TEST CTRL | 0x00          | RW  | Bit[7]: test_enable<br>Bit[6]: Rolling enable<br>Rolling bar in test mode<br>Bit[5]: Transparent and normal image enable<br>Bit[4]: Debug mode<br>Bit[3:2]: color_bar style<br>00: Horizontal bar<br>01: Vertical fading bar<br>10: Horizontal fading bar<br>11: Vertical bar<br>Bit[1:0]: Test selection<br>00: Color bar<br>01: Random data<br>10: Square black white<br>11: Black |
| 0x5E01  | PRE ISP WIN       | 0x41          | RW  | Bit[7]: Not used<br>Bit[6]: Window cut enable<br>Bit[5]: ISP test<br>Low bits to 0<br>Bit[4]: Random<br>Random data reset<br>Bit[3:0]: Random seed                                                                                                                                                                                                                                   |

## 7 operating specifications

### 7.1 absolute maximum ratings

**table 7-1** absolute maximum ratings

| parameter                                          |                  | absolute maximum rating <sup>a</sup> |
|----------------------------------------------------|------------------|--------------------------------------|
| ambient storage temperature                        |                  | -40°C to +125°C                      |
| supply voltage (with respect to ground)            | $V_{DD-A}$       | 4.5V                                 |
|                                                    | $V_{DD-D}$       | 3V                                   |
|                                                    | $V_{DD-IO}$      | 4.5V                                 |
| electro-static discharge (ESD)                     | human body model | 2000V                                |
|                                                    | machine model    | 200V                                 |
| all input/output voltages (with respect to ground) |                  | -0.3V to $V_{DD-IO} + 1V$            |
| I/O current on any input or output pin             |                  | ± 200 mA                             |

- a. exceeding the absolute maximum ratings shown above invalidates all AC and DC electrical specifications and may result in permanent damage to the device. Exposure to absolute maximum rated conditions for extended periods may affect device reliability.

### 7.2 functional temperature

**table 7-2** functional temperature

| parameter                             | range                               |
|---------------------------------------|-------------------------------------|
| operating temperature <sup>a</sup>    | -30°C to +85°C junction temperature |
| stable image temperature <sup>b</sup> | 0°C to +60°C junction temperature   |

- a. sensor functions but image quality may be noticeably different at temperatures outside of stable image range  
 b. image quality remains stable throughout this temperature range

### 7.3 DC characteristics

**table 7-3** DC characteristics ( $-30^{\circ}\text{C} < T_J < 85^{\circ}\text{C}$ )

| symbol                                                                                   | parameter                     | min  | typ | max  | unit |
|------------------------------------------------------------------------------------------|-------------------------------|------|-----|------|------|
| supply                                                                                   |                               |      |     |      |      |
| V <sub>DD-A</sub>                                                                        | supply voltage (analog)       | 2.6  | 2.8 | 3.0  | V    |
| V <sub>DD-D</sub>                                                                        | supply voltage (digital core) | 1.14 | 1.2 | 1.26 | V    |
| V <sub>DD-IO</sub>                                                                       | supply voltage (digital I/O)  | 1.7  | 1.8 | 3.0  | V    |
| I <sub>DD-A</sub>                                                                        | active (operating) current    |      | 35  |      | mA   |
| I <sub>DD-D</sub>                                                                        |                               |      | 100 |      | mA   |
| I <sub>DD-IO</sub>                                                                       |                               |      | 3   |      | mA   |
| I <sub>DDS-SCCB</sub>                                                                    | standby current <sup>a</sup>  |      | 250 |      | μA   |
| I <sub>DDS-PWDN</sub>                                                                    |                               |      | 250 |      | μA   |
| I <sub>DDS-XSHUTDOWN</sub>                                                               |                               |      | 1   |      | μA   |
| digital inputs (typical conditions: AVDD = 2.8V, DVDD = 1.2V, DOVDD = 1.8V, EVDD = 1.2V) |                               |      |     |      |      |
| V <sub>IL</sub>                                                                          | input voltage LOW             |      |     | 0.54 | V    |
| V <sub>IH</sub>                                                                          | input voltage HIGH            | 1.26 |     |      | V    |
| C <sub>IN</sub>                                                                          | input capacitor               |      |     | 10   | pF   |
| digital outputs (standard loading 25 pF)                                                 |                               |      |     |      |      |
| V <sub>OH</sub>                                                                          | output voltage HIGH           | 1.62 |     |      | V    |
| V <sub>OL</sub>                                                                          | output voltage LOW            |      |     | 0.18 | V    |
| serial interface inputs                                                                  |                               |      |     |      |      |
| V <sub>IL</sub> <sup>b</sup>                                                             | SIOC and SIOD                 | -0.5 | 0   | 0.54 | V    |
| V <sub>IH</sub>                                                                          | SIOC and SIOD                 | 1.28 | 1.8 | 3.0  | V    |

a. standby current is measured at room temperature

b. based on DOVDD = 1.8V

## 7.4 AC characteristics

**table 7-4** AC characteristics

| symbol       | parameter             | min | typ   | max | unit |
|--------------|-----------------------|-----|-------|-----|------|
| inputs       |                       |     |       |     |      |
| $f_{CLK}$    | input clock frequency | 6   | 24    | 64  | MHz  |
| $t_{CLK}$    | input clock period    |     | 41.67 |     | ns   |
| $t_{CLK:DC}$ | clock duty cycle      | 45  | 50    | 55  | %    |

## 7.5 timing characteristics

**table 7-5** timing characteristics

| symbol                     | parameter                  | min | typ | max | unit |
|----------------------------|----------------------------|-----|-----|-----|------|
| oscillator and clock input |                            |     |     |     |      |
| $f_{OSC}$                  | frequency (EXTCLK)         | 6   | 24  | 64  | MHz  |
| $t_r, t_f$                 | clock input rise/fall time |     |     | TBD | ns   |

**OV13850**


color CMOS 13.2 megapixel (4224 x 3136) image sensor with OmniBSI-3™ technology

Confidential for  
CMK

## 8 mechanical specifications

### 8.1 COB physical specifications

**figure 8-1** COB die specifications

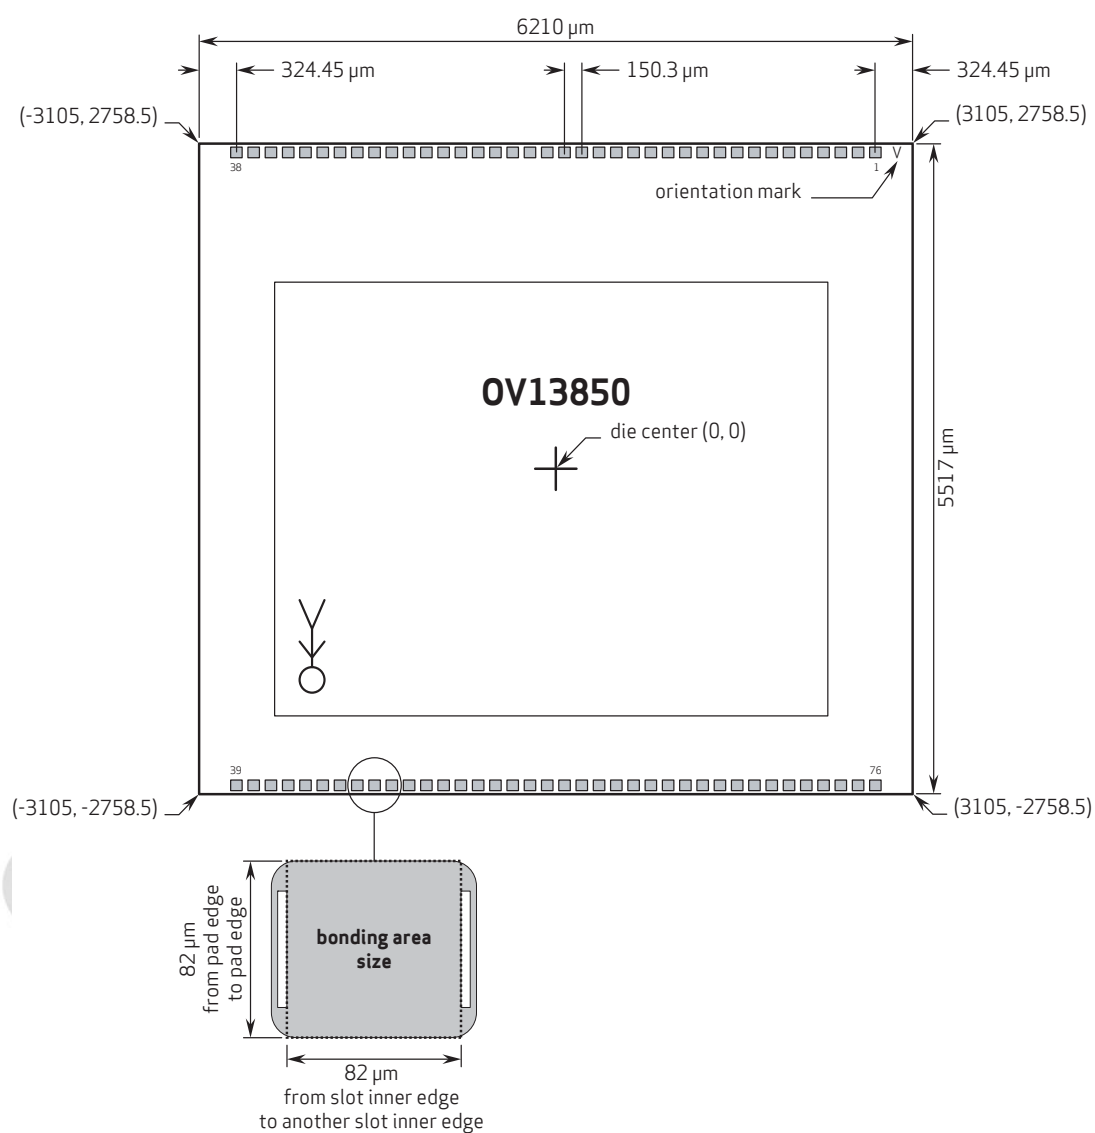

**note 1** all dimensions and coordinates are in  $\mu\text{m}$ .

**note 2** bonding outside the defined area is prohibited as it may cause failure in reliability or functionality 13850\_COB\_DS\_8.1

table 8-1 pad location coordinates (sheet 1 of 3)

| pad number | pad name | x coordinate | y coordinate | bonding area size |
|------------|----------|--------------|--------------|-------------------|
| 1          | DVDD     | 2780.55      | 2683.71      | 82x82             |
| 2          | DOGND    | 2630.25      | 2683.71      | 82x82             |
| 3          | AGND     | 2479.95      | 2683.71      | 82x82             |
| 4          | AGND     | 2329.65      | 2683.71      | 82x82             |
| 5          | AVDD     | 2179.35      | 2683.71      | 82x82             |
| 6          | AVDD     | 2029.05      | 2683.71      | 82x82             |
| 7          | DVDD     | 1878.75      | 2683.71      | 82x82             |
| 8          | GPIO1    | 1728.45      | 2683.71      | 82x82             |
| 9          | SID      | 1578.15      | 2683.71      | 82x82             |
| 10         | ILPWM    | 1427.85      | 2683.71      | 82x82             |
| 11         | GPIO     | 1277.55      | 2683.71      | 82x82             |
| 12         | FSIN     | 1127.25      | 2683.71      | 82x82             |
| 13         | FREX     | 976.95       | 2683.71      | 82x82             |
| 14         | DOGND    | 826.65       | 2683.71      | 82x82             |
| 15         | DOGND    | 676.35       | 2683.71      | 82x82             |
| 16         | DVDD     | 526.05       | 2683.71      | 82x82             |
| 17         | DVDD     | 375.75       | 2683.71      | 82x82             |
| 18         | HREF     | 225.45       | 2683.71      | 82x82             |
| 19         | SIOD     | 75.15        | 2683.71      | 82x82             |
| 20         | NC       | -75.15       | 2683.71      | 82x82             |
| 21         | SIOC     | -225.45      | 2683.71      | 82x82             |
| 22         | NC       | -375.75      | 2683.71      | 82x82             |
| 23         | AVDD     | -526.05      | 2683.71      | 82x82             |
| 24         | DOVDD    | -676.35      | 2683.71      | 82x82             |
| 25         | DOVDD    | -826.65      | 2683.71      | 82x82             |
| 26         | DVDD     | -976.95      | 2683.71      | 82x82             |
| 27         | DVDD     | -1127.25     | 2683.71      | 82x82             |
| 28         | DOGND    | -1277.55     | 2683.71      | 82x82             |
| 29         | DOGND    | -1427.85     | 2683.71      | 82x82             |
| 30         | ATEST0   | -1578.15     | 2683.71      | 82x82             |

table 8-1 pad location coordinates (sheet 2 of 3)

| pad number | pad name  | x coordinate | y coordinate | bonding area size |
|------------|-----------|--------------|--------------|-------------------|
| 31         | DOGND     | -1728.45     | 2683.71      | 82x82             |
| 32         | DOGND     | -1878.75     | 2683.71      | 82x82             |
| 33         | DVDD      | -2029.05     | 2683.71      | 82x82             |
| 34         | DVDD      | -2179.35     | 2683.71      | 82x82             |
| 35         | AVDD      | -2329.65     | 2683.71      | 82x82             |
| 36         | AVDD      | -2479.95     | 2683.71      | 82x82             |
| 37         | AGND      | -2630.25     | 2683.71      | 82x82             |
| 38         | AGND      | -2780.55     | 2683.71      | 82x82             |
| 39         | AGND      | -2780.55     | -2683.71     | 82x82             |
| 40         | AVDD      | -2630.25     | -2683.71     | 82x82             |
| 41         | DOGND     | -2479.95     | -2683.71     | 82x82             |
| 42         | DVDD      | -2329.65     | -2683.71     | 82x82             |
| 43         | VH        | -2179.35     | -2683.71     | 82x82             |
| 44         | VN        | -2029.05     | -2683.71     | 82x82             |
| 45         | DOVDD     | -1878.75     | -2683.71     | 82x82             |
| 46         | XSHUTDOWN | -1728.45     | -2683.71     | 82x82             |
| 47         | PWDNB     | -1578.15     | -2683.71     | 82x82             |
| 48         | AGND      | -1427.85     | -2683.71     | 82x82             |
| 49         | AVDD      | -1277.55     | -2683.71     | 82x82             |
| 50         | TM        | -1127.25     | -2683.71     | 82x82             |
| 51         | STROBE    | -976.95      | -2683.71     | 82x82             |
| 52         | DOVDD     | -826.65      | -2683.71     | 82x82             |
| 53         | MDP2      | -676.35      | -2683.71     | 82x82             |
| 54         | MDN2      | -526.05      | -2683.71     | 82x82             |
| 55         | EVDD      | -375.75      | -2683.71     | 82x82             |
| 56         | MDP0      | -225.45      | -2683.71     | 82x82             |
| 57         | MDN0      | -75.15       | -2683.71     | 82x82             |
| 58         | EGND      | 75.15        | -2683.71     | 82x82             |
| 59         | PVDD      | 225.45       | -2683.71     | 82x82             |
| 60         | EGND      | 375.75       | -2683.71     | 82x82             |

table 8-1 pad location coordinates (sheet 3 of 3)

| pad number | pad name | x coordinate | y coordinate | bonding area size |
|------------|----------|--------------|--------------|-------------------|
| 61         | EVDD     | 526.05       | -2683.71     | 82x82             |
| 62         | MCP      | 676.35       | -2683.71     | 82x82             |
| 63         | MCN      | 826.65       | -2683.71     | 82x82             |
| 64         | EGND     | 976.95       | -2683.71     | 82x82             |
| 65         | MDP1     | 1127.25      | -2683.71     | 82x82             |
| 66         | MDN1     | 1277.55      | -2683.71     | 82x82             |
| 67         | EVDD     | 1427.85      | -2683.71     | 82x82             |
| 68         | MDP3     | 1578.15      | -2683.71     | 82x82             |
| 69         | MDN3     | 1728.45      | -2683.71     | 82x82             |
| 70         | DOGND    | 1878.75      | -2683.71     | 82x82             |
| 71         | VSNC     | 2029.05      | -2683.71     | 82x82             |
| 72         | EXTCLK   | 2179.35      | -2683.71     | 82x82             |
| 73         | DOGND    | 2329.65      | -2683.71     | 82x82             |
| 74         | DOGND    | 2479.95      | -2683.71     | 82x82             |
| 75         | DVDD     | 2630.25      | -2683.71     | 82x82             |
| 76         | DVDD     | 2780.55      | -2683.71     | 82x82             |

## 8.2 reconstructed wafer (RW) physical specifications

- maximum total die count: 621
- film frame: Compact Disco Stainless SUS420
- carrier tape: UV tape

**table 8-2** RW physical dimensions

| feature                                     | dimensions                                                            |
|---------------------------------------------|-----------------------------------------------------------------------|
| RW physical dimensions                      | 8" RW on 12" frame                                                    |
| wafer thickness (OVXXXXX-ABCD)              |                                                                       |
| C=4                                         | 200 $\mu\text{m}$ $\pm$ 10 $\mu\text{m}$ (7.9 mil $\pm$ 0.4 mil)      |
| reconstructed wafer street width            | 0.762 mm (30 mil) $\pm$ 0.05 mm                                       |
| placement accuracy x, y, theta              | $\pm$ 50 $\mu\text{m}$ ( $\pm$ 2 mil), <1.0 degree                    |
| singulated die size                         |                                                                       |
| width                                       | 6260 $\mu\text{m}$ $\pm$ 20 $\mu\text{m}$ (246.5 mil $\pm$ 0.8 mil)   |
| length                                      | 5567 $\mu\text{m}$ $\pm$ 20 $\mu\text{m}$ (219 mil $\pm$ 0.8 mil)     |
| bond pad size                               | 96 $\mu\text{m}$ $\times$ 82 $\mu\text{m}$ (3.8 mil $\times$ 3.2 mil) |
| minimum bond pad pitch                      | 150.3 $\mu\text{m}$ (5.9 mil)                                         |
| bonding area size                           | 82 $\mu\text{m}$ $\times$ 82 $\mu\text{m}$ (3.2 mil $\times$ 3.2 mil) |
| optical array                               |                                                                       |
| die center                                  | (0, 0)                                                                |
| optical center from die center <sup>a</sup> | -40.5 $\mu\text{m}$ , -255.6 $\mu\text{m}$ (-1.6 mil, -10.1 mil)      |


a. based on die orientation on frame with notch facing down position



### note

Actual die count varies and the absent die may be less than 10% of the maximum total die count (excluding the last frame of the wafer lot).

figure 8-2 OV13850 RW physical diagram

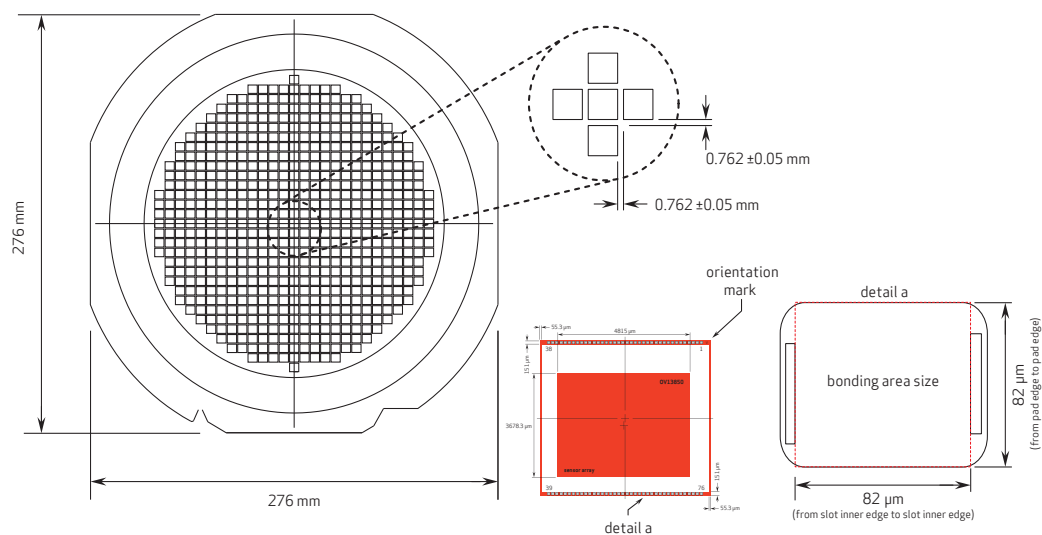

**note 1** bonding outside the defined bonding area is prohibited, it may potentially induce reliability issues or functionality failure


**note 2** keep-out-of-contact areas are highlighted in red color for related process fixtures/tools (e.g., nozzle, collets, etc.)

13850\_C08\_D5\_8\_2

## 9 optical specifications

### 9.1 sensor array center

**figure 9-1** sensor array center

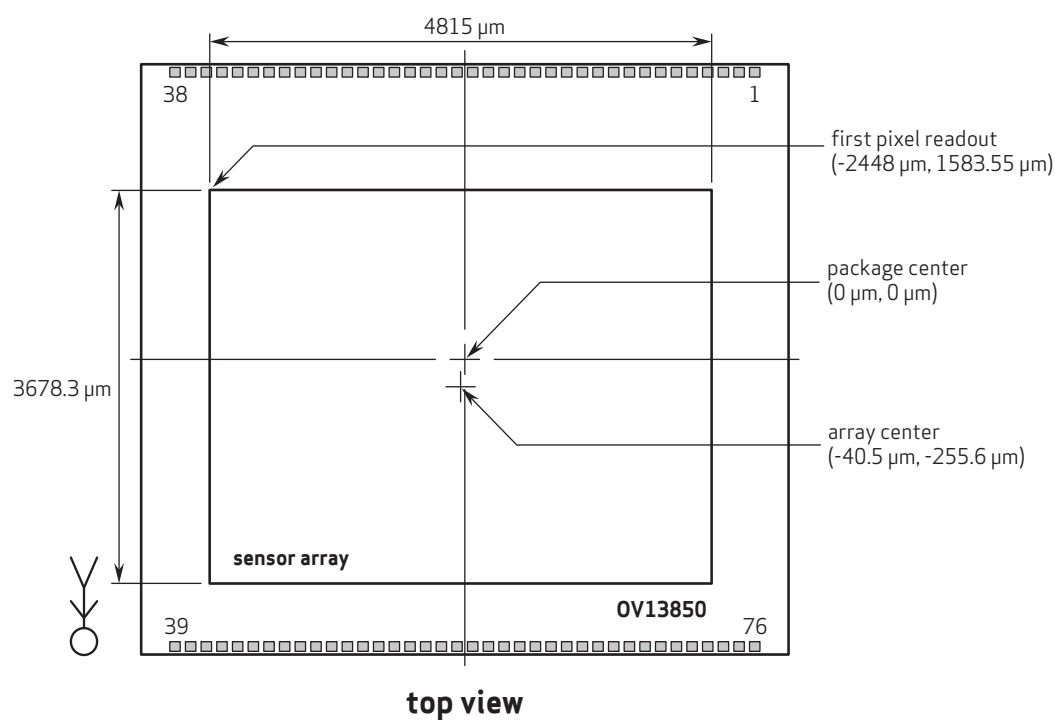

**note 1** this drawing is not to scale and is for reference only.

**note 2** as most optical assemblies invert and mirror the image, the chip is typically mounted with pad 1 oriented down on the PCB.

13850\_C0B\_DS\_9\_1

## 9.2 lens chief ray angle (CRA)

figure 9-2 chief ray angle (CRA)

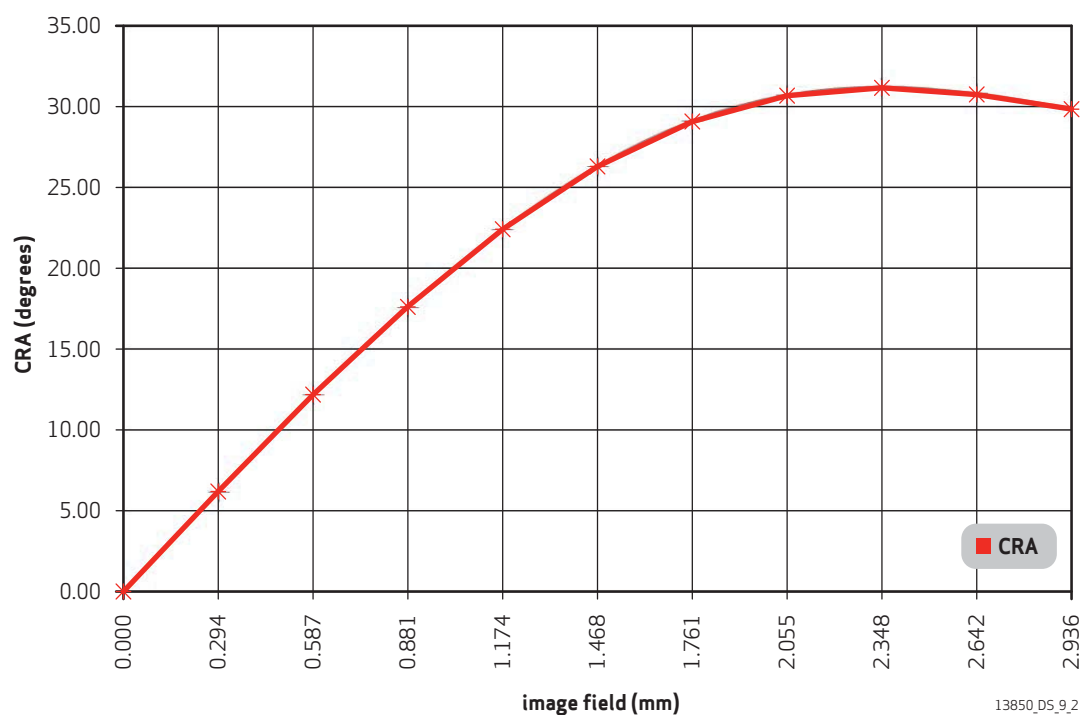


table 9-1 CRA versus image height plot

| field (%) | image height (mm) | CRA (degrees) |
|-----------|-------------------|---------------|
| 0.00      | 0.000             | 0.00          |
| 0.10      | 0.294             | 6.20          |
| 0.20      | 0.587             | 12.20         |
| 0.30      | 0.881             | 17.60         |
| 0.40      | 1.174             | 22.40         |
| 0.50      | 1.468             | 26.30         |
| 0.60      | 1.761             | 29.10         |
| 0.70      | 2.055             | 30.70         |
| 0.80      | 2.348             | 31.20         |
| 0.90      | 2.642             | 30.80         |
| 1.00      | 2.936             | 29.90         |

## appendix A handling of RW devices

### A.1 ESD /EOS prevention

1. Ensure that there is 500V ESD control in all work areas.
2. Use ESD safety shoes, ground strap, and static control smocks in test areas.
3. Use grounded work carts and tables in inspection areas.
4. OmniVision recommends the use of ionized air in all work areas.

### A.2 particles and cleanliness of environment

1. All production, inspection and packaging areas should meet Class10 environment requirements.
2. Use optical microscopes with 50X and 100X magnifications for particle inspection.
3. Ensure that there is good cassette sealing for particle protection during storage.
4. OmniVision recommends air blowing to remove removable particles.
5. RW die should be stored in nitrogen gas purged cabinets with temperature less than 30°C and relative humidity of 60% before assembly.

### A.3 other requirements

1. Reliability assurance of RW or COB bare die is certified by product reliability of the bare die in a CLCC, CSP or QFP package form factor. Precautions should be taken if the packaging form factor of the bare die is other than these specified.
2. Avoid exposure to strong sunlight for extended periods of time as the color filter of the image sensor may become discolored.
3. Avoid direct exposure of the sensor bare die to high temperature and/or humidity environment as sensor characteristics will be affected. Extra precautions should be exercised if the bare die experiences temperatures exceeding 260°C for more than 75 seconds.

**OV13850**

color CMOS 13.2 megapixel (4224 x 3136) image sensor with OmniBSI-3™ technology

Confidential for  
CMK

## revision history

### version 1.0 05.24.2013

- initial release

### version 1.01 08.21.2013

- in section 8.2, changed carrier tape from "FSL-N6600" to "UV tape"

### version 1.1 09.18.2013

- in key specifications, changed power requirements to 223mW (active), 300μW (standby), and 1μW (XSHUTDOWN)
- in chapter 4, removed subsection 4.7.2
- in table 6-1, changed bit description for 0x3012[7:4] to "0000: 0 lane; 0001: 1 lane; 0010: 2 lanes; 0100: 4 lanes"
- in table 7-3, changed typ values for active current to 35mA ( $I_{DD-A}$ ) and 3mA ( $I_{DD-IO}$ ) and added typ value 100mA for active current ( $I_{DD-D}$ )
- in table 7-3, changed typ values for standby current to 250μA ( $I_{DDS-SCCB}$ ), 250μA ( $I_{DDS-PWDN}$ ), and 1μA ( $I_{DDS-XSHUTDOWN}$ )

### version 1.2 10.22.2013

- in features, removed reference to frame exposure mode and added sidebar note
- in table 1-1, removed "(internal pull down resistor)" from pad 9 description
- in table 1-3, moved SID to new row
- in section 2, updated figures 2-3, 2-4, and 2-5
- in table 4-3, changed description for register bit 0x4000[4] to "Not used"
- in section 4.7, removed second paragraph from sub-section 4.7.1.4, table 4-8 and sub-sections 4.7.1.5~4.7.1.10
- in section 5.1, removed RAW scalar from section description
- in section 6, changed "... 0x6C for write and 0x61 for read..." to "... 0x6C for write and 0x6D..." and removed section 6.6
- in table 6-11, changed description for register bit 0x4000[4] to "Not used"
- in table 7-3, removed "for 2-lane MIPI..." from  $V_{DD-D}$  parameter and changed " $I_{DDB}$ " to " $I_{DDS}$ " for standby current symbols

**OV13850**

color CMOS 13.2 megapixel (4224 x 3136) image sensor with OmniBSI-3™ technology

Confidential for  
CMK

defining the future of digital imaging™

## OmniVision Technologies, Inc.

### UNITED STATES

4275 Burton Drive  
Santa Clara, CA 95054

tel: +1 408 567 3000

fax: +1 408 567 3001

email: [salesamerican@ovt.com](mailto:salesamerican@ovt.com)

### UNITED KINGDOM

Hampshire +44 1256 744 610

### GERMANY

Munich +49 89 63 81 99 88

### INDIA

Bangalore +91 988 008 0140

### CHINA

Beijing +86 10 6580 1690

Shanghai +86 21 6175 9888

Shenzhen +86 755 8384 9733

Hong Kong +852 2403 4011

### JAPAN

Yokohama +81 45 478 7977

Osaka +81 6 4964 2606

### KOREA

Seoul +82 2 3478 2812

### SINGAPORE +65 6220 1335

### TAIWAN

Taipei +886 2 2657 9800

Hsinchu +886 3 6110933

website: [www.ovt.com](http://www.ovt.com)