


Helping Customers Innovate, Improve & Grow

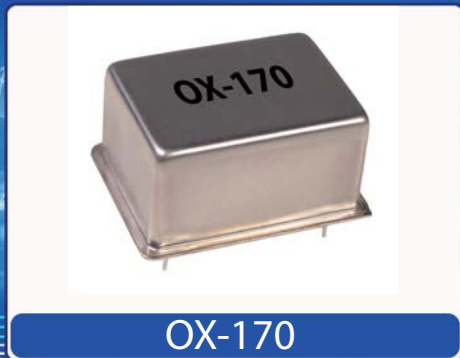

Features

- Reflow Process Compatible
- AT-CUT and SC_CUT Crystal Options
- Low Profile Compact Package

Applications

- Base stations
- Test equipment
- Synthesizers
- Military communication equipment
- Digital Switching

Performance Specifications

Frequency Stabilities ¹ (AT-Cut Crystal-Standard -)						
Parameter	Min	Typical	Max	Units	Condition	Options ⁵
vs. operating temperature range (referenced to +25°C)	-30		+30	ppb	0 to +70°C	
	-80		+80	ppb	-20 to +70°C	
	-100		+100	ppb	-20 to +70°C	
	-200		+200	ppb	-40 to +85°C	
Initial tolerance	-0.3		+0.3	ppm	at time of shipment, nominal EFC	
vs. supply voltage change	-5		+5	ppb	V _s ±5% static	
vs. load change	-5		+5	ppb	Load ±5% static	
vs. aging / day	-2		+2	ppb	after 30 days of operation	
vs. aging / year	-500		+500	ppb	after 30 days of operation	
vs. aging / year (following year)	-250		+250	ppb	after 30 days of operation	
Warm-up time			5	minutes	to ±100ppb of final frequency (1 hour reading) @ +25°C	
Frequency Stabilities ¹ (SC-Cut Crystal-Option)						
vs. operating temperature range (referenced to +25°C)	-10		+10	ppb	0 to +70°C	
	-10		+10	ppb	-20 to +70°C	
	-20		+20	ppb	-20 to +70°C	
	-30		+30	ppb	-40 to +85°C	
Initial tolerance	-0.1		+0.1	ppm	at time of shipment, nominal EFC	
vs. supply voltage change	-5		+5	ppb	V _s ±5% static	
vs. load change	-5		+5	ppb	Load ±5% static	
vs. aging / day	-1		+1	ppb	after 30 days of operation	
vs. aging / year	-100		+100	ppb	after 30 days of operation	
vs. aging / year (following year)	-50		+50	ppb	after 30 days of operation	
Warm-up time			5	minutes	to ±100ppb of final frequency (1 hour reading) @ +25°C	

Supply Voltage (Vs)						
Parameter	Min	Typical	Max	Units	Condition	
Supply voltage (standard)	3.135	3.3	3.465	VDC		
	4.75	5.0	5.25	VDC		
	11.4	12.0	12.6	VDC		
Power consumption			3.5	Watts	during warm-up	
			1.0	Watts	steady state @ +25°C	
RF Output						
Signal [standard]	HCMOS					
Load		15		pF		
Signal Level (Vol)			0.4	VDC	with Vs=3.3V and 15pF Load	
Signal Level (Vol)			0.5		with Vs=5.0V & 12V and 15pF Load	
Signal Level (Voh)	2.4			VDC	with Vs=3.3V and 15pF Load	
Signal Level (Voh)	3.5				with Vs=5.0V & 12V and 15pF Load	
Duty Cycle	45		55	%	@ (Voh-Vol)/2	
Signal	Sine Wave					
Load		50		Ω		
Output Power @3,3V	2	5	8	dBm	50 Ω load	
Putput Power @ 5.0V	5	8	11	dBm	50 Ω load	
Harmonics			-30	dBm	50 Ω load	
Frequency Tuning (EFC)						
Tuning Range	Fixed OCXO; No adjust				Option ⁵	
Tuning Range	±3.0		±8	ppm		with AT cut crystal
	±0.75		±2.0	ppm		with SC cut crystal
Linearity	10%					
Tuning Slope	Positive					
Control Voltage Range	0.0	1.4	2.8	VDC	with Vs=3.3V	
	0.0	2.0	4.0		with Vs=5.0V	
	0.0	2.0	4.0	VDC	with Vs=12.0V	
Reference Voltage Output (Vref)						
Reference Voltage	2.75	2.8	2.85	VDC	with Vs = 3.3 VDC	
	3.92	4.0	4.08	VDC	with Vs = 5.0 VDC	
	4.9	5.0	5.1	VDC	with Vs =12 VDC	
Additional Parameters						
Phase Noise ³			-90	dBc/Hz	1 Hz	@ 10MHz with SC Cut
			-120	dBc/Hz	10 Hz	
			-140	dBc/Hz	100 Hz	
			-145	dBc/Hz	1 kHz	
			-150	dBc/Hz	10 kHz	
Phase Noise ³			-75	dBc/Hz	1 Hz	@ 10MHz with AT Cut
			-105	dBc/Hz	10 Hz	
			-130	dBc/Hz	100 Hz	
			-140	dBc/Hz	1 kHz	
			-150	dBc/Hz	10 kHz	
Weight			14	g		
Processing & Packing	Handling & Processing Note					


Absolute Maximum Ratings

supply voltage (Vs)		6.5	V	with Vs=3.3 & 5.0VDC
		15.0	V	with Vs= 12 VDC
Output Load		50	pF	
Operable Temperature Range	-55	+85	°C	
Storage Temperature Range	-55	+125	°C	

www.DataSheet4U.com



Outline Drawing / Enclosure

G157

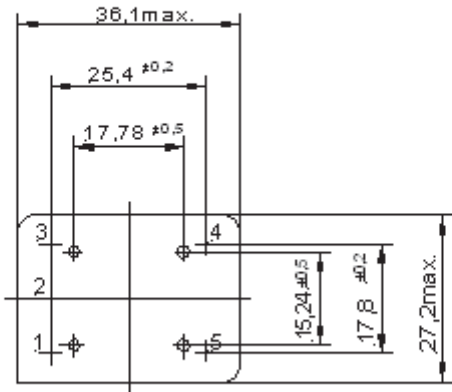


OX-170	
Height "H"	Pin Length "L"
12.2	4.5 mm min
13.5	4.5 mm min
15.2	4.5 mm min
18.2	4.5 mm min

Pin Connections	
1	Electronic Frequency Control Input (EFC)
2	Reference Voltage Option
3	Supply Voltage Input (VS)
4	RF Output
5	Ground (Case)

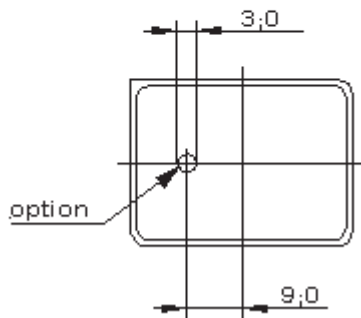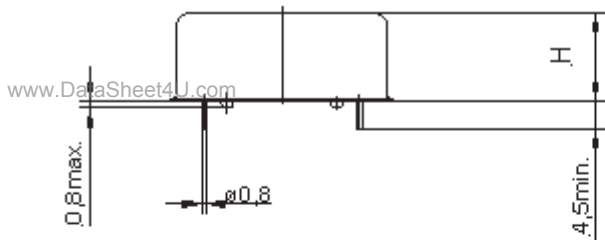

Dimensions in mm

Ordering Information

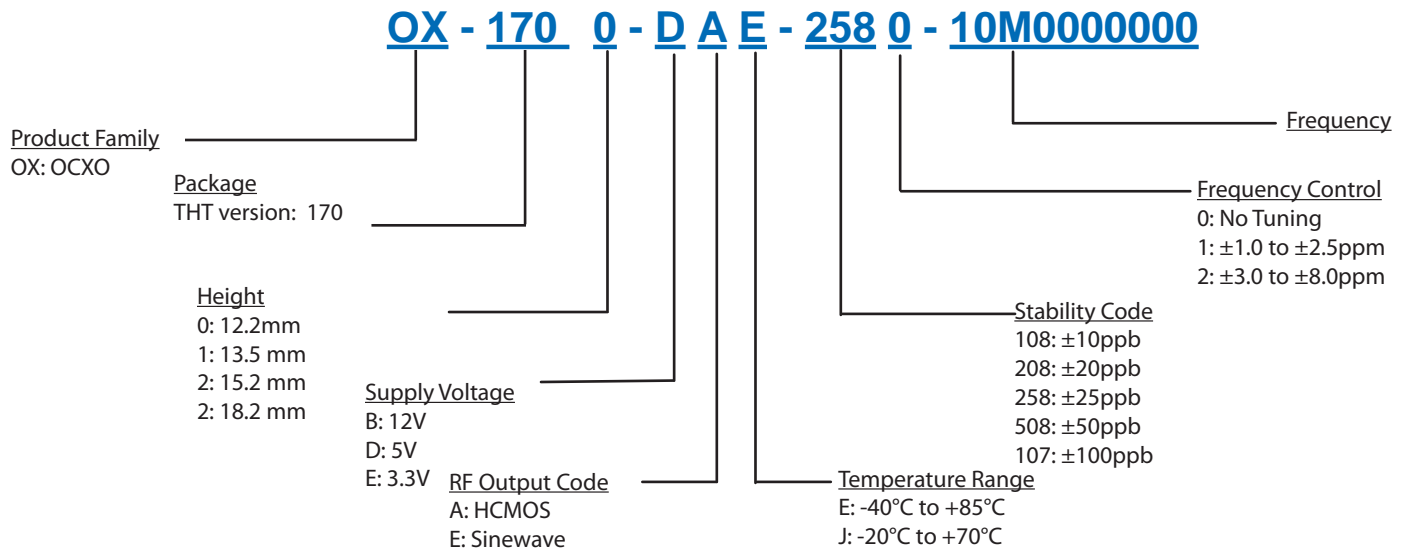**Notes:**

1. Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
2. Unless other stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).
3. Phase noise degrades with increasing output frequency.
4. Subject to technical modification.
5. Contact factory for availability.

www.DataSheet4U.com

For Additional Information, Please Contact

USA:

Vectron International
267 Lowell Road
Hudson, NH 03051
Tel: 1.888.328.7661
Fax: 1.888.329.8328

Europe:

Vectron International
Landstrasse, D-74924
Neckarbischofsheim, Germany
Tel: +49 (0) 3328.4784.17
Fax: +49 (0) 3328.4784.30

Asia:

Vectron International
1F-2F, No 8 Workshop, No 308 Fenju Road
WaiGaoQiao Free Trade Zone
Pudong, Shanghai, China 200131
Tel: 86.21.5048.0777
Fax: 86.21.5048.1881

Disclaimer

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Rev: 12Feb2009