


P0270ATF / P0270ATFS N-Channel Enhancement Mode MOSFET


PRODUCT SUMMARY

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
700V	6.3Ω @ $V_{GS} = 10V$	2A

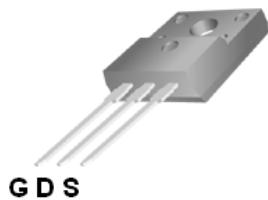

TO-220F

TO-220FS



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ C$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS	SYMBOL	LIMITS	UNITS
Gate-Source Voltage	V_{GS}	± 30	V
Continuous Drain Current ²	I_D	2	A
		1	
Pulsed Drain Current ¹	I_{DM}	8	
Avalanche Energy ³	E_{AS}	5	mJ
Power Dissipation	P_D	26	W
		10	
Operating Junction & Storage Temperature Range	T_J, T_{STG}	-55 to 150	°C

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Case	$R_{\theta JC}$		4.7	°C / W
Junction-to-Ambient	$R_{\theta JA}$		62.5	

¹Pulse width limited by maximum junction temperature.

²Limited only by maximum temperature allowed.

³ $V_{DD} = 50V$, $L = 10mH$, starting $T_J = 25^\circ C$

P0270ATF / P0270ATFS

N-Channel Enhancement Mode MOSFET







ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNITS
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$	700			V
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}} = V_{\text{GS}}, I_D = 250\mu\text{A}$	2.5	3.8	4.5	
Gate-Body Leakage	I_{GSS}	$V_{\text{DS}} = 0\text{V}, V_{\text{GS}} = \pm 30\text{V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}} = 700\text{V}, V_{\text{GS}} = 0\text{V}$			25	μA
		$V_{\text{DS}} = 560\text{V}, V_{\text{GS}} = 0\text{V}, T_J = 125^\circ\text{C}$			250	
Drain-Source On-State Resistance ¹	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}} = 10\text{V}, I_D = 1\text{A}$		5.5	6.3	Ω
Forward Transconductance ¹	g_{fs}	$V_{\text{DS}} = 10\text{V}, I_D = 1\text{A}$		1.5		S
DYNAMIC						
Input Capacitance	C_{iss}	$V_{\text{GS}} = 0\text{V}, V_{\text{DS}} = 25\text{V}, f = 1\text{MHz}$		333		pF
Output Capacitance	C_{oss}			42		
Reverse Transfer Capacitance	C_{rss}			11		
Total Gate Charge ²	Q_g	$V_{\text{DS}} = 560\text{V}, V_{\text{GS}} = 10\text{V}, I_D = 2\text{A}$		6.5		nC
Gate-Source Charge ²	Q_{gs}			2		
Gate-Drain Charge ²	Q_{gd}			1.5		
Turn-On Delay Time ²	$t_{\text{d}(\text{on})}$	$V_{\text{DD}} = 350\text{V}, I_D \geq 2\text{A}, V_{\text{GS}} = 10\text{V}, R_{\text{GS}} = 25\Omega$		30		nS
Rise Time ²	t_r			80		
Turn-Off Delay Time ²	$t_{\text{d}(\text{off})}$			50		
Fall Time ²	t_f			70		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS ($T_J = 25^\circ\text{C}$)						
Continuous Current	I_S				2	A
Forward Voltage ¹	V_{SD}	$I_F = 2\text{A}, V_{\text{GS}} = 0\text{V}$			1.5	V
Reverse Recovery Time	t_{rr}	$I_S = 2\text{A}, dI_S/dt = 100\text{A}/\mu\text{s}$		356		nS
Reverse Recovery Charge	Q_{rr}			1.2		μC

¹Pulse test : Pulse Width $\leq 300\ \mu\text{sec}$, Duty Cycle $\leq 2\%$.


²Independent of operating temperature.

P0270ATF / P0270ATFS N-Channel Enhancement Mode MOSFET

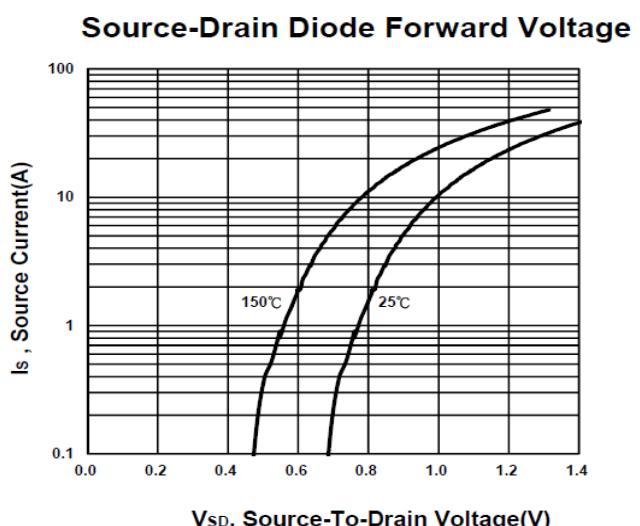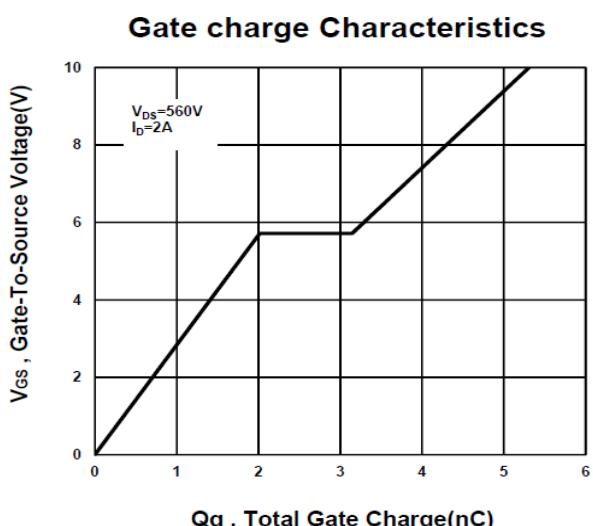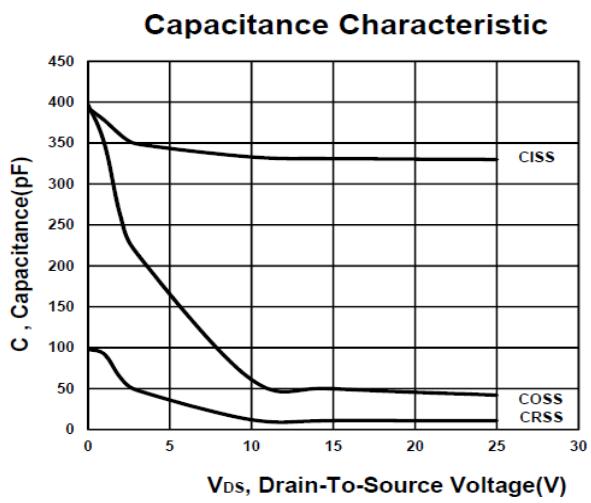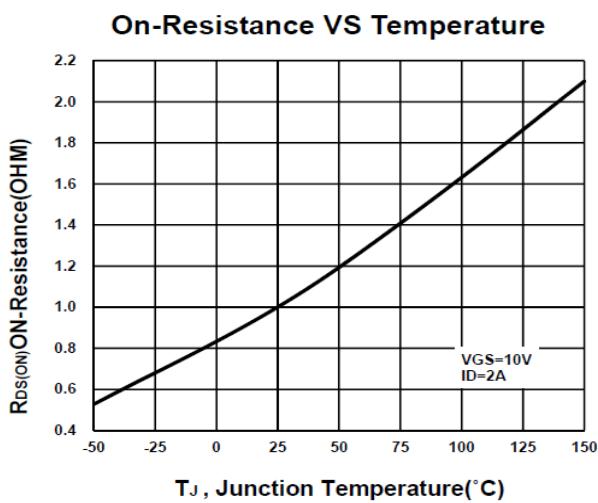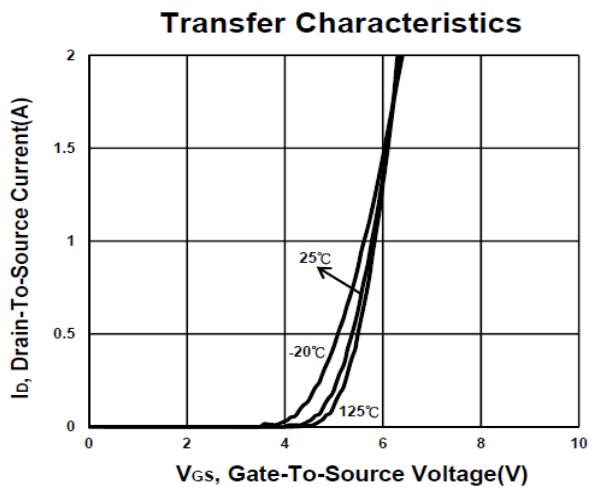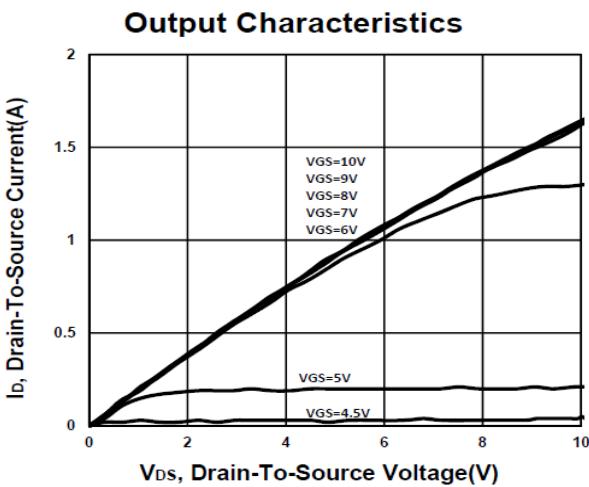


P0270ATF / P0270ATFS N-Channel Enhancement Mode MOSFET


Safe Operating Area

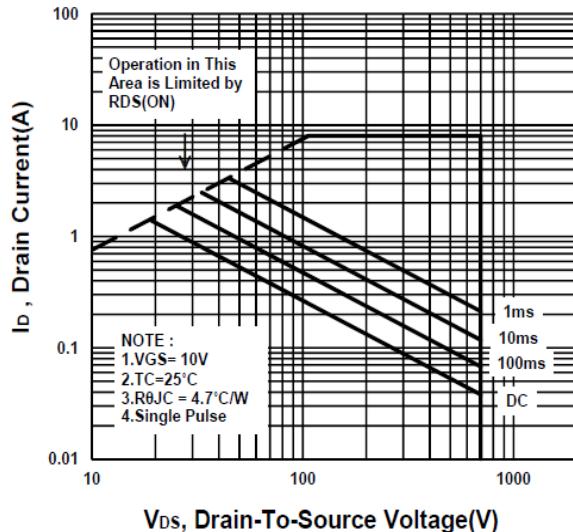

Single Pulse Maximum Power Dissipation

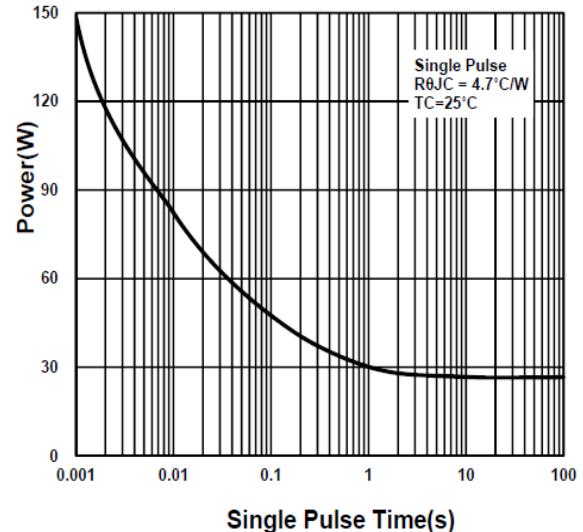

Transient Thermal Response Curve

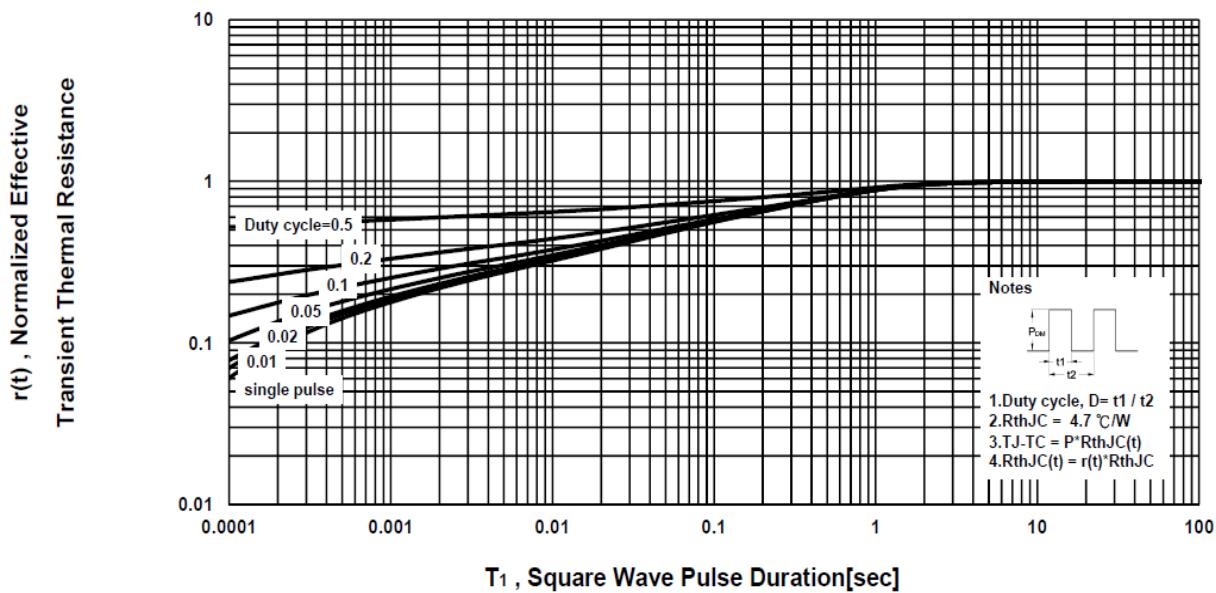


P0270ATF / P0270ATFS N-Channel Enhancement Mode MOSFET

Package Dimension

TO-220F (3-Lead) MECHANICAL DATA

Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	4.2		4.93	e	2.05	2.55	3.05
A1	2.34		3.1	F	27.45		30.6
B	17.77		20.3	G	7.72		9.3
b	0.6		1.05	H	6.1		7.1
b1	0.9	1.23	1.62	L	12.5		14.5
b2	0.6		1.9	L1	1.97		3.8
c	0.4		1.0	P	2.98		3.4
D	14.7		16.4	Q	2.1		2.96
D1	6.4		7.5	q	3.0		3.8
E	9.7		10.4				

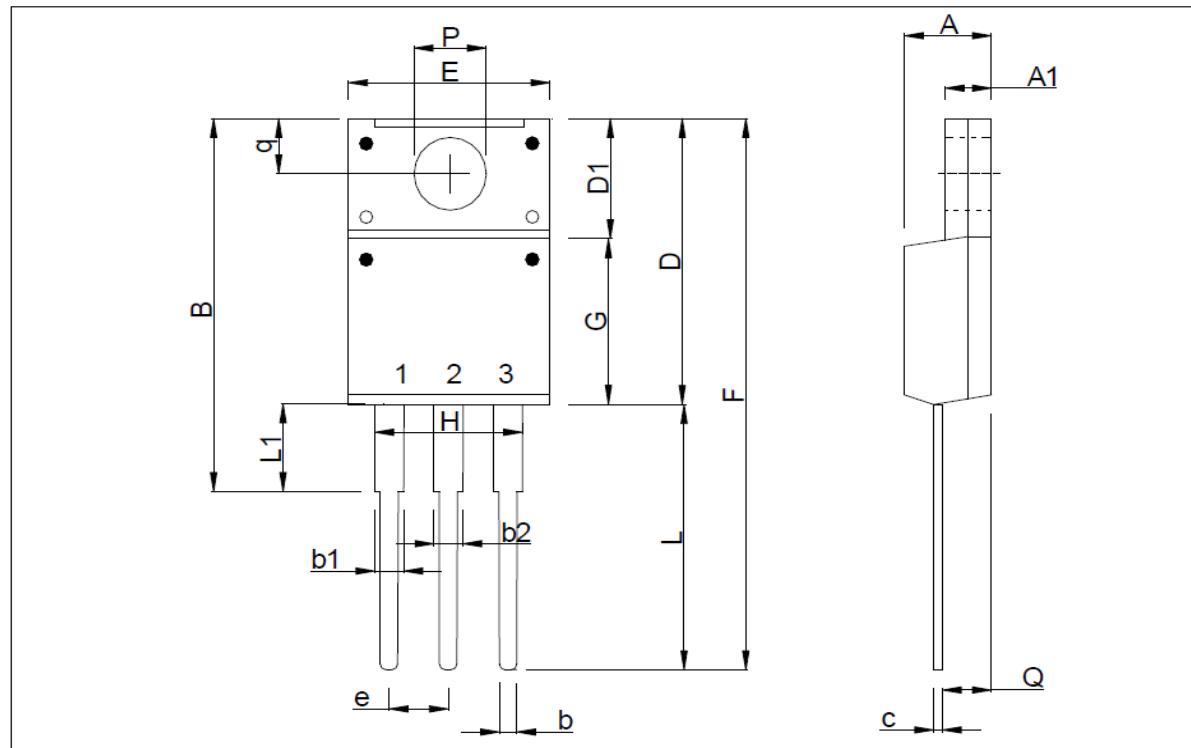

P0270ATF / P0270ATFS N-Channel Enhancement Mode MOSFET

Package Dimension

TO-220FS (3-Lead) MECHANICAL DATA

Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	4.2	4.7	4.93	e	2.05	2.54	3.05
A1	2.34	2.8	3.1	F	28.04		30.3
B	17.7		20.3	G	8.2	8.87	9.57
b	0.65	0.8	1.05	L	12.37		14.3
b1	0.9	1.3	1.5	L1	1.4	2.3	2.5
c	0.4	0.7	1.0	P	2.98	3.2	3.4
D	15.37		16.3	Q	2.1	2.6	2.96
D1	5.5		7.5	q	3.0	3.5	3.8
E	9.7	10.16	10.36				

