


P06P03LDG


P-Channel Enhancement Mode MOSFET

PRODUCT SUMMARY

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
-30V	45m Ω @ $V_{GS} = -10V$	-12A



TO-252



ABSOLUTE MAXIMUM RATINGS ($T_A = 25\text{ }^{\circ}\text{C}$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNITS
Drain-Source Voltage		V_{DS}	-30	V
Gate-Source Voltage		V_{GS}	± 20	
Continuous Drain Current	$T_C = 25\text{ }^{\circ}\text{C}$	I_D	-12	A
	$T_C = 100\text{ }^{\circ}\text{C}$		-10	
Pulsed Drain Current ¹		I_{DM}	-30	
Avalanche Current		I_{AS}	-29	
Avalanche Energy	$L = 0.1\text{mH}$	E_{AS}	42	mJ
Power Dissipation	$T_C = 25\text{ }^{\circ}\text{C}$	P_D	48	W
	$T_C = 100\text{ }^{\circ}\text{C}$		20	
Operating Junction & Storage Temperature Range		T_J, T_{STG}	-55 to 150	$^{\circ}\text{C}$

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Case	$R_{\theta JC}$		3	$^{\circ}\text{C} / \text{W}$
Junction-to-Ambient	$R_{\theta JA}$		75	

¹Pulse width limited by maximum junction temperature.

P06P03LDG

P-Channel Enhancement Mode MOSFET

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = -250\mu A$	-30			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\mu A$	-1	-1.5	-3	
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0V, V_{GS} = \pm 20V$			± 250	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -24V, V_{GS} = 0V$			-1	μA
		$V_{DS} = -20V, V_{GS} = 0V, T_J = 125\text{ }^{\circ}C$			-10	
On-State Drain Current ¹	$I_{D(ON)}$	$V_{DS} = -5V, V_{GS} = -10V$	-30			A
Drain-Source On-State Resistance ¹	$R_{DS(ON)}$	$V_{GS} = -4.5V, I_D = -10A$		60	75	mΩ
		$V_{GS} = -10V, I_D = -12A$		37	45	
Forward Transconductance ¹	g_{fs}	$V_{DS} = -10V, I_D = -12A$		16		S
DYNAMIC						
Input Capacitance	C_{iss}	$V_{GS} = 0V, V_{DS} = -15V, f = 1MHz$		530		pF
Output Capacitance	C_{oss}			135		
Reverse Transfer Capacitance	C_{rss}			70		
Total Gate Charge ²	Q_g	$V_{DS} = 0.5V_{(BR)DSS}, V_{GS} = -10V, I_D = -12A$		10		nC
Gate-Source Charge ²	Q_{gs}			2.2		
Gate-Drain Charge ²	Q_{gd}			2		
Turn-On Delay Time ²	$t_{d(on)}$	$V_{DS} = -15V, R_L = 1\Omega$ $I_D \cong -1A, V_{GS} = -10V, R_{GS} = 6\Omega$		5.7		nS
Rise Time ²	t_r			10		
Turn-Off Delay Time ²	$t_{d(off)}$			18		
Fall Time ²	t_f			5		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS ($T_J = 25\text{ }^{\circ}C$)						
Continuous Current	I_S				-12	A
Forward Voltage ¹	V_{SD}	$I_F = -1A, V_{GS} = 0V$			-1.2	V
Reverse Recovery Time	t_{rr}	$I_F = -5A, dI_F/dt = 100A / \mu S$		15.5		nS
Reverse Recovery Charge	Q_{rr}			7.9		nC







¹Pulse test : Pulse Width $\leq 300 \mu\text{sec}$, Duty Cycle $\leq 2\%$.

²Independent of operating temperature.

P06P03LDG






P-Channel Enhancement Mode MOSFET

Typical Characteristics

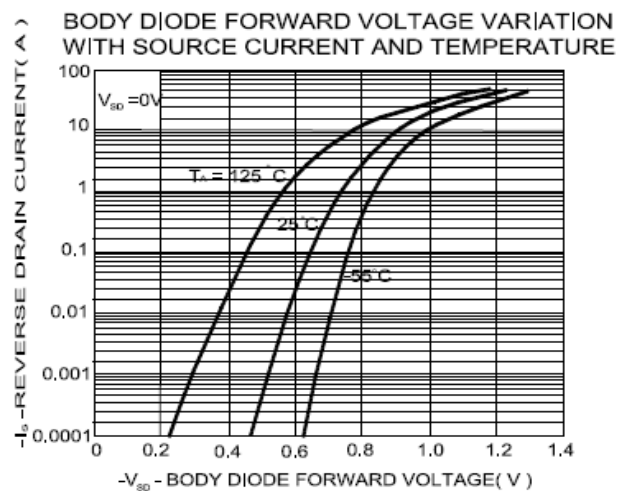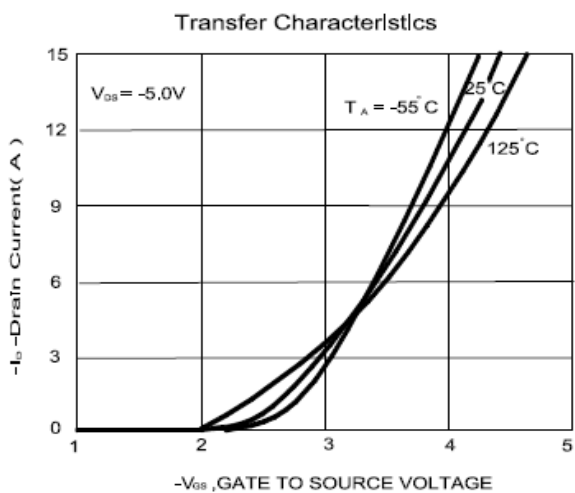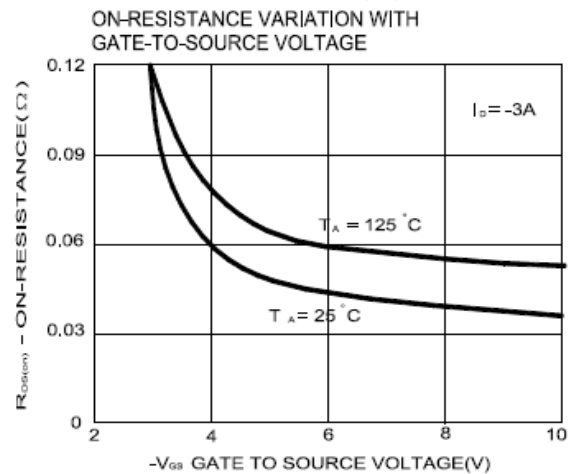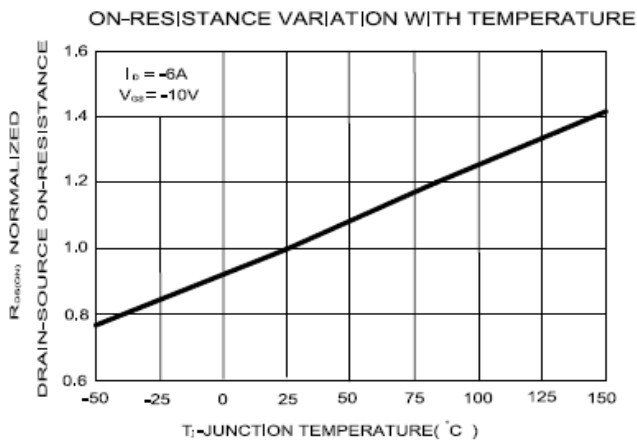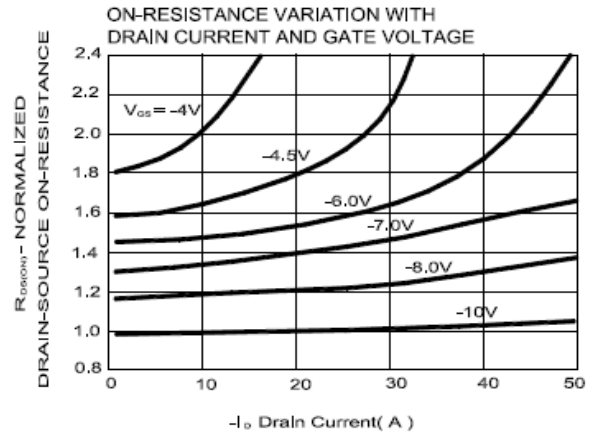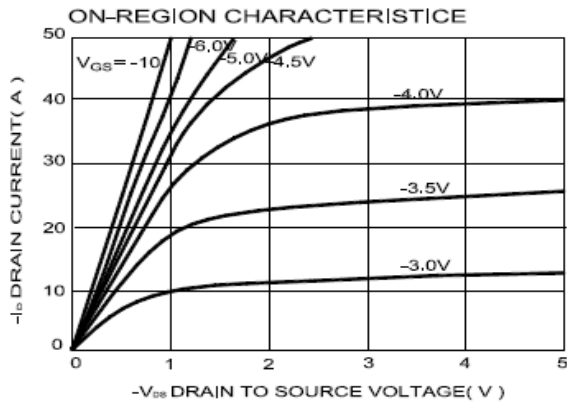

P06P03LDG

P-Channel Enhancement Mode MOSFET

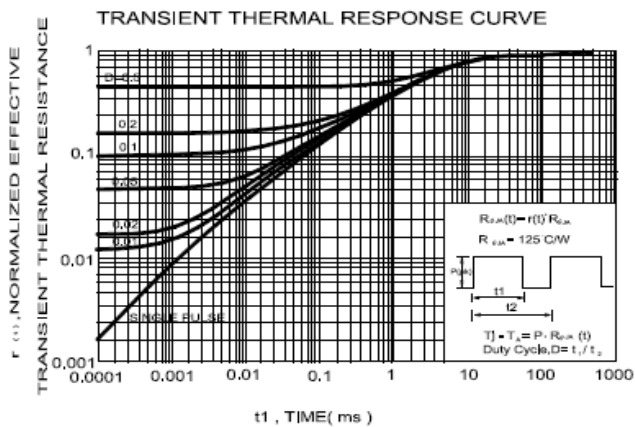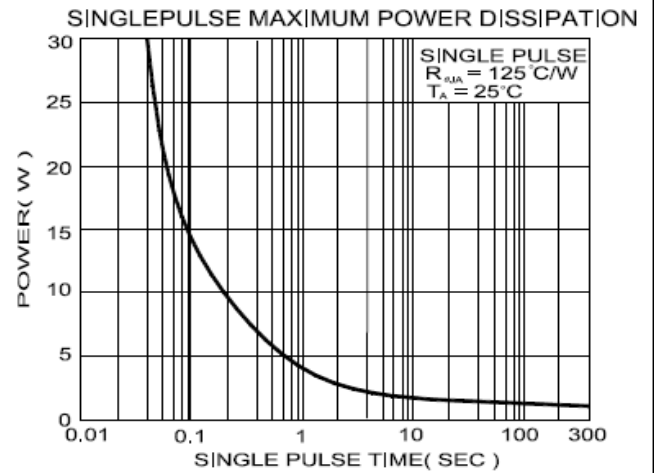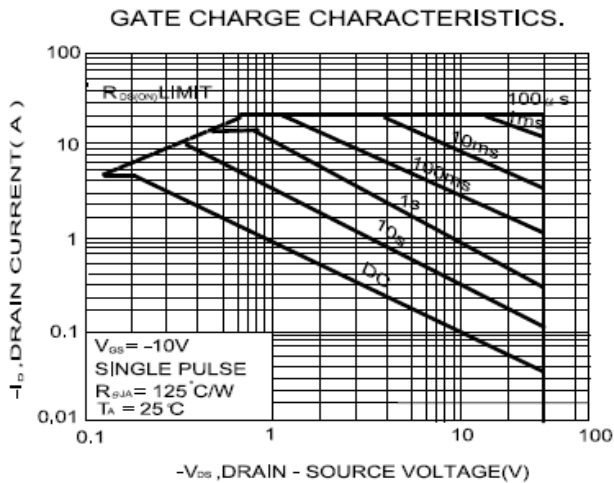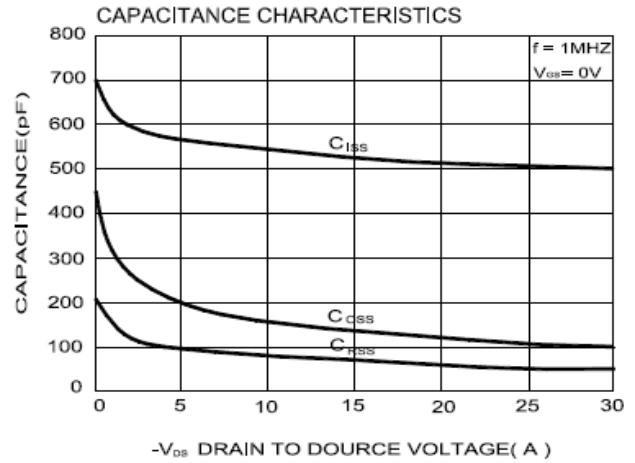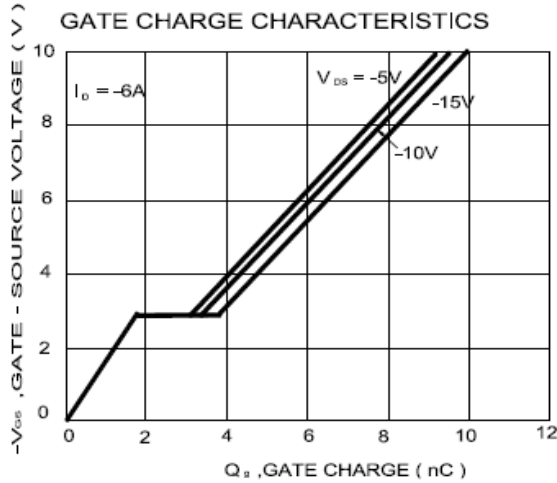

P06P03LDG

P-Channel Enhancement Mode MOSFET

Package Dimension

TO-252 (DPAK) MECHANICAL DATA

Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	8.9	10	10.41	J	4.8		5.64
B	2.1	2.2	2.5	K	0.15		1.49
C	0.4	0.5	0.61	L	0.4	0.76	0.91
D	0.82	1.2	1.5	M	4.2	4.58	5
E	0.35	0.5	0.65	S	4.57	5.1	5.52
F	0		0.2	T	3.81	4.75	5.24
G	5.3	6.1	6.3	U	1.4		1.78
H	0.5		1.7	V	0.55	1.25	1.7
I	6.3	6.5	6.8				

