



Why LEDs? Datasheets Order / RFQ Reps / Dists Media About Us Catalogs/Lit. Samples Site Map Survey

Home Datasheet Home Miniature Based Medium Based Panel PCB Discrete SMT Custom&RGB SafetyLED LED Specs [SEARCH]

Snap-In Panel Mount LED Lamps

5/32in. (4.0mm), 3/16in. (4.8mm), 1/4in. (6.4mm)

[click here to access pdf file of this page](#)

Snap-In and Bolt-On Panel Mount LED Lamps Pages:

[5/32-1/4in. Snap-In] [5/16in. Snap-In] [1/4 - 5/16in. Bolt-On] [1/2in. 1-chip Snap-In] [1/2in. multi-chip Snap-In]


Features

- Panel Mounting Diameters from 5/32" (4.0mm) to 5/16" (8.0mm)
- Long Life 100,000+ hrs (10 years)
- Solid-State, High Shock / Vibration Resistant
- Maintenance Free, Easy Installation
- Low Power Consumption, High Intensity
- Diffused or Clear Lens
- Choice of High-Efficiency or Sunlight-Visible Super Intensity
- Built-in Current Limiting Resistor
- 3-Year Warranty

Custom Options (for qualified applications)

- Special Voltages
- Special Wire Lead Lengths
- Bicolors, Tricolors, RGB, IR
- Flashing / Blinking
- High-Power Infrareads 850nm / 880nm / 940nm


5/32" (4.0mm) Snap-In Panel Mount LEDs

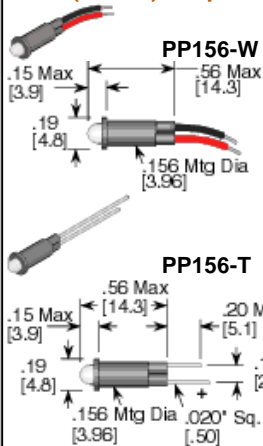

Series **PP156** **CWR3K** - **5V** - **W6** Options
 T = Terminal Type
 W6 = 6' Wire Leads

LED/Lens Type & Color		Std. Operating Voltage
Water Clear Lens (Super Intensity)	Diffused Lens (Std Intensity)	DC
CWR3K = SP Red ●	TR6 = UL Red ●	2Vf
CWO3K = SP Orange ●	TR4/5 = HE Red ●	3.5Vf
CWY3K = SP Yellow ●	TO4/5 = Orange ●	5/6V
CW900 = C. White ○	TY4/5 = Yellow ●	12/14V
CWG1K = UL Green ●	TG4/5 = HE Green ●	24V
CWAG6K = A. Green ●	TPG4/5 = P.Green ●	28V
CWB1K = SP Blue ●	TWRG4 = BiColor Red/Green ●	
CIR881 = 880nm IR ●	TWYG4 = BiColorYel/Green ●	

3/16" (4.8mm) Panel Mount LEDs with Mounting Clip

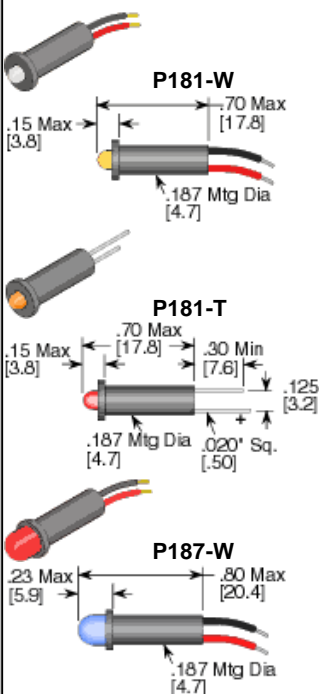


Series **P181** **CWR3K** - **5V** - **W6** Options
 P181 = 3mm
 P187 = 5mm
 T = Terminal Type
 W6 = 6' Wire Leads

LED/Lens Type & Color		Std. Operating Voltage
Water Clear Lens (Super Intensity)	Diffused Lens (Std Intensity)	DC
CWR3K = SP Red ●	TR6 = UL Red ●	2Vf
CWO3K = SP Orange ●	TR4/5 = HE Red ●	3.5Vf
CWY3K = SP Yellow ●	TO4/5 = Orange ●	5/6V
CW1K = C. White ○	TY4/5 = Yellow ●	12/14V
CWG1K = UL Green ●	TG4/5 = HE Green ●	24V
CWAG6K = A. Green ●	TPG4/5 = P.Green ●	28V
CWB1K = SP Blue ●	TWRG4 = BiColor Red/Green ●	
CIR881 = 880nm IR ●	TWYG4 = BiColorYel/Green ●	

Mounting Clip/Washer

Part No. MC187/MW187



1/4" (6.4mm) Snap-In Panel Mount LEDs

PPS251-W
 .16 Max [4.1] | .72 Max [18.3] | .30 Min [7.7] | .28 [7.2] | .125 [3.2] | .250 Mtg Dia [6.35] | .020" Sq. [.50]

PPS251-T
 .16 Max [4.1] | .72 Max [18.3] | .28 [7.2] | .250 Mtg Dia [6.35]

Series - PPS251 CWR3K - 5V - W6

LED/Lens Type & Color

Water Clear Lens (Super Intensity)		Diffused Lens (Std Intensity)		Std. Operating Voltage
CWR3K = SP Red	●	TR6 = UL Red	●	
CWO3K = SP Orange	●	TR4/5 = HE Red	●	2Vf
CWY3K = SP Yellow	●	TO4/5 = Orange	●	3.5Vf
CW1K = C. White	○	TY4/5 = Yellow	●	5/6V
CWG1K = UL Green	●	TG4/5 = HE Green	●	12/14V
CWAG6K = A. Green	●	TPG4/5 = P. Green	●	24V
CWB1K = SP. Blue	●	TWRG4 = BiColor Red/Green	●	28V
CIR881 = 880nm IR	●	TWYG4 = BiColor Yel/Green	●	

Options
 T = Terminal Type
 W6 = 6" Wire Leads

Notes: Super-Intensity Diffused LEDs Available for Special Applications



23105 Kashiwa Ct, Torrance, CA 90505 - PH: (800) 579-4875/(310) 534-1505 - FAX: (310) 534-1424
 © Copyright 1997-2001 LEDtronics, Inc. All Rights Reserved - Contact Webmaster@ledtronics.com