


P5103EMG


P-Channel Logic Level Enhancement Mode MOSFET

PRODUCT SUMMARY

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
-30V	51mΩ @ $V_{GS} = -10V$	-3.8A



SOT-23



ABSOLUTE MAXIMUM RATINGS ($T_A = 25\text{ °C}$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNITS
Drain-Source Voltage		V_{DS}	-30	V
Gate-Source Voltage		V_{GS}	±20	
Continuous Drain Current	$T_A = 25\text{ °C}$	I_D	-3.8	A
	$T_A = 70\text{ °C}$		-3	
Pulsed Drain Current ¹		I_{DM}	-20	
Power Dissipation	$T_A = 25\text{ °C}$	P_D	1	W
	$T_A = 70\text{ °C}$		0.7	
Operating Junction & Storage Temperature Range		T_J, T_{STG}	-55 to 150	°C

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE		SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Ambient ²	Steady State	$R_{\theta JA}$		117	°C / W
Junction-to-Lead	Steady State	$R_{\theta JC}$		60	

¹Pulse width limited by maximum junction temperature.

²The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25\text{ °C}$.

P5103EMG

P-Channel Logic Level Enhancement Mode MOSFET

ELECTRICAL CHARACTERISTICS (T_J = 25 °C, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNITS
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = -250μA	-30			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250μA	-1	-1.6	-3	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0V, V _{GS} = ±20V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -24V, V _{GS} = 0V			-1	μA
		V _{DS} = -20V, V _{GS} = 0V, T _J = 125 °C			-10	
Drain-Source On-State Resistance ¹	R _{DS(ON)}	V _{GS} = -4.5V, I _D = -3.5A		61	85	mΩ
		V _{GS} = -10V, I _D = -3.8A		39	51	
Forward Transconductance ¹	g _{fs}	V _{DS} = -10V, I _D = -3.8A		8.8		S
DYNAMIC						
Input Capacitance	C _{iss}	V _{GS} = 0V, V _{DS} = -15V, f = 1MHz		456		pF
Output Capacitance	C _{oss}			81		
Reverse Transfer Capacitance	C _{rss}			61		
Total Gate Charge ²	Q _g	V _{DS} = -15V, V _{GS} = -10V, I _D = -3.8A		10.3		nC
Gate-Source Charge ²	Q _{gs}			1.4		
Gate-Drain Charge ²	Q _{gd}			2.5		
Turn-On Delay Time ²	t _{d(on)}	V _{DS} = -15V I _D ≅ -3.8A, V _{GEN} = -10V, R _{GS} = 6Ω		21		nS
Rise Time ²	t _r			23		
Turn-Off Delay Time ²	t _{d(off)}			95		
Fall Time ²	t _f			44		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTIC (T_J = 25 °C)						
Continuous Current	I _S				-0.9	A
Forward Voltage ¹	V _{SD}	I _F = -3.8A, V _{GS} = 0V			-1.1	V
Reverse Recovery Time	t _{rr}	I _F = -3.8A, dI _F /dt = 100A /μS		12		nS
Reverse Recovery Charge	Q _{rr}				4.3	


¹Pulse test : Pulse Width ≤ 300 μsec, Duty Cycle ≤ 2%.

²Independent of operating temperature.

³Pulse width limited by maximum junction temperature.





P5103EMG

P-Channel Logic Level Enhancement Mode MOSFET

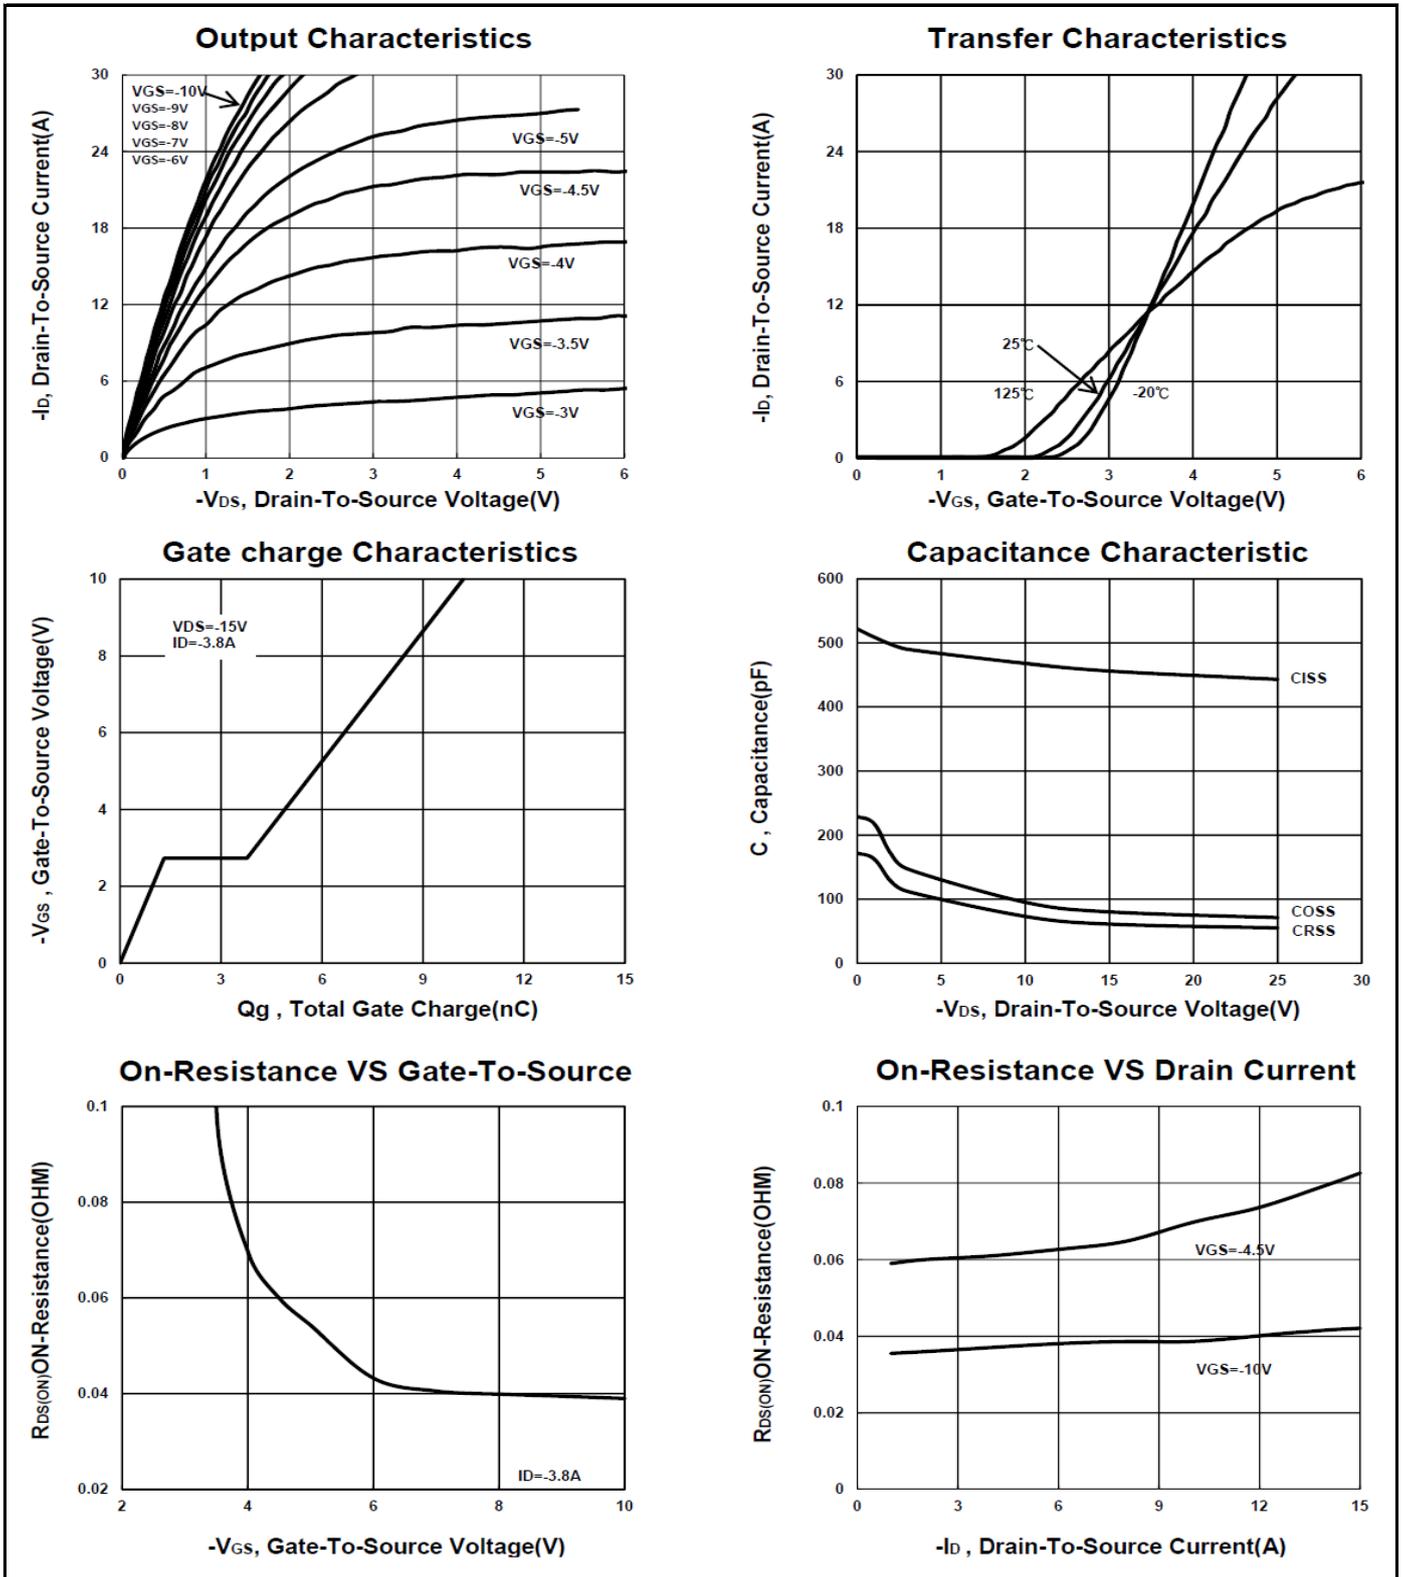


P5103EMG

P-Channel Logic Level Enhancement Mode MOSFET

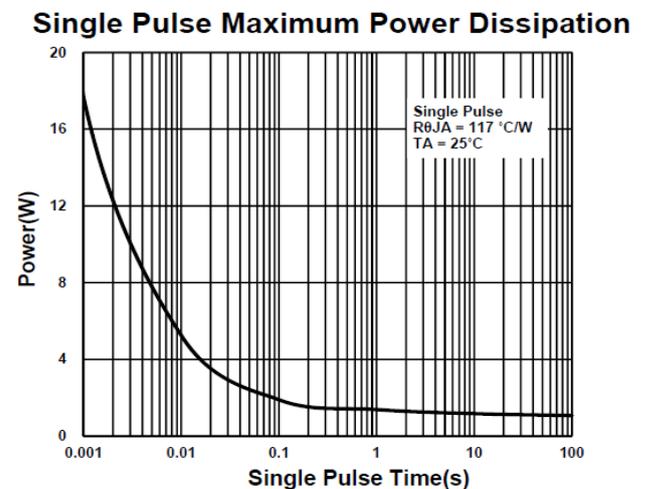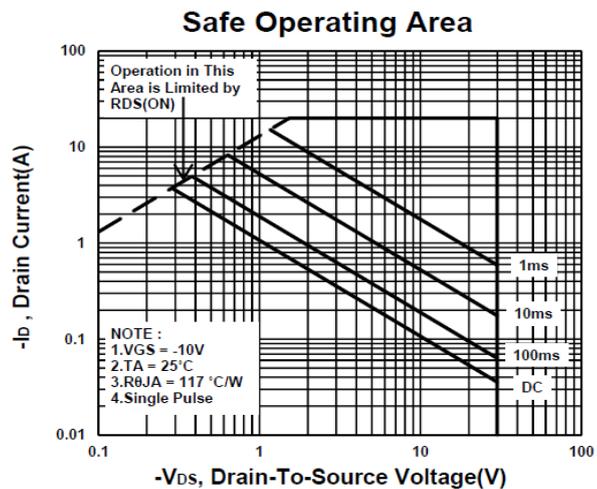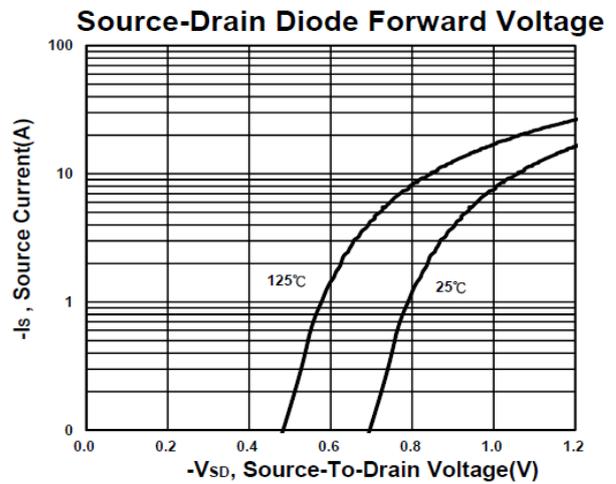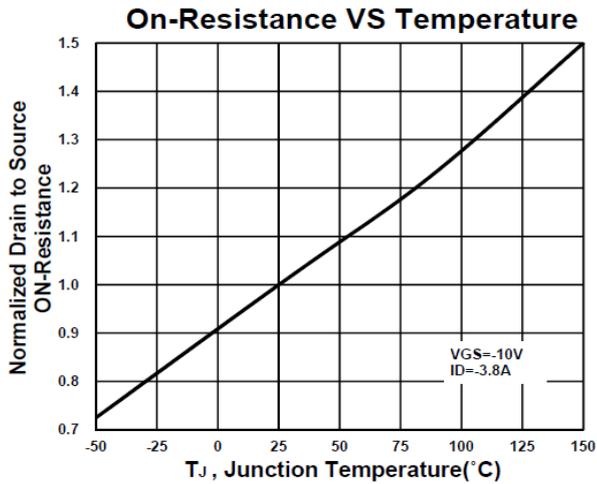

Transient Thermal Response Curve

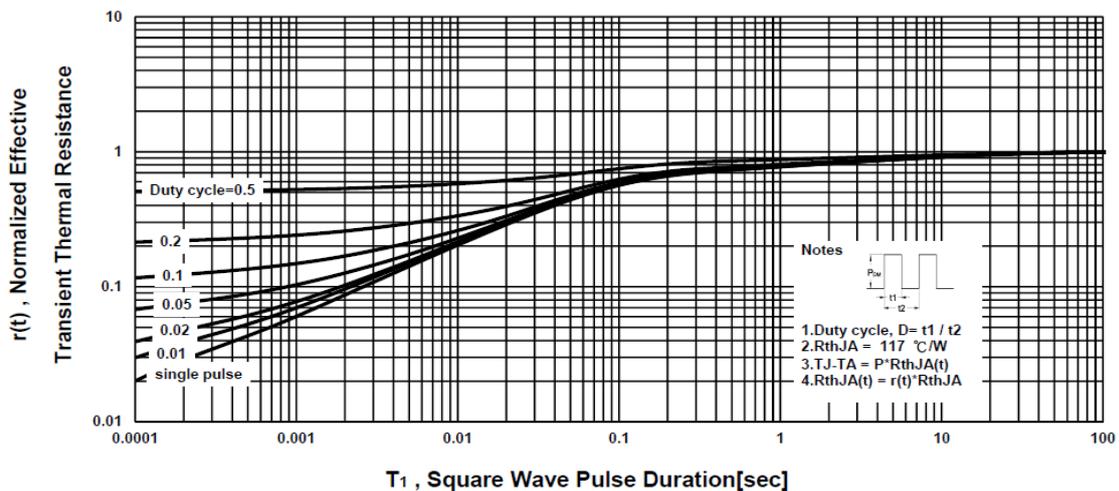


P5103EMG

P-Channel Logic Level Enhancement Mode MOSFET

Package Dimension

SOT-23-3 MECHANICAL DATA


Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A		1.05		H	0.1		0.2
B	2.4		3	I	0.3		0.6
C	1.4		1.73				
D	2.7		3.1				
E	1		1.31				
F	0		0.15				
G	0.3		0.5				

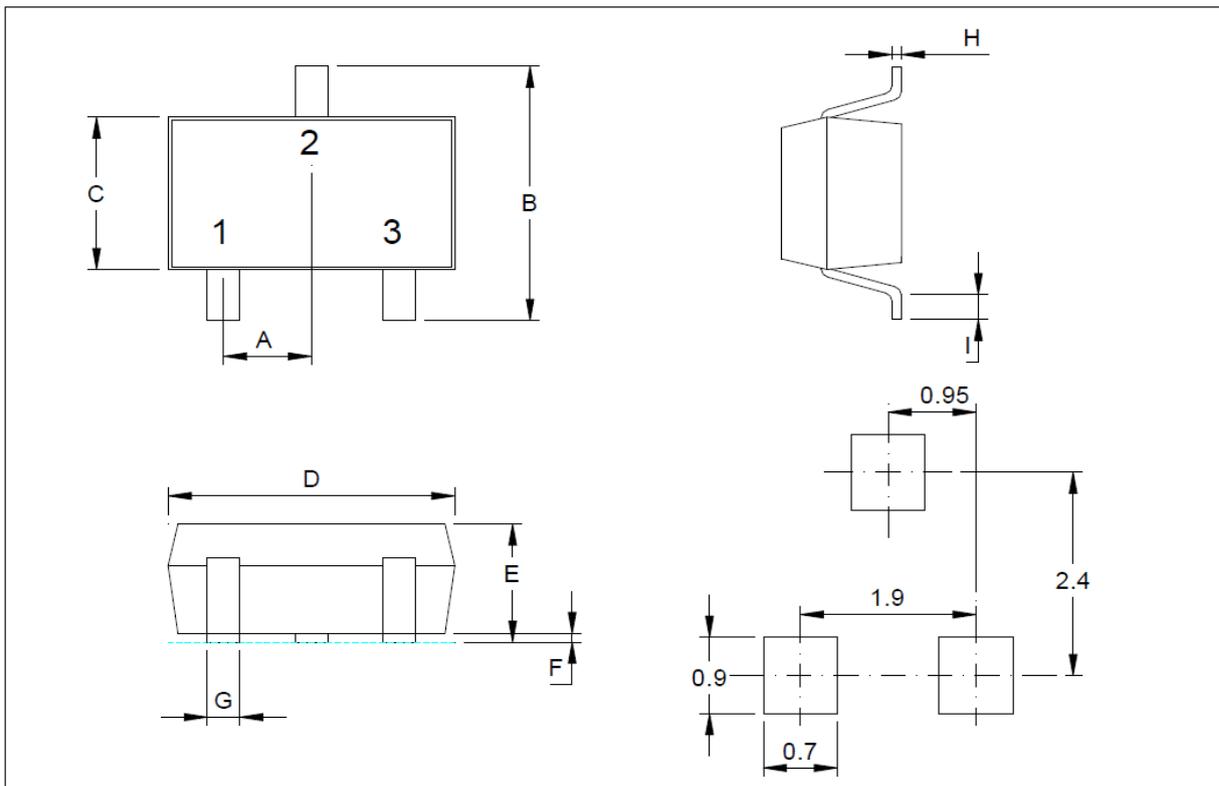


P5103EMG

P-Channel Logic Level Enhancement Mode MOSFET

A. Marking Information (此产品代码为：25)

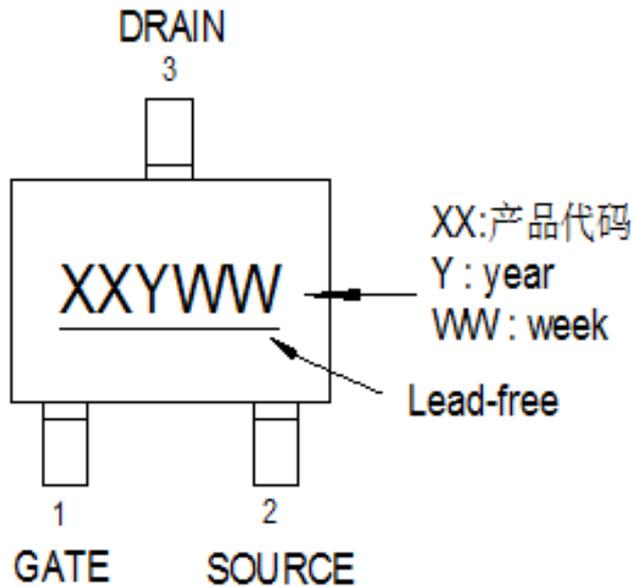

B. Tape&Reel Information:3000pcs/Reel

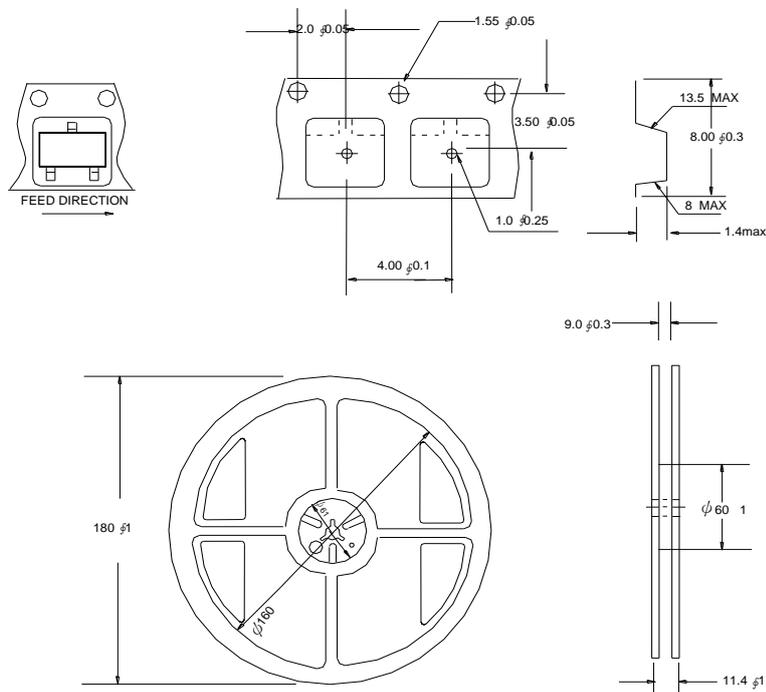


P5103EMG
P-Channel Logic Level Enhancement Mode MOSFET

C. Lot.No. & Date Code rule


1.LOT.NO.

M N 15M21 03

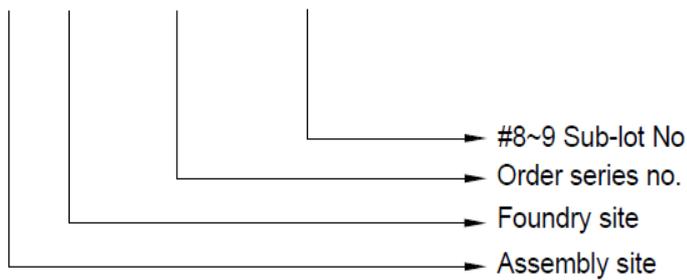


2.Date Code

D Y M X XXX

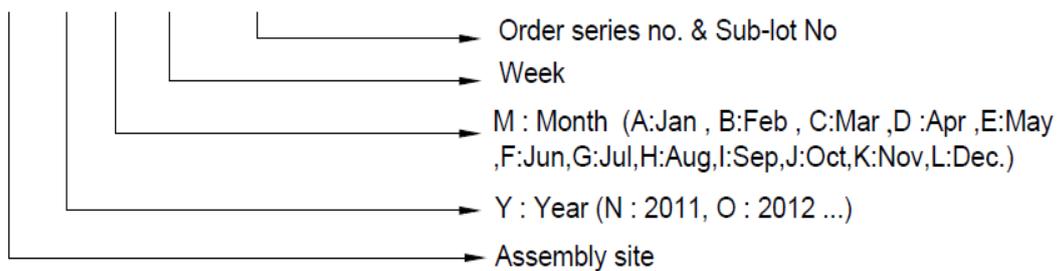

3.Date Code (for Small package)

XX Y WW

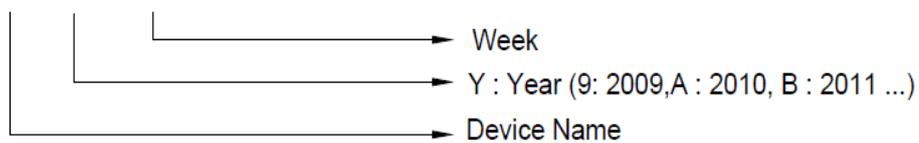

P5103EMG

P-Channel Logic Level Enhancement Mode MOSFET

D.Label rule

标签内容(Label content)



1	Label Size	30 * 90 mm
2	Font style	Times New Roman or Arial (或可区分英文”0”和数字”0”，”G和”Q”的字型即可)
3	Great Power	Height: 4 mm
4	Package	Height: 2 mm
5	Date	Height: 2 mm Shipping date: YYYY/MM/DD, ex. 2008/09/12
6	Device	Height: 3 mm (Max: 16 Digit)
7	Lot	Height: 3 mm (Max: 9 Digit) Sub lot
8	D/C	Height: 3 mm (Max: 7 Digit)
9	QTY	Height: 3 mm (Max: 6 Digit) Thousand mark is no needed
10	Pb Free label	 Diameter: 1 cm bottom color: Green Font color: Black Font style: Arial
11	Halogen Free label	 Diameter: 1 cm bottom color: Green Font color: Black Font style: Arial
12	Scan info	Device / Lot / D/C / QTY , Insert “ / “ between every parts. for example: P3055LDG/G12345601/GGG2301/2000 DPI (Dots per inch): Over 300 dpi Code : Code 128 Height: 6 mm at least