



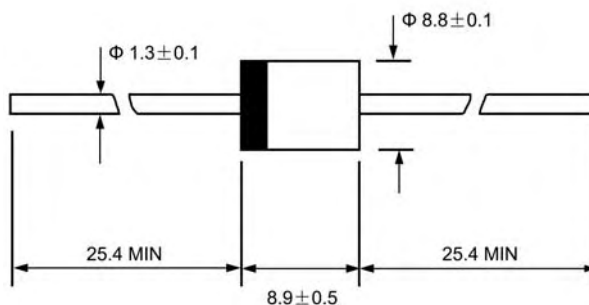
R - 6

Features

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

Mechanical Data

- ◇ Case: JEDEC R-6, molded plastic
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.072 ounces, 2.04 grams
- ◇ Mounting position: Any



Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

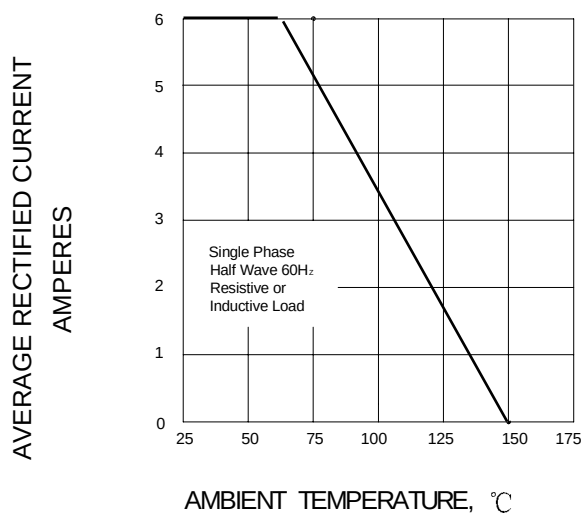
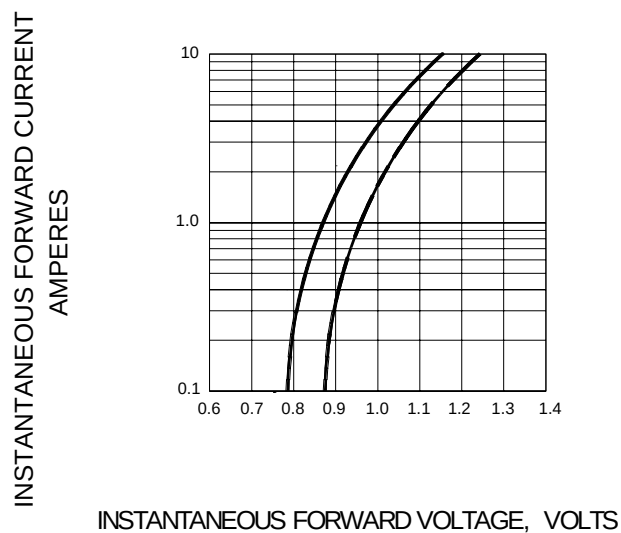
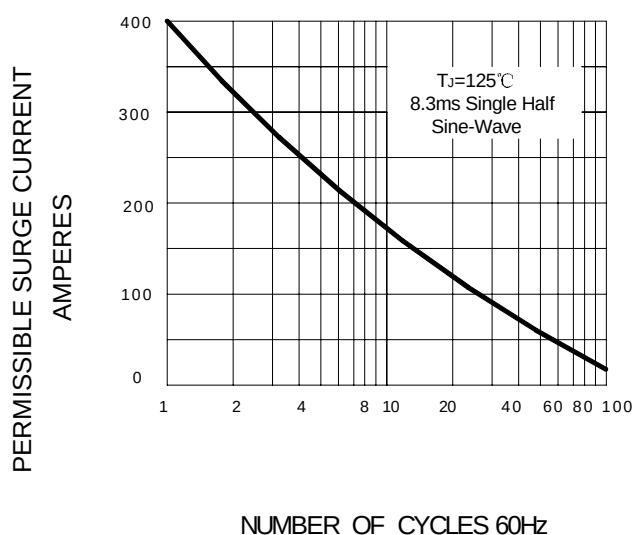
Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		P600 A	P600 B	P600 D	P600 G	P600 J	P600 K	P600 M	P600 S	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	1200	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	840	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	1200	V
Maximum average forw ard rectified current 9.5mm lead length, @T _A =60°C	I _{F(AV)}	6.0								A
Peak forw ard surge current 8.3ms single half-sine-wave superimposed on rated load @T _J =125°C	I _{FSM}	400								A
Maximum instantaneous forw ard voltage @ 6.0 A	V _F	0.9						1.0		V
Maximum reverse current @T _A =25°C at rated DC blocking voltage @T _A =100°C	I _R	5.0 1000								μ A
Typical junction capacitance (Note1)	C _J	150								pF
Typical thermal resistance (Note2)	R _{θJA}	20								°C/W
Operating junction temperature range	T _J	-55----+150								°C
Storage temperature range	T _{STG}	-55----+150								°C

NOTE: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Thermal resistance from junction to ambient.

Ratings AND Characteristic Curves

FIG.1 -- FORWARD DERATING CURVE

FIG.2 -- TYPICAL FORWARD CHARACTERISTIC

FIG.3 - PEAK FORWARD SURGE CURRENT

FIG.4 -- TYPICAL JUNCTION CAPACITANCE
