

Version : Preliminary

<p style="text-align: center;">TECHNICAL SPECIFICATION</p> <p style="text-align: center;">MODEL NO. : P64CV1</p>
--

Customer's Confirmation

Date _____

By _____

PVI's Confirmation

Confirmed By _____

Prepared By _____

Date : JUN. 29, 1999

This technical specification is subject to change without notice.
Please return 1 copy with your signature on this page for approval.

TECHNICAL SPECIFICATION

CONTENTS

<i>NO.</i>	<i>ITEM</i>	<i>PAGE</i>
-	Cover(P64CV1)	1
-	Contents	2
1	Application	3
2	Features	3
3	Mechanical Specifications	3
4	Mechanical Drawing of TFT-LCD module	4
5	Input / Output Terminals	5
6	Absolute Maximum Ratings	7
7	Electrical Characteristics	7
8	Optical Characteristics	16
9	Reliability Test	18
10	Block Diagram	19
-	Revision History	20

1. Application

This technical specification applies to 6.4" color TFT-LCD module, P64CV1.

2. Features

- . Compatible with VGA-480, VGA-400, VGA-350 and freedom mode.
- . Pixel in stripe configuration
- . Slim and compact
- . Display Colors : 262,144 colors
- . Image Reversion : Up/Down and Left/Right
- . Active area / Outline area = 62.3 %
- . Viewing Direction : 6 o'clock

3. Mechanical Specifications

Parameter	Specifications	Unit
Screen Size	6.4 (diagonal)	inch
Display Format	640×R, G, B×480	dot
Active Area	129.6(H)×97.44 (V)	mm
Dot Pitch	0.0675 (H)×0.203 (V)	mm
Pixel Pitch	0.203 (H)×0.203 (V)	mm
Pixel Configuration	Stripe	
Outline Dimension	168.9 (w)×120(H)×13 (D)	mm
Weight	310	g

4. Mechanical Drawing of TFT-LCD Module
Sees attach file of this technical specification.

5. Input / Output Terminals
5-1) TFT-LCD Panel Driving

Pin No.	Symbol	Function	Remark
1	CLK	Clock Signal for Sampling Image Digital Data	
2	Hsync	Horizontal Synchronous Signal	Note 5-1
3	Vsync	Vertical Synchronous Signal	Note 5-1
4	GND	Ground (0V)	
5	R0	Red Image Data Signal (LSB)	
6	R1	Red Image Data Signal	
7	R2	Red Image Data Signal	
8	R3	Red Image Data Signal	
9	R4	Red Image Data Signal	
10	R5	Red Image Data Signal (MSB)	
11	GND	Ground (0V)	
12	G0	Green Image Data Signal (LSB)	
13	G1	Green Image Data Signal	
14	G2	Green Image Data Signal	
15	G3	Green Image Data Signal	
16	G4	Green Image Data Signal	
17	G5	Green Image Data Signal (MSB)	
18	GND	Ground (0V)	
19	B0	Blue Image Data Signal (LSB)	
20	B1	Blue Image Data Signal	
21	B2	Blue Image Data Signal	
22	B3	Blue Image Data Signal	
23	B4	Blue Image Data Signal	
24	B5	Blue Image Data Signal (MSB)	
25	GND	Ground (0V)	
26	DENB	Signal to Select the Horizontal Display Position	Note 5-2
27	VCC	DC +5.0V Power Supply	
28	VCC	DC +5.0V Power Supply	
29	R/L	Horizontal Image Shift-direction Select Signal	Note 5-3
30	U/D	Vertical Image Shift-direction Select Signal	Note 5-4



Note 5-1 : The TFT-LCD module is compatible with four kinds of VGA timing. They are VGA-480, VGA-400, VGA-350 and freedom mode. The polarization of Hsync and Vsync determine the timings.

	VGA-480	VGA-400	VGA-350	Freedom Mode
Hsync Polarization	Negative	Negative	Positive	Positive
Vsync Polarization	Negative	Positive	Negative	Positive

Note 5-2 : DENB is the signal to generate horizontal sampling start pulse. When the rising edge of DENB comes, the source driver ICs will reference the starting edge to create image sampling data. If DENB keeps low, the position of starting pulse will be the default value of the module.



Note 5-3 : R/L is the Right/Left shift signal. The default value of the system is High.

- (1). R/L= Open or High, U/D= Open or High (2). R/L= Low, U/D= Open or High

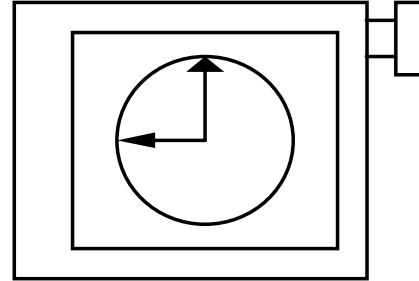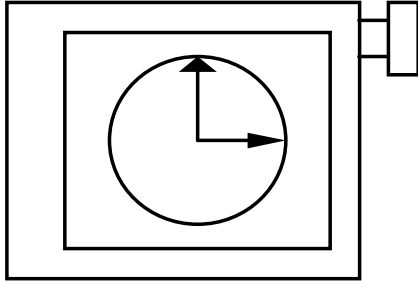

Note 5-4 : U/D is the Up/Down shift signal. The default value of the system is High

- (1). R/L= Open or High, U/D= Open or High (2). R/L= Open or High, U/D= Low

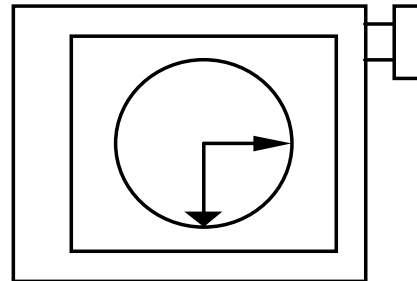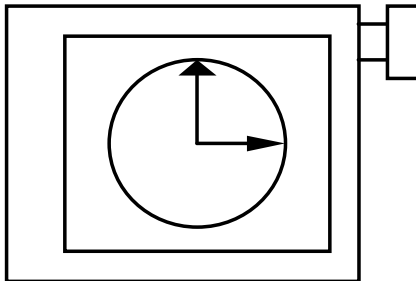

5-2) Backlight driving

PIN NO.	Symbol	Description	Remark
1,2	V_{in}	8.0V~18.0V	
3	V_{adj}	Brightness Control(0.2V~2.0V)	Note 5-5
4,5	GND	-	
6	ENABLE	5V(ON), GND(OFF)	

Note 5-5: $V_{adj}=0.2V$ has higher backlight brightness. As the value of V_{adj} increases, backlight brightness and power consumption decrease. When $V_{adj}=2.0V$, backlight brightness is lower than others.

5-3) Input / Output Connector

A) LCD module connector (Reference)

Molex 52437-3091

Down Connector

Pin No. : 30

Pitch : 0.5 mm

B) Backlight connector

HRS DF13-6P-1.25H

Pin No. : 6

Pitch : 1.25 mm

6. Absolute Maximum Ratings:

GND=0V,

 $T_a=25^{\circ}\text{C}$

Parameters	Symbol	MIN.	MAX.	Unit	Remark
+5V Supply Voltage	V_{CC}	0.0	+6.0	V	
Input Signals Voltage	V_{sig}	-0.3	$V_{CC}+0.3$	V	Note 6-1
Storage Temperature	T_{stg}	-30	+80	$^{\circ}\text{C}$	Note 6-2
Operating Temperature	T_{opa}	-10	+60	$^{\circ}\text{C}$	

Note 6-1: Input signals include CLK, Hsync, Vsync, DENB, R[0:5], G[0:5] and B[0:5].

Note 6-2: Humidity : 95% RH Max. at $T_a \leq 40^{\circ}\text{C}$.

Maximum wet-bulb temperature is at 39°C or less at $T_a > 40^{\circ}\text{C}$.

No condensation.

7. Electrical Characteristics
7-1) Recommended Operating Conditions:

A) Driving for TFT-LCD panel

 $\text{GND} = 0\text{V}, T_a = 25^{\circ}\text{C}$

Parameters	Symbol	Min.	Typ.	Max.	Unit	Remark
+5V Supply Voltage	V_{CC}	+4.75	+5.0	+5.25	V	
Supply Input Ripple Voltage	V_{CCRP}			0.1	Vp-p	$V_{CC}=+5\text{V}$
Input Signals Voltage (High)	V_{IH}	+2.6			V	
Input Signals Voltage (Low)	V_{IL}			+0.5	V	

B) Driving for backlight

Parameters	Symbol	Min	Typ.	Max	Unit	Remark
Input voltage	V_{in}	8	12.0	18.0	V	
Input Current	I_{in}				mA	
Brightness (Tube) current	I_o (Min)	1.5	2.0	2.5	mArms	$V_{adj}=2\text{V}$ $I_o=10\sim 30\text{mA}$
	I_o (Max)	5.5	6.0	6.5	mArms	$V_{adj}=0.2\text{V}$ $I_o=10\sim 30\text{mA}$
Oscillation	F	44	50	56	KHz	$V_{adj}=2\text{V}$ $V_{in}=12\text{V}$
Lamp Life Time	L_L		10,000		hours	

- ON/OFF control signal

Input control signal for DC to AC inverter, which is system power saving control input.

High

level ($2.5\text{V} \leq \text{ON/OFF} \leq 5\text{V}$) denoted system in normal operation, low level ($\text{ON/OFF} \leq 0.8\text{V}$) denoted system shut-off.

7-2) Power Consumption

Parameters	Symbol	Typ.	Max.	Unit	Remark
+5V Current Dissipation	I_{CC}	500	600	mA	Note 7-1
Input Signals Current (High)	I_{IH}		100	μA	$V_{IH} = +5V$
Input Signals Current (Low)	I_{IL}		100	μA	$V_{IL} = 0V$
LCD Panel Power Consumption		2.5		W	Note 7-2
Backlight Power Consumption		6.0		W	Note 7-3, $V_{adj} = 0.2V$
Total Power Consumption		8.5		W	

Note 7-1 : The power dissipation of DC +5V measures from Lattice iSPLSI1032E -LT70 FPGA Control IC. If user replaces the control IC from Lattice iSPLSI1032E-LT70 FPGA to ASIC, the power consumption will decrease.

Note 7-2 : The power consumption of backlight is not included.

Note 7-3 : Backlight lamp power consumption is calculated by $I_L \times V_L$.


7-3) Input / Output signal timing chart

Parameters	Symbol	Format	Min.	Typ.	Max.	Unit	Note	
Frequency	$F_c = 1/T_c$	All		25.175		MHz	Note 7-4	
Clock	High Time	Tckh	10			ns		
	Low Time	Tckl	10			ns		
	Periodic = Line	Thp		31.778		μs	Note 7-4	
Hsync				800	1024	clock	Note 7-4	
	Pulse Width	Thpw	2	96	200	clock		
	Back Porch	Thbp	2	48	64	clock		
		VGA-480	515	525	1024	line	Note 7-4	
	Periodic = Frame	Tvp	VGA-400	447	449	1024	line	Note 7-4
		VGA-350	447	449	1024	line	Note 7-4	
Vsync		Freedom Mode			1024	line		
	Pulse Width	Tvpw	All	1	2	line		
	Back Porch	Tvbp	All	1		64	line	
Data	Setup Time	Tds	All	10		ns		
	Hold Time	Tdh	All	10		ns		
	Periodic = Line	Tep	All		800	1024	clock	
	Pulse Width (H)	Tepw	All	2	640	800	clock	
DENB		VGA-480	480	480		line		
	Display Line No(V)	Tvd	VGA-400	400	400	line		
		VGA-350	350	350		line		
		Freedom Mode		480		line		
Horizontal Display Periodic		Thd	All	640	640	640	clock	
Hsync-CLK Phase Difference		Thc	All	10		Tc-10	ns	
Vsync-Hsync Phase Difference		Tvh	All	1		Thp-1	clock	


Note 7-4 : T_c is the period of sampling clock. In case of low-frequency, the image-flicker may occur.

7-4) Display Time Range


(1) Vertical Timing :

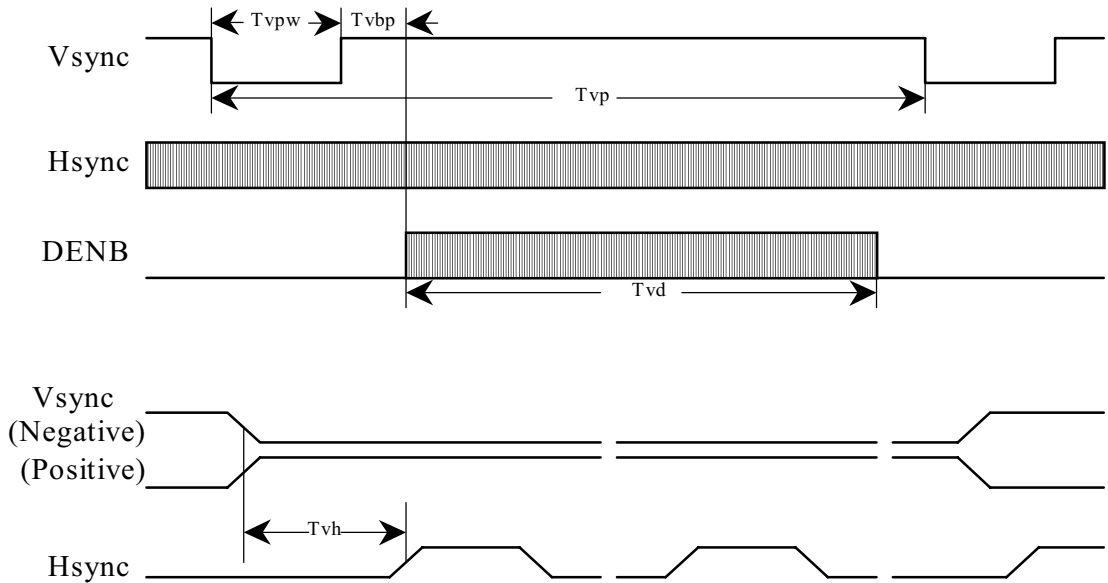

(2) Horizontal Timing :

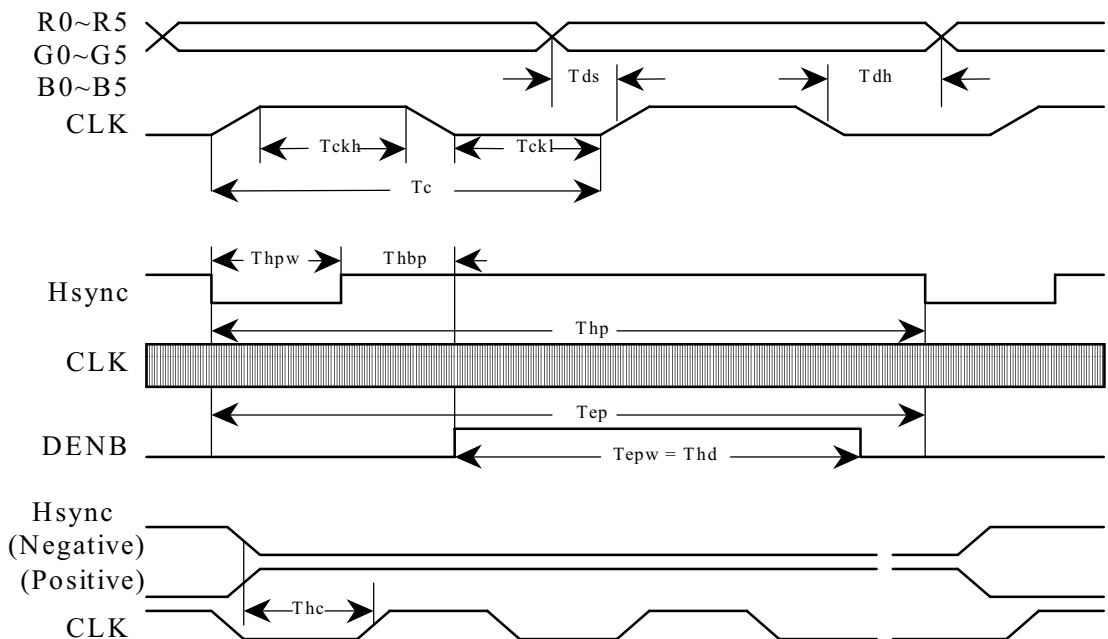

(3). Detail of Horizontal Timing :

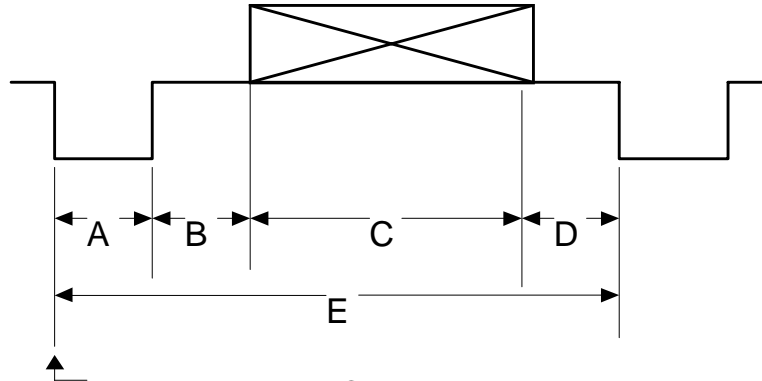

(a). VGA-480 Mode (Hsync = Negative Polarization)

Item	Description	Clock Cycles	Time
A	Horizontal Width	96	3.813 μ s
B	Horizontal B-Porch	48	1.907 μ s
C	Horizontal Display	640	25.422 μ s
D	Horizontal F-Porch	16	0.636 μ s
E	Horizontal Total	800	31.778 μ s

(b). VGA-400 Mode (Hsync = Negative Polarization)

Item	Description	Clock Cycles	Time
A	Horizontal Width	96	3.813 μ s
B	Horizontal B-Porch	48	1.907 μ s
C	Horizontal Display	640	25.422 μ s
D	Horizontal F-Porch	16	0.636 μ s
E	Horizontal Total	800	31.778 μ s

(c). VGA-350 Mode (Hsync = Positive Polarization)


Item	Description	Clock Cycles	Time
A	Horizontal Width	96	3.813 μ s
B	Horizontal B-Porch	48	1.907 μ s
C	Horizontal Display	640	25.422 μ s
D	Horizontal F-Porch	16	0.636 μ s
E	Horizontal Total	800	31.778 μ s

(d). Free Format (Hsync = Positive Polarization)

Item	Description	Clock Cycles	Time
A	Horizontal Width	Note 7-4	---
B	Horizontal B-Porch	Note 7-4	---
C	Horizontal Display	Note 7-4	---
D	Horizontal F-Porch	Note 7-4	---

E	Horizontal Total	< 1024	---
---	------------------	--------	-----

(4). Detail of Vertical Timing :

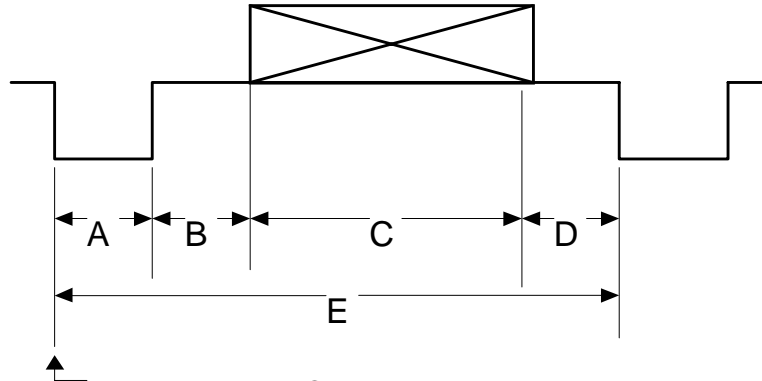

(a). VGA-480 Mode (Vsync = Negative Polarization)

Item	Description	Horizontal Lines	Time
A	Vertical Width	2	63.5 μ s
B	Vertical B-Porch	33	1.049 ms
C	Vertical Display	480	15.253 ms
D	Vertical F-Porch	10	317.8 μ s
E	Vertical Total	525	16.683 ms

(b). VGA-400 Mode (Vsync = Negative Polarization)

Item	Description	Horizontal Lines	Time
A	Vertical Width	2	63.5 μ s
B	Vertical B-Porch	35	1.112 ms
C	Vertical Display	400	12.711 ms
D	Vertical F-Porch	12	381.0 μ s
E	Vertical Total	449	14.268 ms

(c). VGA-350 Mode (Vsync = Positive Polarization)

Item	Description	Horizontal Lines	Time
A	Vertical Width	2	63.5 μ s
B	Vertical B-Porch	60	1.907 ms
C	Vertical Display	350	11.122 ms
D	Vertical F-Porch	37	1.176 μ s
E	Vertical Total	449	14.268 ms

(d). Free Format (Vsync = Positive Polarization)

Item	Description	Horizontal Lines	Time
A	Vertical Width	Note 7-4	---
B	Vertical B-Porch	Note 7-4	---
C	Vertical Display	Note 7-4	---
D	Vertical F-Porch	Note 7-4	---
E	Vertical Total	< 1024	---

7-5) Horizontal Display Position

Horizontal display position depends on the signal of DENB and the input digital image. As the rising edge of DENB signal comes, LCD module will create a horizontal sampling start pulse. At this time, the source driver ICs begin to sample image data and transfer the digital image data to analogue image data by D/A inverters. Then send the analogue image signal to the right position of active display area of the LCD panel. If DENB is low, LCD module will set horizontal display position in default value.


Parameters		Symbol	Format	Min.	Typ.	Max.	Unit	Remark
DENB	Setup Time	Tes	All	10		Tc-10	ns	
	Hold Time	Teh	All	10		Tc-10	ns	
	Pulse Width	Tepw	All	2	640	720	clock	
DENB	Horizontal		VGA-480		144		clock	
Keep	Sampling	Thss	VGA-400		144		clock	
At	Start		VGA-350		144		clock	
“Low”	Pulse Position		Free Format	128		192	clock	Note 7-5
Hsync-DENB Phase Difference		The	All	96		160	clock	

Note 7-5: In free format condition (Hsync = Positive, Vsync = Positive), if DENB is low, the position of horizontal sampling start pulse depends on the seven control lines of HP[6:0] Lattice iSPLSI1032E-LT70 FPGA. The starting position is the count of { 128 + Data(HP[6:0]) } clock.


7-6) Vertical Display Position

Mode	Hsync	Vsync	V-Start Position	V-Display	Remark
VGA-480	Negative	Negative	34	480 lines	
VGA-400	Negative	Positive	17	400 lines	Note 7-6
VGA-350	Positive	Negative	30	350 lines	Note 7-7
Freedom Mode	Positive	Positive	24	480 lines	

Note 7-6: As the format is VGA-400(Hsync = Negative, Vsync = Positive), LCD module will adjust the display area to the center of display. At this time, both of the upper and lower display areas have 40 blanking lines (the display color is black). The actual display area is center 400 lines.

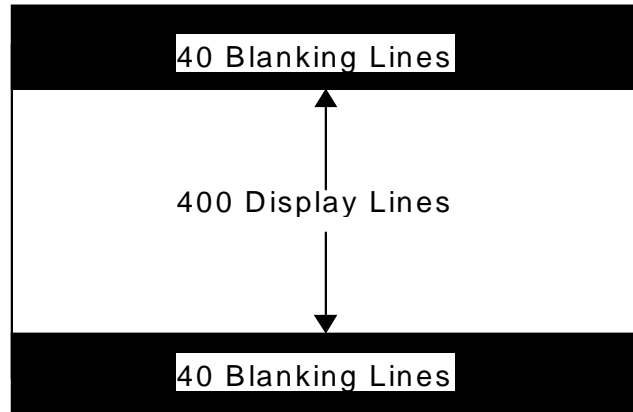


Note 7-7: As the format is VGA-350(Hsync = Negative, Vsync = Positive), LCD module will adjust the display area to the center of display. At this time, both of the upper and lower display areas have 65 blanking lines (the display color is black). The actual display area is center 350 lines.

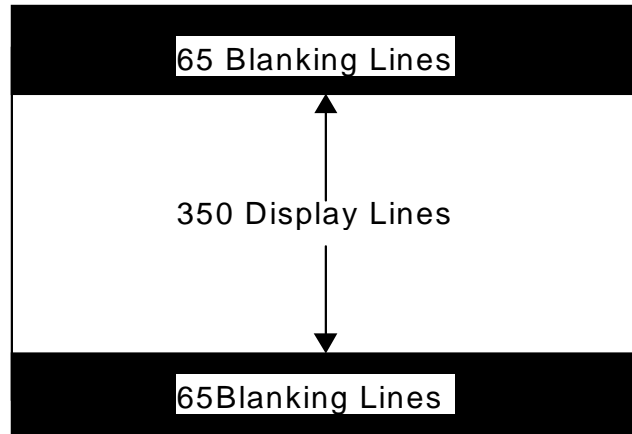

7-6) Pixel Arrangement

The LCD module pixel arrangement is the stripe.

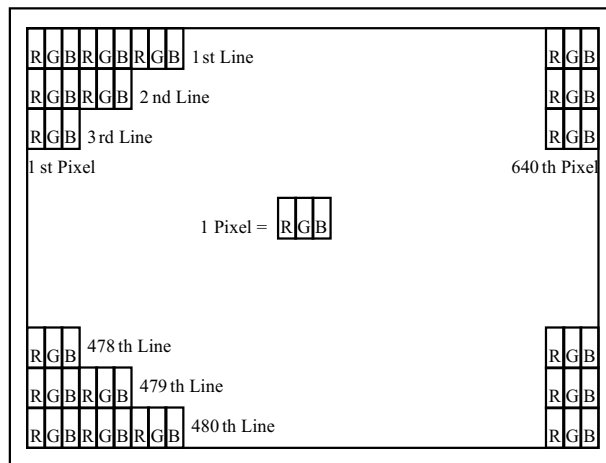

7-7) Display Color and Gray Scale Reference

Color		Input Color Data																	
		Red						Green						Blue					
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red	Red (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red (02)	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker																		
	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
	Brighter																		
	Red (61)	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red (62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
Red (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	
Green	Green (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green (01)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	Green (02)	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	Darker																		
	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
	Brighter																		
	Green (61)	0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0	0	0
	Green (62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
Green (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	
Blue	Blue (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue (01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue (02)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	Darker																		
	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
	Brighter																		
	Blue (61)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	1
	Blue (62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
Blue (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	

7-8)Control Board Dip Switch Format

SW1

Item	Definition	Condition		Default	Remark
		ON	OFF		
SW 1-1	U/D	Normal	Control By User	OFF	
SW 1-2	R/L	Normal	Control By User	OFF	
SW 1-3	GSTH	HS Inverse	Normal	OFF	Note 7-8
SW 1-4	GSTV	VS Inverse	Normal	OFF	Note 7-8
SW 1-5	CKPOL	CLK Inverse	Normal	ON	Note 7-8
SW 1-6	HP0	Line Shift(1 Line)	Normal	ON	

SW2

Item	Definition	Condition		Default	Remark
		ON	OFF		
SW 2-1	HP1	Line Shift(2 Line)	Normal	ON	
SW 2-2	HP2	Line Shift(4 Line)	Normal	OFF	
SW 2-3	HP3	Line Shift(8 Line)	Normal	OFF	
SW 2-4	HP4	Line Shift(16 Line)	Normal	ON	
SW 2-5	HP5	Line Shift(32 Line)	Normal	ON	
SW 2-6	HP6	Line Shift(64 Line)	Normal	ON	

Note:7-8:The SW 1-3,SW 1-4,SW 1-5 con not change by user.

8. Optical Characteristics
8-1) Specification:
 $T_a = 25^{\circ}\text{C}$

Parameter		Symbol	Condition	MIN.	TYP.	MAX.	Unit	Remarks
Viewing Angle	Horizontal	θ	$CR \geq 10$	± 45	± 55		deg	Note 8-3
	Vertical	θ (to 12 o'clock)		30	35		deg	
		θ (to 6 o'clock)		10	15		deg	
Contrast Ratio		CR		100	120			Note 8-1
Response time	Rise	Tr	$\theta = 0^{\circ}$			30	ms	
	Fall	Tf				50	ms	
Brightness			$V_{adj}=0.2V$	300	350		cd/m^2	Note 8-2
Cross Talk			$\theta = 0^{\circ}$			3.5	%	Note 8-4
White Chromaticity		x			0.291			Note 8-2
		y			0.315			
Lamp Life Time				10,000			hr	

Note 8-1 : $CR = \frac{\text{Luminance when LCD is White}}{\text{Luminance when LCD is Black}}$

Contrast Ratio is measured in optimum common electrode voltage.

Note 8-2 : Topcon BM-7(fast) luminance meter 2° field of view is used in the testing (after 20~30 minutes' operation).

Backlight brightness control voltage $V_{adj}=0.2V$.

Note 8-3 : The definitions of viewing angle diagrams see section 8-2.

Note 8-4: Cross Talk (CTK) = $\frac{|YA-YB|}{YA} \times 100\%$


YA: Brightness of Pattern A

YB: Brightness of Pattern B
Pattern A


(Gray Level 46)

Pattern B

(Gray Level 46, central
black box exclusive)

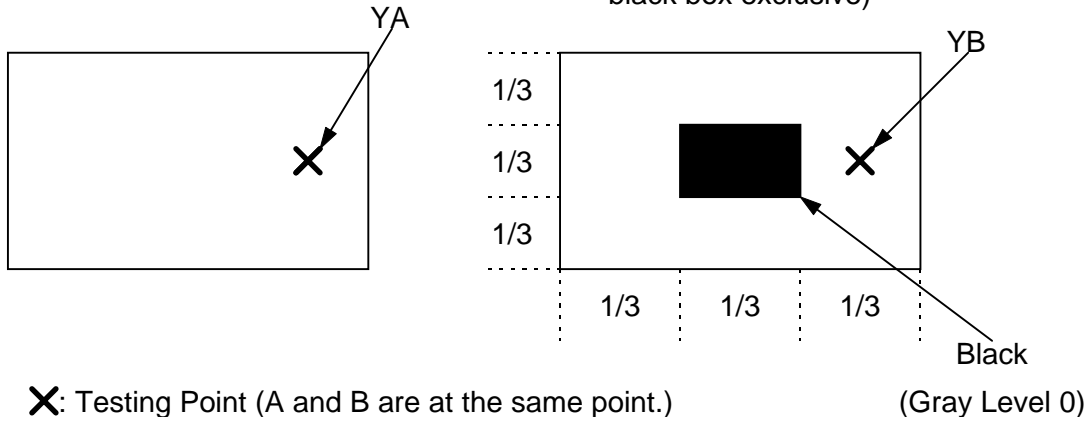

8-2) View Angle Diagram

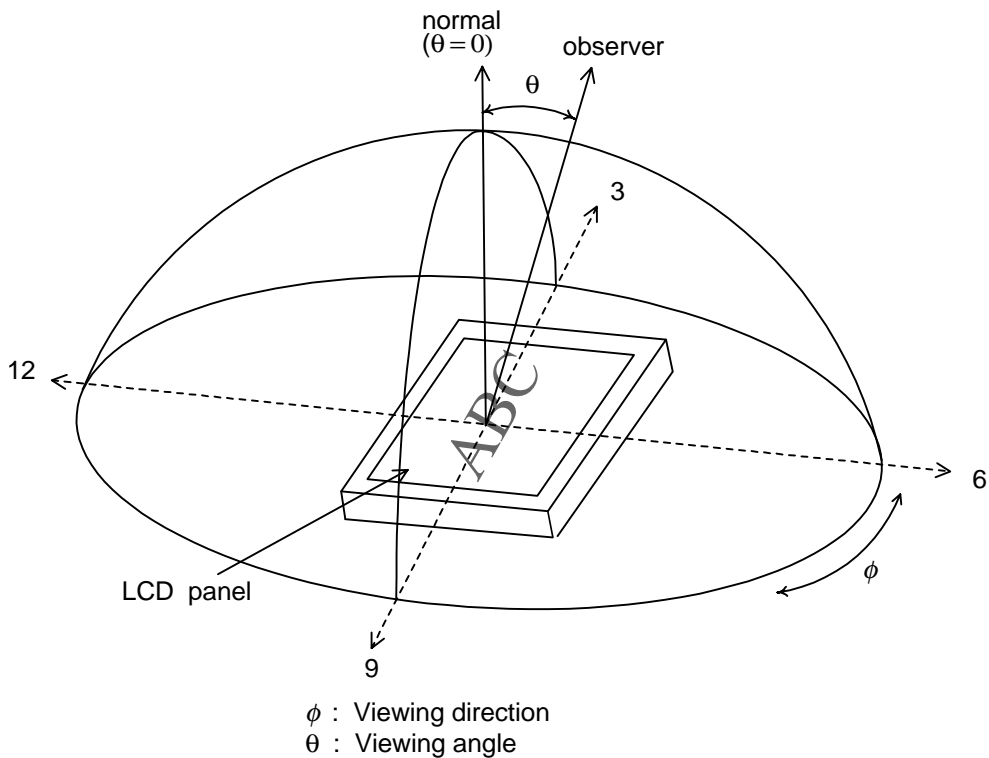

9. Reliability Test


No	Test Item	Test Condition
1	High Temperature Storage Test	Ta = +80 °C, 240 hrs
2	Low Temperature Storage Test	Ta = -30 °C, 240 hrs
3	High Temperature Operation Test	Ta = +60 °C, 240 hrs
4	Low Temperature Operation Test	Ta = -10 °C, 240 hrs
5	High Temperature & High Humidity Operation Test	Ta = +60 °C, 95%RH, 240 hrs
6	Thermal Cycling Test (non-operating)	-25°C → +25°C → +70°C, 200 Cycles 30 min 5min 30 min
7	Vibration Test (non-operating)	Frequency : 10 ~ 55 Hz Amplitude : 1.5 mm Sweep time: 11 mins Test period: 2 hrs for each direction of X, Y, Z
8	Shock Test (non-operating)	100G, 6ms Direction: ±X, ±Y, ±Z Cycle: 3 times/each direction
9	Electrostatic Discharge Test	150pF, 330Ω 10 times/point, 9 points/panel face

Ta: ambient temperature

[Judgement Criteria]



Under the display quality test conditions with normal operation state , there should be no change which may affect practical display function.

10. Block Diagram

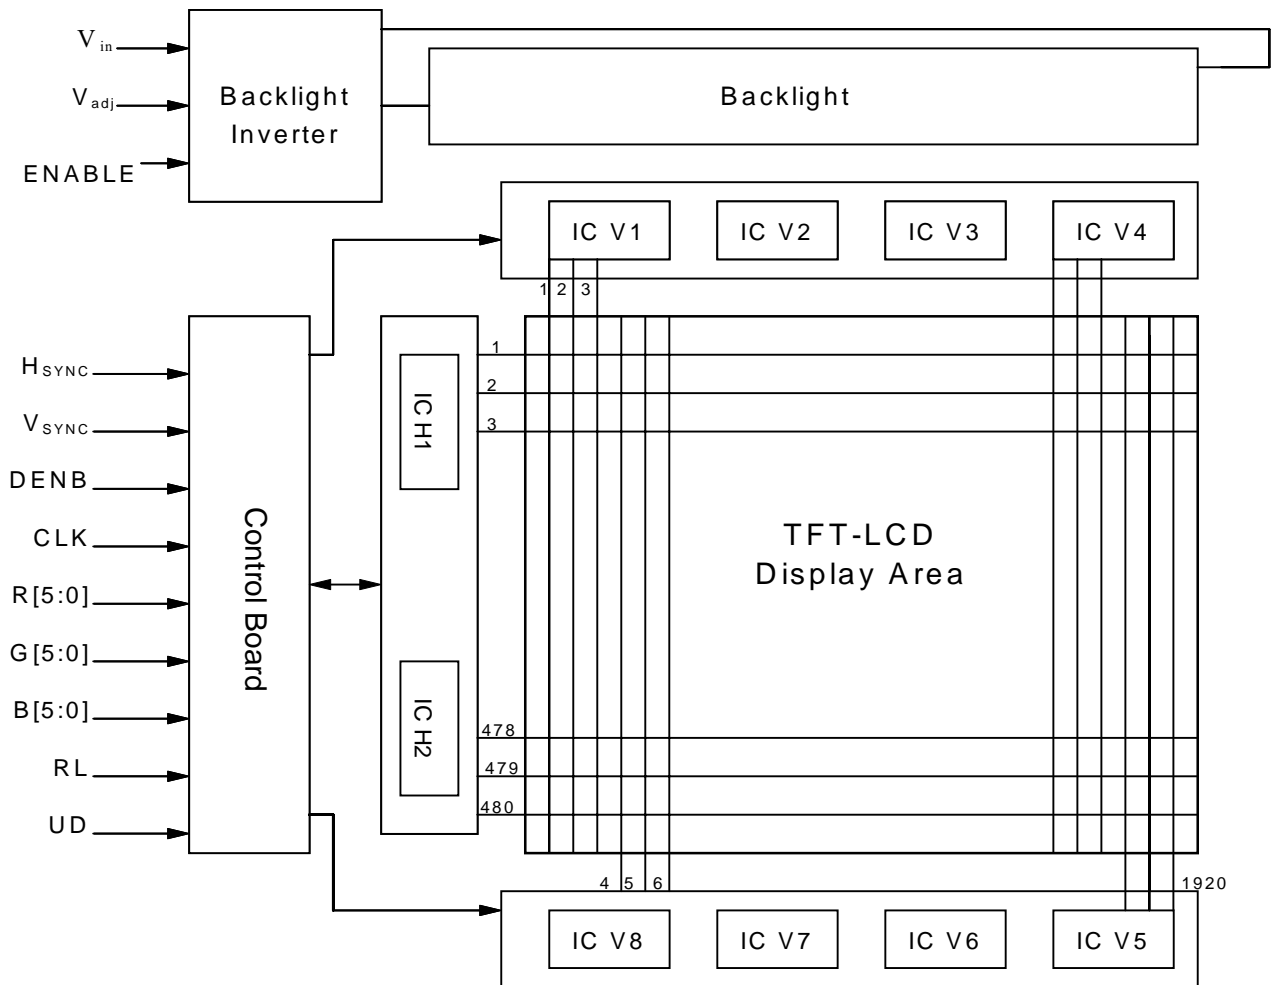

Revision History

Rev.	Issued Date	Revised Contents
1	Sep. 10,1998	NEW
2	Feb. 22, 1999	Page 4: Revise the Mechanical Drawing Page 15: Optical characters add White Chromaticity and Cross talk Page 16: Add Note 8-4, the definition of Cross Talk.
3	JUN.29.1999	Page 15:Add Control Board Dip Switch Format

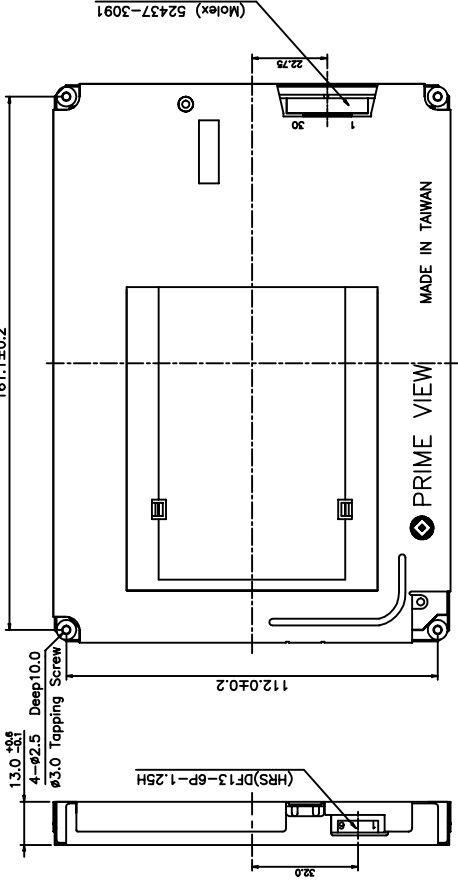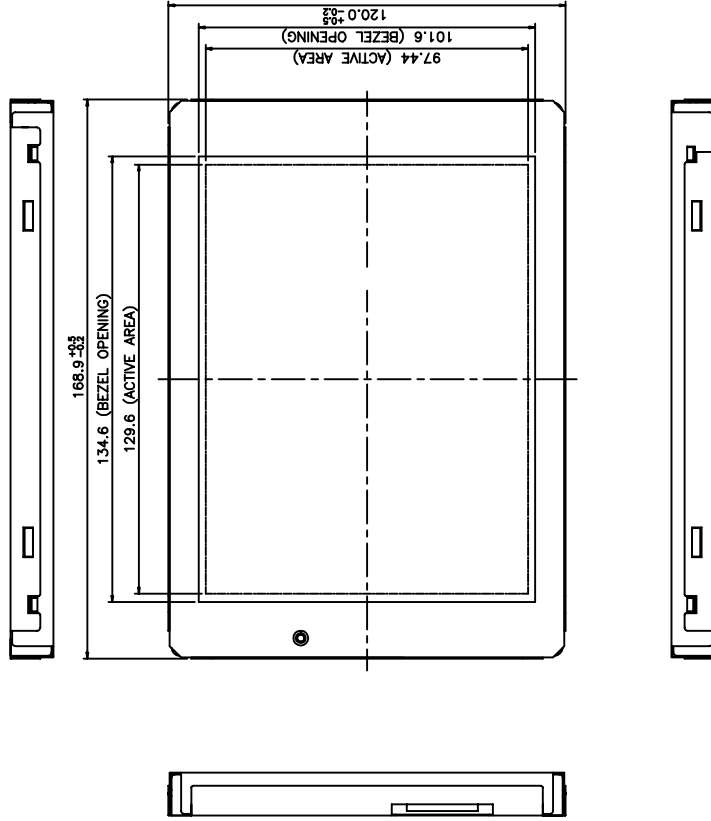

MTL.SPEC.	UNSPECIFIED TOL'S ±0.4	REMARK	DWC.TITLE	
	ANGLE ROUGHNESS		SHEET	OF
APPROVE		SCALE	UNIT	
CHECK		4/3	MM	
DESIGN	黃華男	MTL.NO.	P64CV1AP01 Model Dim.	
			DWG.NO.	REV. 01
				SIZE

元太科技工業股份有限公司
Prime View International Co.,Ltd.

REV. 01

SIZE