

## SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR

### 600 Watt Peak Pulse Power

#### FEATURES

- \* Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- \* For surface mounted applications in order to optimize board space
- \* Low profile package
- \* Built-in strain relief
- \* Glass passivated junction
- \* Low inductance
- \* Excellent clamping capability
- \* Repetition Rate (duty cycle):0.01%
- \* Fast response time: typically less than 1.0ps from 0 Volts to V(BR) for unidirectional types
- \* Typical IR less than 1mA above 10V
- \* High temperature soldering guaranteed:  
260°C/10 seconds,

#### MECHANICAL DATA

- Case:** JEDEC SMA-FL molded plastic  
**Terminals:** Plated leads, solderable per MIL-STD-202, Method 208  
**Mounting Position:** Any  
**Weight:**0.0327 gram

#### 1.DEVICES FOR BIPOLAR APPLICATIONS

For Bidirectional use C or CA Suffix for types P6SMAF62CA

Electrical characteristics apply in both directions.marking like Uni; without color band.


#### MAXIMUM RATINGS AND CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

RATING	SYMBOL	VALUE	UNITS
Peak Power Dissipation at $T_A=25^{\circ}\text{C}$ , $T_P=1\text{ms}$ (Note 1)	$P_{PPM}$	Minimum 600	Watts
Steady State Power Dissipation at $T_C=75^{\circ}\text{C}$ (Note 2)	$P_{M(AV)}$	5.0	Watts
Peak Forward Surge Current, 8.3ms Single Half Sine-Wave Superimposed on Rated Load(JECED Method) (Note 3)	$I_{FSM}$	100	Amps
Operating Temperature Range	$T_J$ ,	-55 to +150	°C
Storage Temperature Range	$T_{STG}$	-55 to +175	°C

**NOTES:**

1. Non-repetitive current pulse, per Fig. 3 and derated above  $T_A=25^{\circ}\text{C}$  per Fig. 2.
2. Mounted on Copper Leaf area of  $1.57\text{in}^2(40\text{mm}^2)$ .
3. 8.3ms single half sine-wave, duty cycle= 4 pulses per minutes maximum.

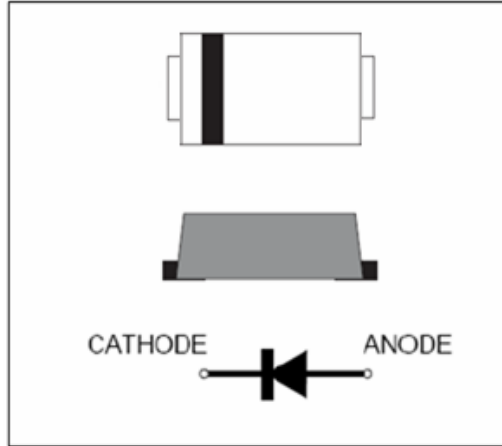

We declare that the material of product is Haloggen free (green epoxy compound)

Bi-DIRECTIONAL PART NUMBER	Device marking code	REVERSE STAND-OFF VOLTAGE VRWM (V)	BREAKDOWN VOLTAGE VBR (V) MIN. @IT	BREAKDOWN VOLTAGE VBR (V) MAX. @IT	TEST CURRENT IT (mA)	MAXIMUM CLAMPING VOLTAGE @IPP VC (V)	MAXIMUM PEA PULSE CURRENT IPPM (A)	REVERSE LEAKAGE @VRWM IR (uA)
P6SMAF6.8CA	6.8A	5.8	6.45	7.14	10	10.5	57.1	1000
P6SMAF7.5CA	7.5A	6.4	7.13	7.88	10	11.3	53.1	500
P6SMAF8.2CA	8.2A	7.02	7.79	8.61	10	12.1	49.6	200
P6SMAF9.1CA	9.1A	7.78	8.65	9.5	1	13.4	44.8	50
P6SMAF10CA	10A	8.55	9.5	10.5	1	14.5	41.4	10
P6SMAF11CA	11A	9.4	10.5	11.6	1	15.6	38.5	1
P6SMAF12CA	12A	10.2	11.4	12.6	1	16.7	35.9	1
P6SMAF13CA	13A	11.1	12.4	13.7	1	18.2	33.0	1
P6SMAF15CA	15A	12.8	14.3	15.8	1	21.2	28.3	1
P6SMAF16CA	16A	13.6	15.2	16.8	1	22.5	26.7	1
P6SMAF18CA	18A	15.3	17.1	18.9	1	25.2	23.8	1
P6SMAF20CA	20A	17.1	19	21	1	27.7	21.7	1
P6SMAF22CA	22A	18.8	20.9	23.1	1	30.6	19.6	1
P6SMAF24CA	24A	20.5	22.8	25.2	1	33.2	18.1	1
P6SMAF27CA	27A	23.1	25.7	28.4	1	37.5	16.0	1
P6SMAF30CA	30A	25.6	28.5	31.5	1	41.4	14.5	1
P6SMAF33CA	33A	28.2	31.4	34.7	1	45.7	13.1	1
P6SMAF36CA	36A	30.8	34.2	37.8	1	49.9	12.0	1
P6SMAF39CA	39A	33.3	37.1	41	1	53.9	11.1	1
P6SMAF43CA	43A	36.8	40.9	45.2	1	59.3	10.1	1
P6SMAF47CA	47A	40.2	44.7	49.4	1	64.8	9.3	1
P6SMAF51CA	51A	43.6	48.5	53.6	1	70.1	8.6	1
P6SMAF56CA	56A	47.8	53.2	58.8	1	77	7.8	1
P6SMAF62CA	62A	53	58.9	65.1	1	85	7.1	1
P6SMAF68CA	68A	58.1	64.6	71.4	1	92	6.5	1
P6SMAF75CA	75A	64.1	71.3	78.8	1	103	5.8	1
P6SMAF82CA	82A	70.1	77.9	86.1	1	113	5.3	1
P6SMAF91CA	91A	77.8	86.5	95.5	1	125	4.8	1
P6SMAF100CA	100A	85.5	95	105	1	137	4.4	1
P6SMAF110CA	110A	94	105	116	1	152	3.9	1
P6SMAF120CA	120A	102	114	126	1	165	3.6	1
P6SMAF130CA	130A	111	124	137	1	179	3.4	1
P6SMAF150CA	150A	128	143	158	1	207	2.9	1
P6SMAF160CA	160A	136	152	168	1	219	2.7	1
P6SMAF170CA	170A	145	162	179	1	234	2.6	1
P6SMAF180CA	180A	154	171	189	1	246	2.4	1
P6SMAF200CA	200A	171	190	210	1	274	2.2	1
P6SMAF220CA	220A	185	209	231	1	328	1.8	1
P6SMAF250CA	250A	214	237	263	1	344	1.7	1
P6SMAF300CA	300A	256	285	315	1	414	1.4	1

For parts without A , the VBR is + 10%

## 2. Ratings and Characteristic Curves ( TA = 25°C unless otherwise noted )

Fig. 1-Peak Pulse Power Rating Curve

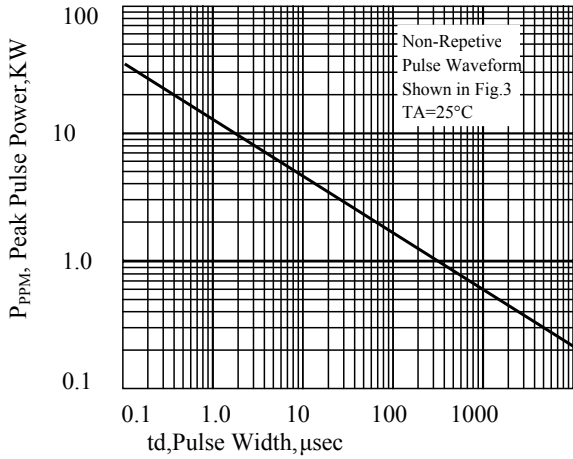


Fig. 2-Pulse Derating Curve

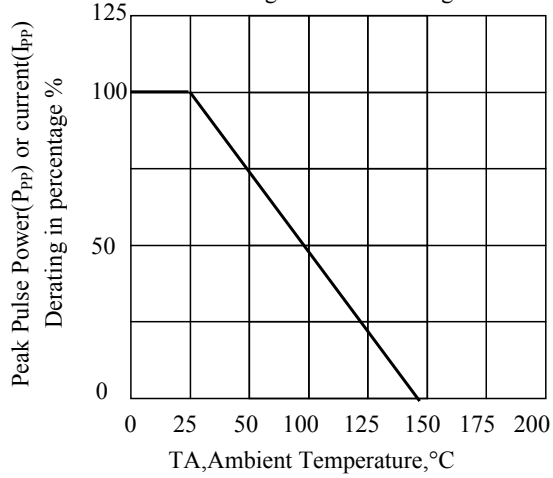


Fig. 3-Pulse Waveform

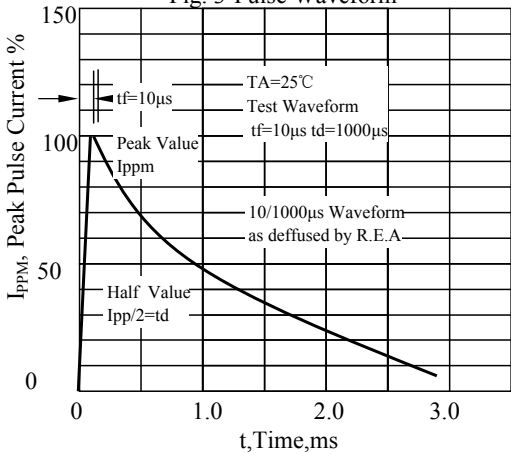


Fig. 4-Typical Junction Capacitance

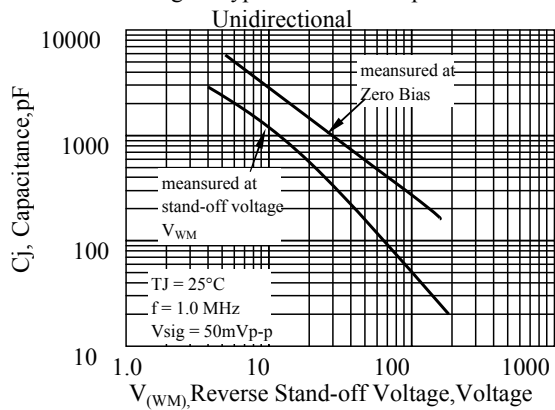


Fig 5. - typical transient thermal impedance



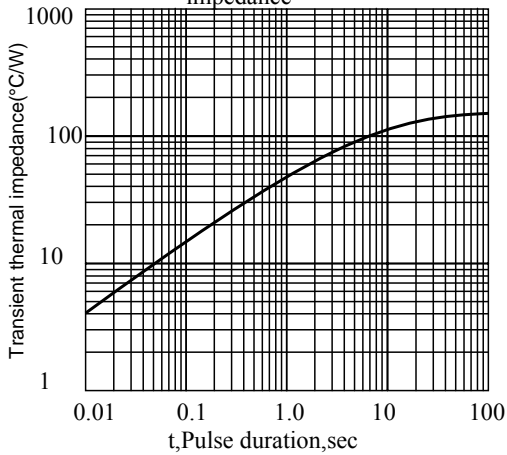


Fig. 6-Maximum Non-Repetitive Peak Forward Surge Current Unidirectional

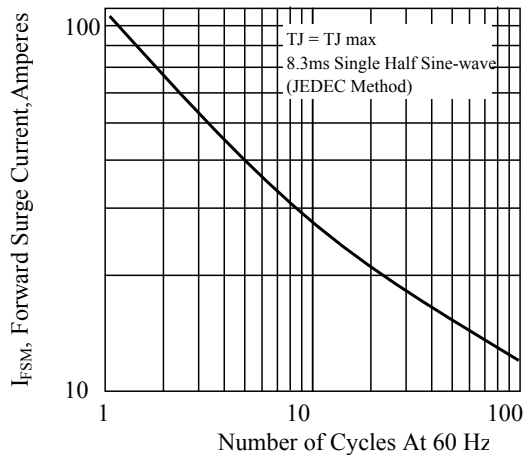

### 3. dimension:

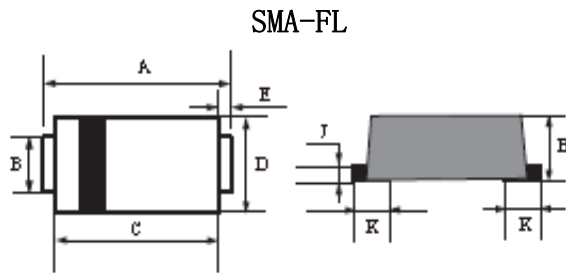

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.4	4.8	0.173	0.189
B	1.3	1.5	0.051	0.059
C	3.3	3.7	0.130	0.146
D	2.3	2.7	0.091	0.106
E	0.90Typ		0.035Typ	
H	0.9	1.2	0.036	0.047
J	0.11	0.21	0.005	0.009

Suggested solder pad layout

