

TRANSIENT VOLTAGE SUPPRESSORS

DESCRIPTION

The P6SMB series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

FEATURES

- For surface mounted applications in order to optimize board space.
- Low profile package.
- Built-in strain relief.
- Glass passivated junction.
- Excellent clamping capability. SMB/DO-214AA
- Repetition Rate (duty cycle):0.01%.
- Fast response time: typically less than 1.0ps from 0 Volts to V_{BR} for unidirectional types.
- Typical IR less than $1\mu A$ above 10V.
- High Temperature soldering: 260°C/10 seconds at terminals.
- Plastic package has Underwriters Laboratory Flammability 94V-O.



DO-214AA PACKAGE

MECHANICAL DATE

- Case: JEDEC DO214AA. Molded plastic over glass passivated junction.
- Terminal: Solder plated, solderable per MIL-STD-750, Method 2026.
- Polarity: Color band denoted positive end (cathode) except Bidirectional.
- Standard Packaging: 12mm tape (EIA STD RS-481).
- Weight: 0.003 ounce, 0.093 grams.

MAXIMUM RATINGS AND CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

RATING	SYMBOL	VALUE	UNITS
Peak Pulse Power Dissipation on 10/1000us waveform (Note1,Note2, Fig.1).	P_{PPM}	Minimum 600	Watts
Peak Pulse Current of on 10/1000us waveform.(Note1,Fig.3)	I_{PPM}	See Table	Amps
Steady State Power Dissipation at $T_L=75^\circ C$,Lead lengths.375",(9.5mm) (Note2,Fig.5).	$P_M(AV)$	5.0	Watts
Peak Forward Surge Current,8.3ms Single Half Sine-Wave Superimposed on Rated Load, (JEDEC Method) (Note 3,Fig.6).	I_{FSM}	100	Amps
Operating junction and Storage Temperature Range.	T_J, T_{STG}	-65 to +150	°C

Notes:

1. Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25^\circ C$ per Fig. 2.
2. Mounted on 5.0mm x 5.0mm (0.03mm thick) Copper Pads to each terminal.
3. 8.3ms single half sine-wave, or equivalent square wave, Duty cycle=4 pulses per minutes maximum.

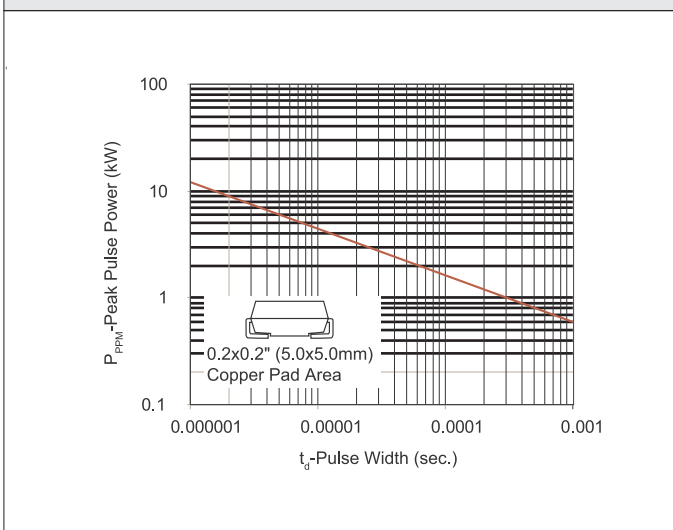
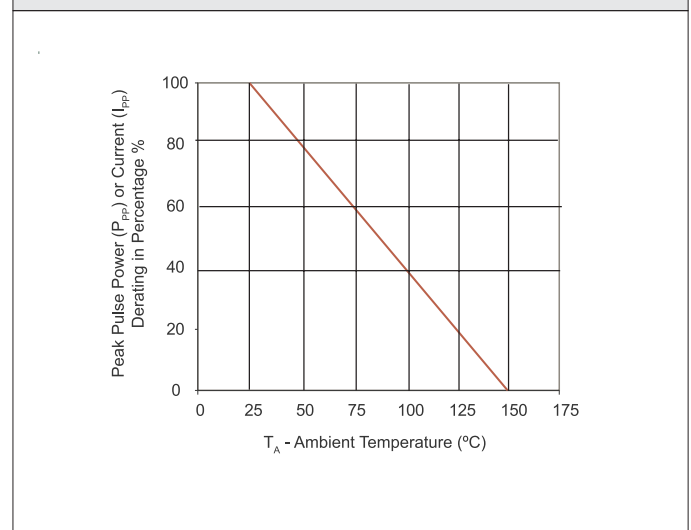
TRANSIENT VOLTAGE SUPPRESSORS
ELECTRICAL CHARACTERISTICS

Part Number		Device Marking Code		Reverse Stand-Off Voltage	Breakdown Voltage @I _T	Breakdown Voltage @I _T	Test Current	Maximum Clamping Voltage @I _{PP}	Peak Pulse Current	Reverse Leakage @V _{RWM}
UNI-POLAR	BI-POLAR	UNI	BI	V _{RWM} (V)	V _{BR} MIN.(V)	V _{BR} MAX.(V)	I _T (mA)	V _c (V)	I _{PP} (A)	I _R (uA)
P6SMB6.8A	P6SMB6.8CA	6V8A	6V8C	5.8	6.45	7.14	10	10.5	57	1000
P6SMB7.5A	P6SMB7.5CA	7V5A	7V5C	6.4	7.13	7.88	10	11.3	53	500
P6SMB8.2A	P6SMB8.2CA	8V2A	8V2C	7.02	7.79	8.61	10	12.1	50	200
P6SMB9.1A	P6SMB9.1CA	9V1A	9V1C	7.78	8.65	9.5	1	13.4	45	50
P6SMB10A	P6SMB10CA	10A	10C	8.55	9.5	10.5	1	14.5	41	10
P6SMB11A	P6SMB11CA	11A	11C	9.4	10.5	11.6	1	15.6	38	5
P6SMB12A	P6SMB12CA	12A	12C	10.2	11.4	12.6	1	16.7	36	5
P6SMB13A	P6SMB13CA	13A	13C	11.1	12.4	13.7	1	18.2	33	1
P6SMB15A	P6SMB15CA	15A	15C	12.8	14.3	15.8	1	21.2	28	1
P6SMB16A	P6SMB16CA	16A	16C	13.6	15.2	16.8	1	22.5	27	1
P6SMB18A	P6SMB18CA	18A	18C	15.3	17.1	18.9	1	25.2	24	1
P6SMB20A	P6SMB20CA	20A	20C	17.1	19	21	1	27.7	22	1
P6SMB22A	P6SMB22CA	22A	22C	18.8	20.9	23.1	1	30.6	20	1
P6SMB24A	P6SMB24CA	24A	24C	20.5	22.8	25.2	1	33.2	18	1
P6SMB27A	P6SMB27CA	27A	27C	23.1	25.7	28.4	1	37.5	16	1
P6SMB30A	P6SMB30CA	30A	30C	25.6	28.5	31.5	1	41.4	14.4	1
P6SMB33A	P6SMB33CA	33A	33C	28.2	31.4	34.7	1	45.7	13.2	1
P6SMB36A	P6SMB36CA	36A	36C	30.8	34.2	37.8	1	49.9	12	1
P6SMB39A	P6SMB39CA	39A	39C	33.3	37.1	41	1	53.9	11.2	1
P6SMB43A	P6SMB43CA	43A	43C	36.8	40.9	45.2	1	59.3	10.1	1
P6SMB47A	P6SMB47CA	47A	47C	40.2	44.7	49.4	1	64.8	9.3	1
P6SMB51A	P6SMB51CA	51A	51C	43.6	48.5	53.6	1	70.1	8.6	1
P6SMB56A	P6SMB56CA	56A	56C	47.8	53.2	58.8	1	77	7.8	1
P6SMB62A	P6SMB62CA	62A	62C	53	58.9	65.1	1	85	7.1	1
P6SMB68A	P6SMB68CA	68A	68C	58.1	64.6	71.4	1	92	6.5	1
P6SMB75A	P6SMB75CA	75A	75C	64.1	71.3	78.8	1	103	5.8	1
P6SMB82A	P6SMB82CA	82A	82C	70.1	77.9	86.1	1	113	5.3	1
P6SMB91A	P6SMB91CA	91A	91C	77.8	86.5	95.5	1	125	4.8	1
P6SMB100A	P6SMB100CA	100A	100C	85.5	95	105	1	137	4.4	1
P6SMB110A	P6SMB110CA	110A	110C	94	105	116	1	152	4	1
P6SMB120A	P6SMB120CA	120A	120C	102	114	126	1	165	3.6	1
P6SMB130A	P6SMB130CA	130A	130C	111	124	137	1	179	3.3	1
P6SMB150A	P6SMB150CA	150A	150C	128	143	158	1	207	2.9	1
P6SMB160A	P6SMB160CA	160A	160C	136	152	168	1	219	2.7	1
P6SMB170A	P6SMB170CA	170A	170C	145	162	179	1	234	2.6	1
P6SMB180A	P6SMB180CA	180A	180C	154	171	189	1	246	2.4	1
P6SMB200A	P6SMB200CA	200A	200C	171	190	210	1	274	2.2	1

TRANSIENT VOLTAGE SUPPRESSORS
ELECTRICAL CHARACTERISTICS

Part Number		Device Marking Code		Reverse Stand-Off Voltage	Breakdown Voltage @I _T	Breakdown Voltage @I _T	Test Current	Maximum Clamping Voltage @I _{PP}	Peak Pulse Current	Reverse Leakage @V _{RWM}
UNI-POLAR	BI-POLAR	UNI	BI	V _{RWM} (V)	V _{BR} MIN.(V)	V _{BR} MAX.(V)	I _T (mA)	V _C (V)	I _{PP} (A)	I _R (uA)
P6SMB220A	P6SMB220CA	220A	220C	185	209	231	1	328	1.9	1
P6SMB250A	P6SMB250CA	250A	250C	214	237	263	1	344	1.8	1
P6SMB300A	P6SMB300CA	300A	300C	256	285	315	1	414	1.5	1
P6SMB350A	P6SMB350CA	350A	350C	300	332	368	1	482	1.3	1
P6SMB400A	P6SMB400CA	400A	400C	342	380	420	1	548	1.1	1
P6SMB440A	P6SMB440CA	440A	440C	376	418	462	1	600	1.04	1
P6SMB480A	P6SMB480CA	480A	480C	408	456	504	1	658	0.91	1
P6SMB550A	P6SMB550CA	550A	550C	467.5	523	578	1	754	0.8	1

Notes:For bidirectional type having V_{RWM} of 10 volts and less,the I_R limit is double.

RATINGS AND CHARACTERISTIC CURVES (T_A=25°C unless otherwise noted)
Figure 1 - Peak Pulse Power Rating Curve

Figure 2 - Pulse Derating Curve


TRANSIENT VOLTAGE SUPPRESSORS

Figure 3 - Pulse Waveform

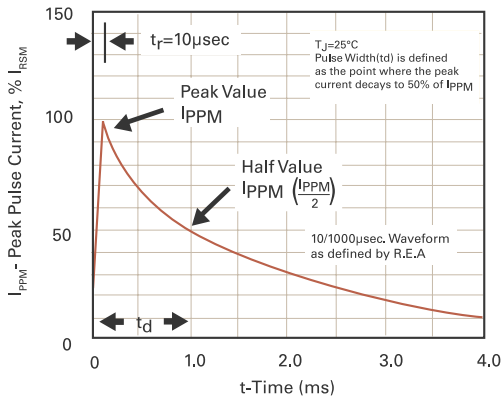


Figure 4 - Typical Junction Capacitance

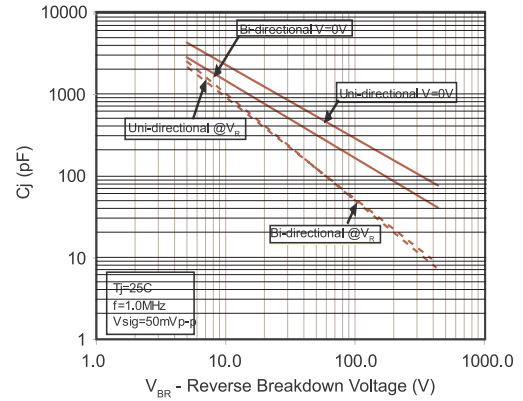


Figure 5 - Steady State Power Dissipation Derating Curve

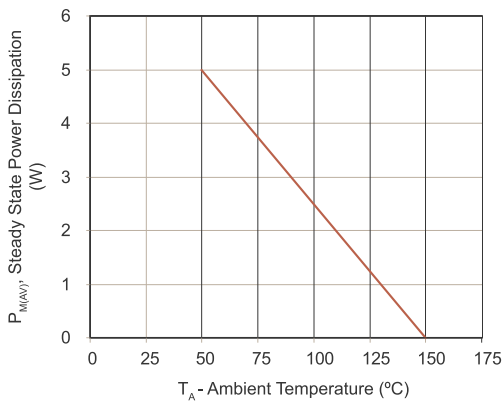
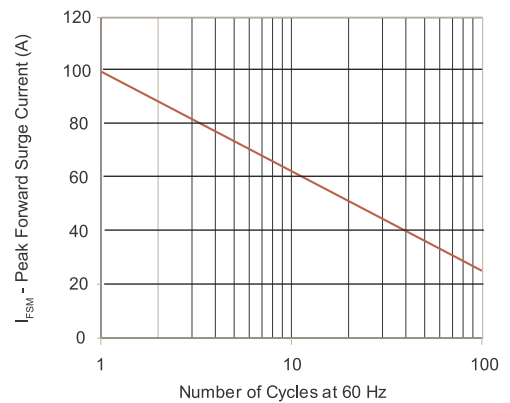


Figure 6 - Maximum Non-Repetitive Forward Surge Current Uni-Directional Only



PART NUMBERING SYSTEM

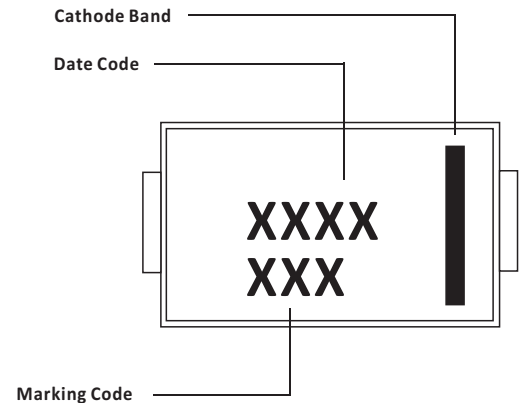
P6SMB 6.8 CA

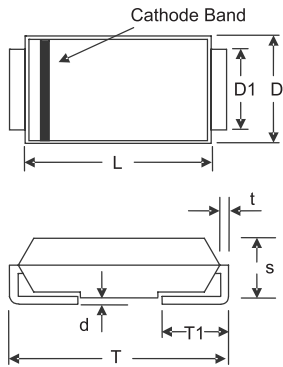
Suffix
 A = 5 % Tolerance Unidirectional Device
 CA = 5 % Tolerance Bidirectional Device

Working Peak Reverse Voltage
 5.0 = 5.0 VRWM (Volts)

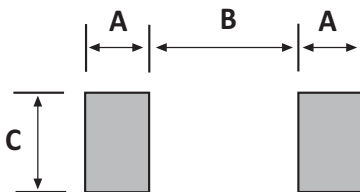
Package
 SMBJ = SMB/DO-214AA

PART MARKING SYSTEM



TRANSIENT VOLTAGE SUPPRESSORS
DIMENSIONS

SMB/DO-214AA

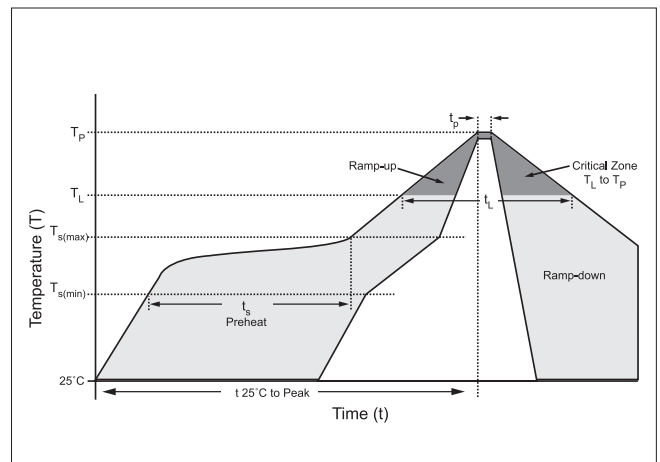
Item	Millimeters		Inches	
	Min.	Max.	Min.	Max.
L	4.06	4.57	0.160	0.180
D	3.30	3.94	0.130	0.155
D1	1.95	2.20	0.077	0.086
T	5.21	5.59	0.205	0.220
T1	0.76	1.52	0.030	0.060
d	-	0.20	-	0.008
s	2.13	2.47	0.084	0.097
t	0.152	0.31	0.006	0.012

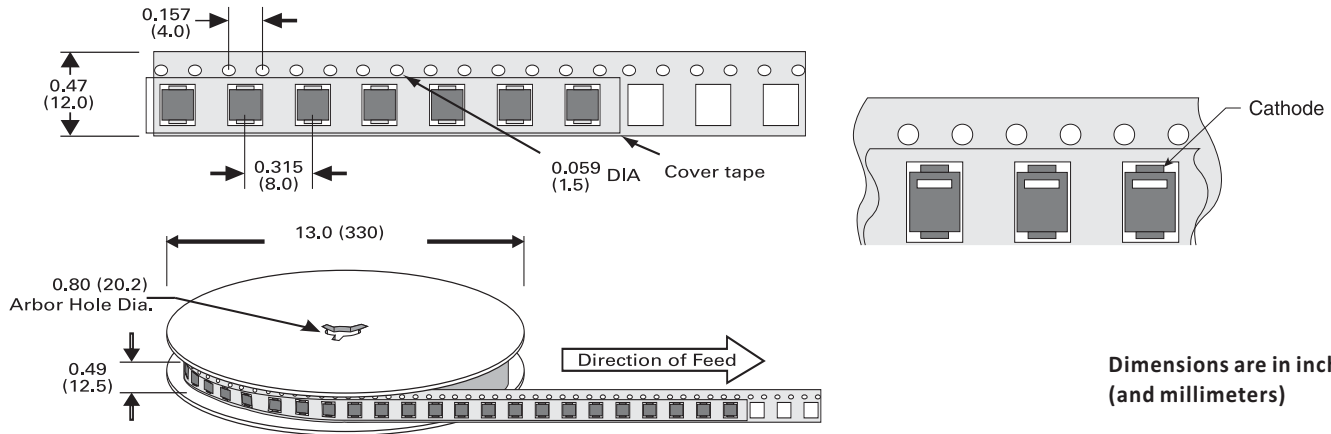


Item	Millimeters		Inchs	
	Min.	Max.	Min.	Max.
A	0.085	-	2.160	-
B	-	0.107	-	2.740
C	0.085	-	2.160	-

SOLDERING PARAMETERS

Reflow Condition		Lead-free assembly
Pre Heat	Temperature Min ($T_{S(min)}$)	150°C
	Temperature Max ($T_{S(max)}$)	200°C
	Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak)		3°C/second max
$T_{S(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	Temperature (T_L) (Liquidus)	217°C
	Time (min to max) (t_s)	60 – 150 seconds
Peak Temperature (T_P)		260 ^{+0/-5} °C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_P)		8 minutes Max.
Do not exceed		280°C



TRANSIENT VOLTAGE SUPPRESSORS
TAPE AND REEL SPECIFICATION


Dimensions are in inches
(and millimeters)

ORDERING INFORMATION

PART NUMBER	COMPONENT PACKAGE	QTY/REEL	REEL SIZE
P6SMBxxxA/CA-T13	DO-214AC	2500	13"
P6SMBxxxA/CA-T7	DO-214AC	500	7"

CONTACT US
Headquarters

A Building Caohejing I&E Park Pujiang Minhang Shanghai
China

Web

<http://www.semiwill.com>

By Telephone

General: 86-21-34637654
Sales: 86-21-34637458
Customer Service: 86-21-34637172

By Email

Sales: sales@semiwill.com
Customer Service: cs@semiwill.com
Technical Support: fae@semiwill.com

By Fax

General: 86-21-34637173
Sales: 86-21-39650654

COPYRIGHT ©SEMIWILL 2009 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: SEMIWILL reserves the right to change the electrical and/or mechanical characteristics described herein without notice.

DESIGN CHANGES: SEMIWILL reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. SEMIWILL assumes no responsibility with respect to the selection or specifications of such products. SEMIWILL makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SEMIWILL assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: SEMIWILL products are not authorized for use in life support systems without written consent from the factory.