


P8315BD


N-Channel Enhancement Mode MOSFET

PRODUCT SUMMARY

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
150V	83mΩ @ $V_{GS} = 10V$	20A

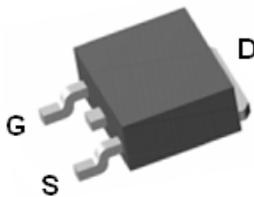

TO-252



ABSOLUTE MAXIMUM RATINGS ($T_A = 25\text{ °C}$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNITS
Drain-Source Voltage		V_{DS}	150	V
Gate-Source Voltage		V_{GS}	±30	V
Continuous Drain Current	$T_C = 25\text{ °C}$	I_D	20	A
	$T_C = 100\text{ °C}$		12	
Pulsed Drain Current ¹		I_{DM}	50	
Avalanche Current		I_{AS}	20	
Avalanche Energy	$L = 1\text{mH}$	E_{AS}	207	mJ
Power Dissipation	$T_C = 25\text{ °C}$	P_D	73	W
	$T_C = 100\text{ °C}$		29	
Junction & Storage Temperature Range		T_j, T_{stg}	-55 to 150	°C

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Ambient	$R_{\theta JA}$		50	°C / W
Junction-to-Case	$R_{\theta JC}$		1.7	

¹Pulse width limited by maximum junction temperature.

P8315BD

N-Channel Enhancement Mode MOSFET

ELECTRICAL CHARACTERISTICS (T_J = 25 °C, Unless Otherwise Noted)


PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNITS
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = 250μA	150			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	1	2	3	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0V, V _{GS} = ±30V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 120V, V _{GS} = 0V			1	μA
		V _{DS} = 100V, V _{GS} = 0V, T _J = 125 °C			10	
Drain-Source On-State Resistance ¹	R _{DS(ON)}	V _{GS} = 4.5V, I _D = 10A		78	100	mΩ
		V _{GS} = 10V, I _D = 10A		68	83	
Forward Transconductance ¹	g _{fs}	V _{DS} = 5V, I _D = 10A		20		S
DYNAMIC						
Input Capacitance	C _{iss}	V _{GS} = 0V, V _{DS} = 25V, f = 1MHz		1133		pF
Output Capacitance	C _{oss}			208		
Reverse Transfer Capacitance	C _{rss}			58		
Gate Resistance	R _g	V _{GS} = 0V, V _{DS} = 0V, f = 1MHz		1.8		Ω
Total Gate Charge ²	Q _g	V _{GS} = 10V, V _{DS} = 75V, I _D = 10A		41		nC
Gate-Source Charge ²	Q _{gs}			4.1		
Gate-Drain Charge ²	Q _{gd}			19		
Turn-On Delay Time ²	t _{d(on)}	V _{DS} = 75V, I _D ≅ 10A, V _{GS} = 10V, R _{GEN} = 6Ω		14		nS
Rise Time ²	t _r			49		
Turn-Off Delay Time ²	t _{d(off)}			47		
Fall Time ²	t _f			39		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (T_J = 25 °C)						
Continuous Current	I _S				16	A
Forward Voltage ¹	V _{SD}	I _F = 10A, V _{GS} = 0V			1.6	V
Reverse Recovery Time	t _{rr}	I _F = 10A, di _F /dt = 100A / μS		101		nS
Reverse Recovery Charge	Q _{rr}				394	

¹Pulse test : Pulse Width ≤ 300 μsec, Duty Cycle ≤ 2%.

²Independent of operating temperature.

P8315BD


N-Channel Enhancement Mode MOSFET

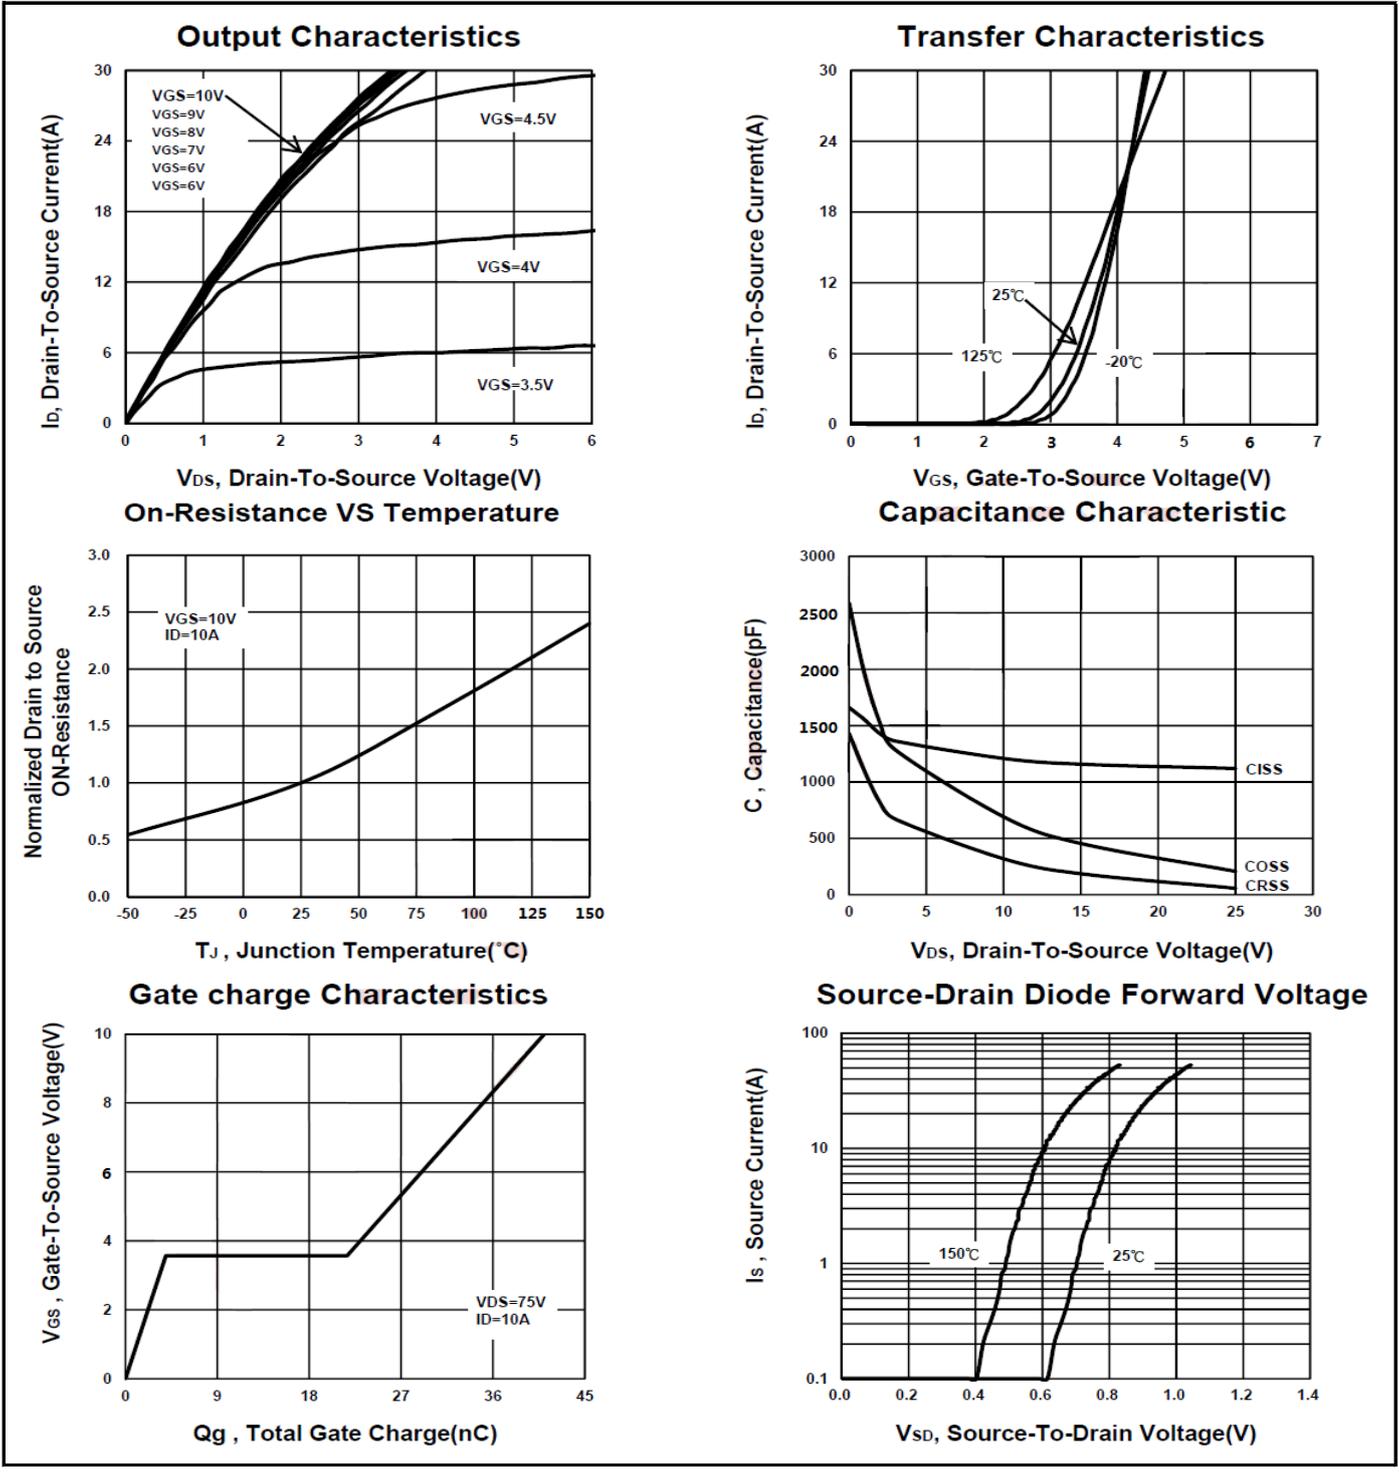


P8315BD

N-Channel Enhancement Mode MOSFET


Safe Operating Area

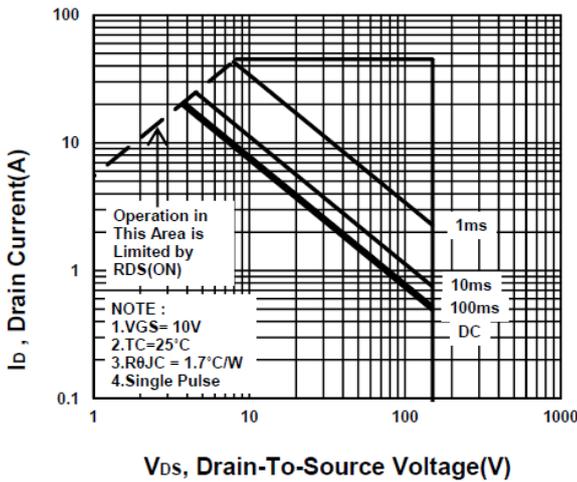

Single Pulse Maximum Power Dissipation

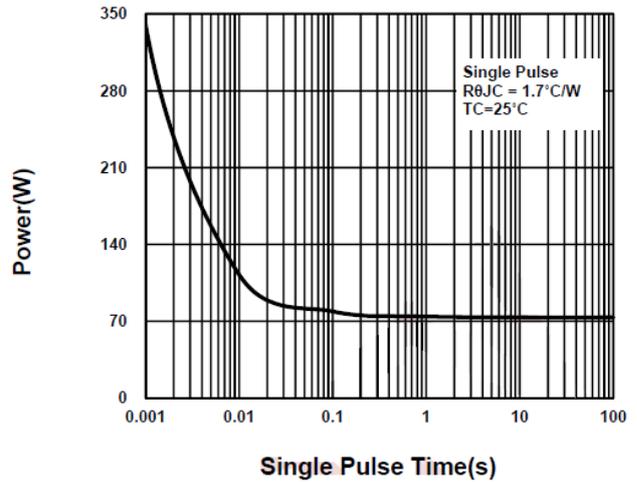

Transient Thermal Response Curve

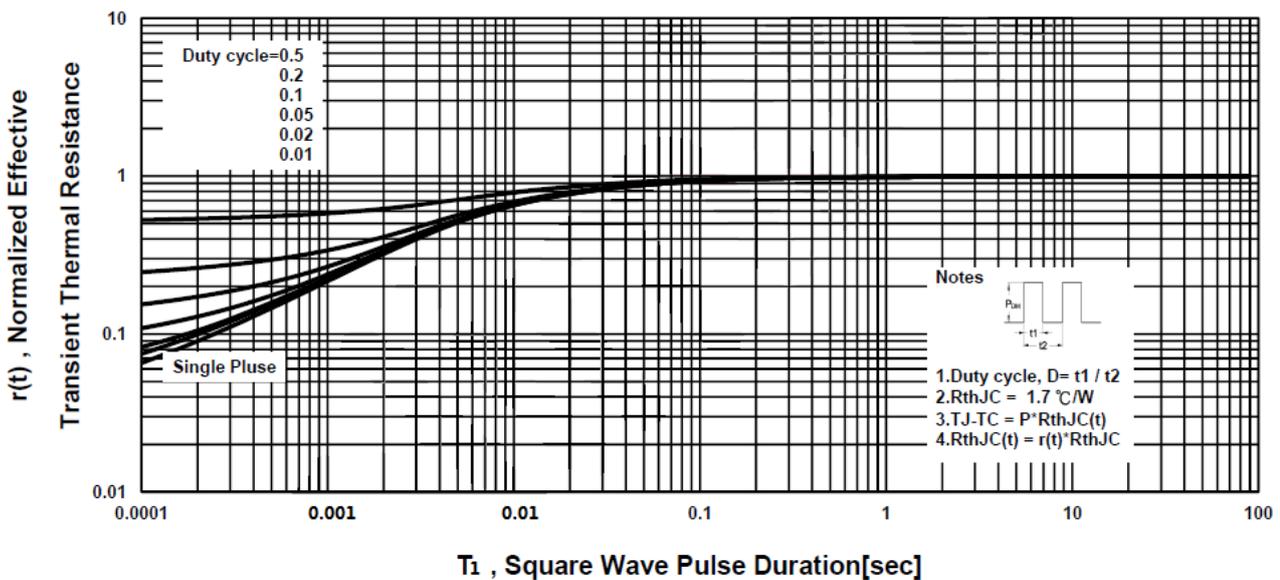


P8315BD

N-Channel Enhancement Mode MOSFET

Package Dimension

TO-252 (DPAK) MECHANICAL DATA

Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	8.9	10	10.41	J	4.8		5.64
B	2.1	2.2	2.4	K	0.15		1.1
C	0.4	0.5	0.61	L	0.4	0.76	0.89
D	0.82	1.2	1.5	M	4.2	4.58	5
E	0.4	0.5	0.61	S	4.9	5.1	5.3
F	0		0.2	T	4.6	4.75	5.44
G	5.3	6.1	6.3	U	1.4		1.78
H	0.9		1.7	V	0.55	1.25	1.7
I	6.3	6.5	6.8				

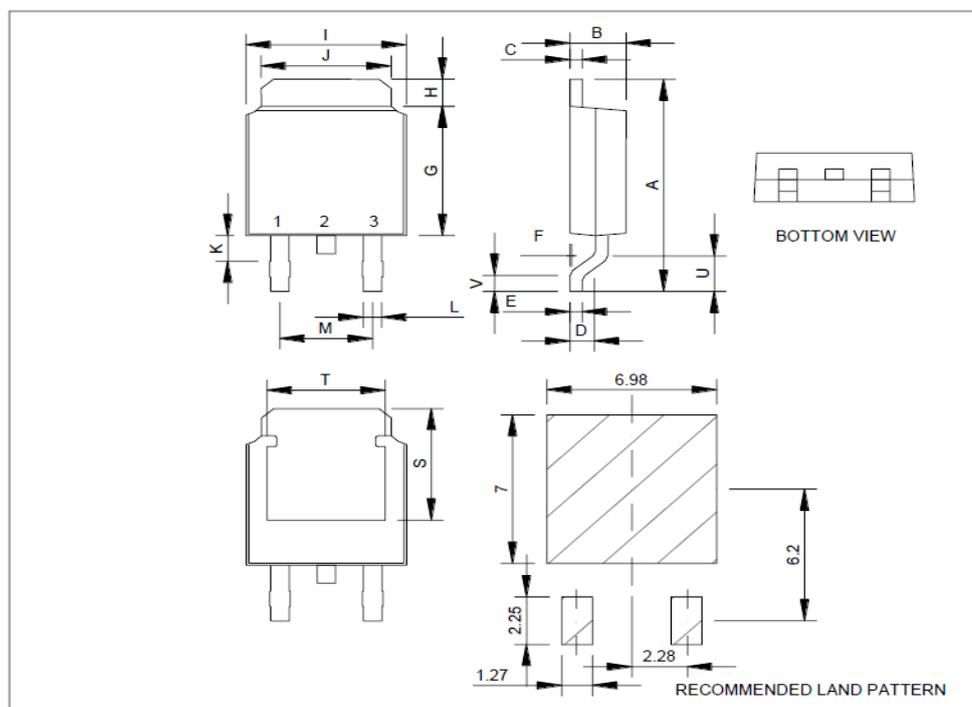

*因为各家封装模具不同而外观略有所差异，不影响电性及Layout。