



PA2308

LINEAR INTEGRATED CIRCUIT

CLASS AB STEREO HEADPHONE DRIVER


DESCRIPTION

As operating on a single 5V supply, the UTC **PA2308** is capable of delivering 280mW of max. Output power to an 8Ωload or 110mW to a 32Ωload with less than 10% (THD+N).

The device is very suitable for portable digital audio application.

FEATURES

- * Output power less than 10% THD+N, $V_{DD}=5V(TYP)$
 - 280mW/CH (typical) into a 8Ω load
 - 110mW/CH (typical) into a 32Ω load
- *Very High signal-to-noise ratio
- *Large output voltage swing
- *Good power supply ripple rejection
- *Low power consumption and Low distortion
- *Fix wide temperature range
- *Without switch ON/OFF clicks

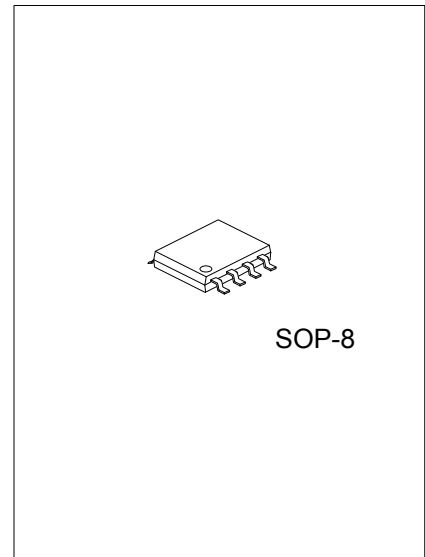


ORDERING INFORMATION


| Ordering Number | Package | Packing |
|-----------------|---------|-----------|
| PA2308G-S08-R | SOP-8 | Tape Reel |

| | |
|--|---|
| <p>PA2308G-S08-R</p> <ul style="list-style-type: none"> (1) Packing Type (2) Package Type (3) Green Package | <ul style="list-style-type: none"> (1) R: Tape Reel (2) S08: SOP-8 (3) G: Halogen Free and Lead Free |
|--|---|

MARKING




■ PIN CONFIGURATION

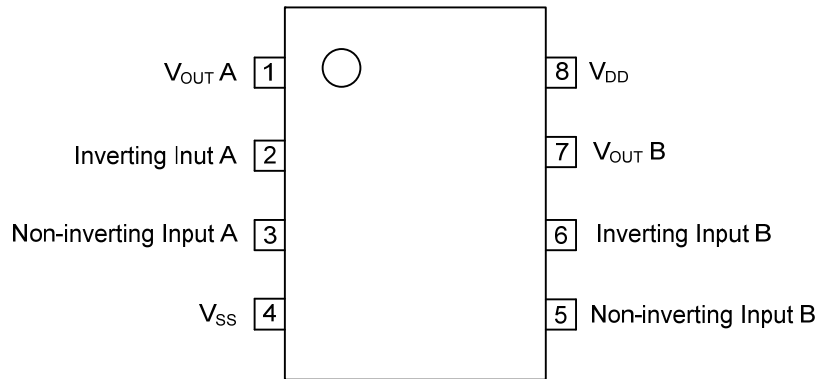

■ PIN DESCRIPTION

| PIN NO. | PIN NAME | I/O | PIN DESCRIPTION |
|---------|------------------------|-----|-----------------------------------|
| 1 | V _{OUT A} | O | Channel A output pin |
| 2 | Inverting Input A | I | Inverting input for channel A |
| 3 | Non- Inverting Input A | I | Non-inverting input for channel A |
| 4 | V _{SS} | | Ground |
| 5 | Non- Inverting Input B | I | Non-inverting input for channel B |
| 6 | Inverting Input B | I | Inverting input for channel B |
| 7 | V _{OUT B} | O | Channel B output pin |
| 8 | V _{DD} | I | Supply voltage input pin |

■ BLOCK DIAGRAM

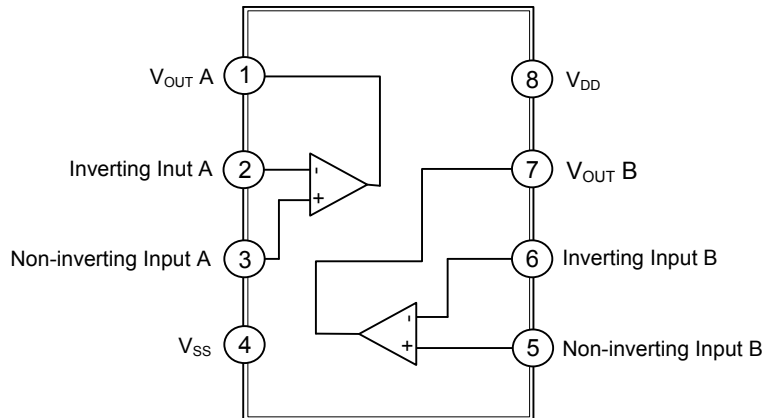

■ ABSOLUTE MAXIMUM RATINGS (T_A=25°C)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------|------------------|-------------|------|
| Supply Voltage | V _{DD} | 7 | V |
| Junction Temperature | T _J | 150 | °C |
| Operating Temperature | T _{OPR} | -40 to 85 | °C |
| Storage Temperature | T _{STG} | -65 to +150 | °C |

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

| PARAMETER | SYMBOL | MIN | TYP | MAX | UNIT |
|---------------------|-----------------|-----|-----|-----|------|
| Junction to Ambient | θ _{JA} | | 210 | | K/W |

■ ELECTRICAL CHARACTERISTICS(T_A=25°C; unless otherwise specified)


V_{DD}=5V, V_{SS}=0V, f=1kHz, R_L=32Ω

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNIT |
|--|----------------------|---|------|------|------|------|
| SUPPLY | | | | | | |
| Supply Voltage | Single | V _{DD} | 3.0 | 5.0 | 6.0 | V |
| | Dual | | ±1.5 | ±2.5 | ±3.0 | |
| Negative Supply Voltage | V _{SS} | | -1.5 | -2.5 | -3.0 | V |
| Supply Current | I _{DD} | No Load | | 2.5 | 5 | mA |
| Total Power Dissipation | P _D | No Load | | 12.5 | 25 | mW |
| DC CHARACTERISTICS | | | | | | |
| Input Offset Voltage | V _{IN(OFF)} | | | 5 | | mV |
| Input Bias Current | I _{BIAS} | | | 10 | | pA |
| Common Mode Voltage | V _{CM} | | 0 | | 3.5 | V |
| Closed Loop Voltage Gain | G _V | R _L =5kΩ | | 75 | | dB |
| Max. Output Current | I _{OUT} | (THD+N)/S<0.1% | | 140 | | mA |
| Output Resistance | R _O | | | 0.25 | | Ω |
| AC CHARACTERISTICS | | | | | | |
| Output Voltage Swing | V _{OUT} | R _L =32Ω(Note 1) | 0.25 | | 4.75 | V |
| | | R _L =16Ω(Note 1) | 0.5 | | 4.5 | |
| Power Supply Rejection Ratio | PSRR | f _{IN} =100Hz, V _{RIPPLE(P.P)} =100mV | | 65 | | dB |
| Channel Separation | α _{CS} | R _L =32Ω | | 95 | | dB |
| Load Capacitance | C _L | | | | 200 | pF |
| Total Harmonic Distortion Plus Noise to Signal Ratio | (THD+N)/S | R _L =32Ω(Note 2) | | -65 | -60 | dB |
| | | | | 0.05 | 0.1 | % |
| Signal to Noise Ratio | S/N | | 90 | 100 | | dB |
| Unity Gain Frequency | FG | R _L =5kΩ | | 5 | | MHz |
| Max. Output Power | P _{OUT} | (THD+N)/S<0.1% | | 84 | | mW |
| Input Capacitance | C _I | | | 3 | | PF |
| Power Bandwidth | B | Unity Gain Inverting | | 20 | | kHz |




Notes: 1. Values are proportional to V_{DD}; (THD+N)/S<0.1%

2. V_{DD}=5V; V_{OUT(P-P)}=3.5V(at 0dB)

■ TYPICAL APPLICATION

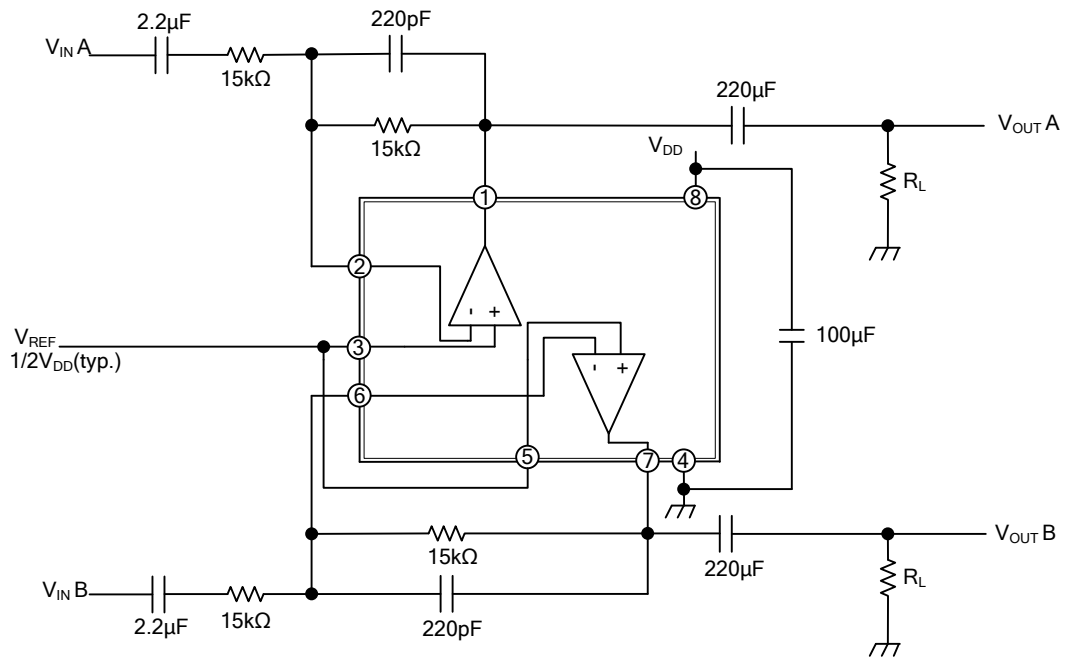

■ TYPICAL CHARACTERISTICS

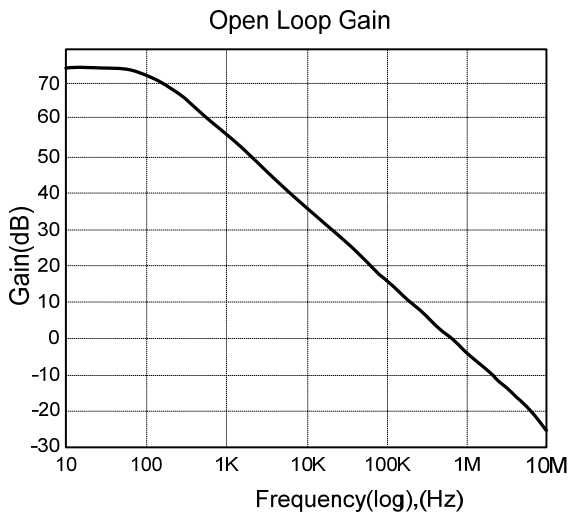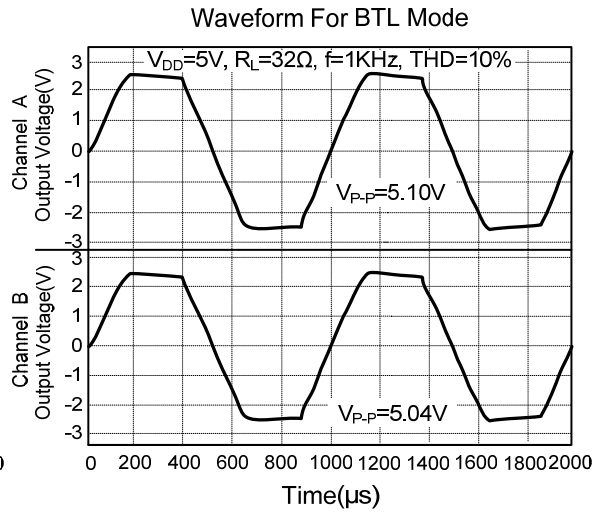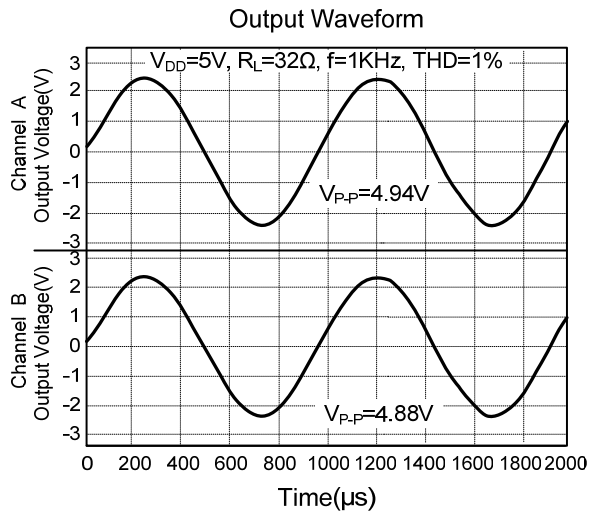

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.