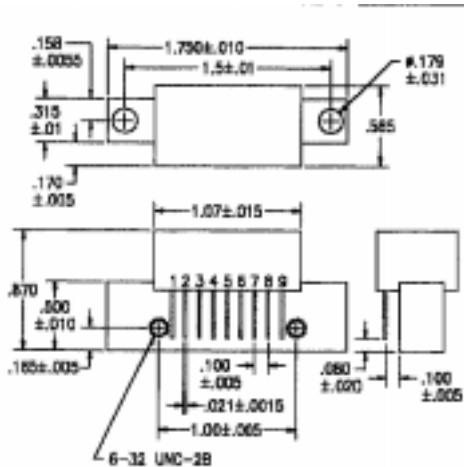


PAW788**40-750 MHz.****34 dB.****CATV Ultra-linear Amplifier****Features: (typical values)**

Ultra High Linearity
 Low Noise Figure
 Rugged Construction
 Operation over a wide voltage range
 Usable for 50 ohm operation
 Unconditional Stability

PHOENIX
 MICROWAVE CORP.
**Specifications @Tcase = 30°C (Referenced to 75 ohms)**

Parameter	Typical Conditions	Min. Value	Max. Value	Units
Frequency Range		40	750	MHz.
Power Gain	f=50 MHz.	33.5	35.5	dB.
Cable Equivalent slope	f=40 MHz. to 750 MHz.	0	3.0	dB.
Gain Flatness (peak to valley)	f=40 to 750 MHz.		+/- 1.2	dB.
Input/Output Return Loss	f=40 to 320 MHz.	16		dB.
Input/Output Return Loss	f=320 to 750 MHz.	13		dB.
Composite Triple Beat (CTB)	110 channels flat Vo=40dBmV. measured @ channel 78		-60	dB.
Cross Modulation (XMOD)	110 channels flat Vo=40dBmV. measured @ channel 2		-62	dB.
Composite 2nd. Order (CSO)	110 channels flat Vo=40dBmV. measured @ channel 78		-58	dB.
IP3 / IP2	2 tone	34/56		dBm.
Noise Figure (NF)	@ f= 750 MHz.		8.0	dB.
Total Current (I _{TOT})	@ Voltage of +24v.		340	dB.

Outline Drawings**Maximum Ratings**

Storage Temperature -40°C to +100°C
 DC Voltage +28 volts
 RF Input voltage 40dBmV.
 Operating Base Temperature +100°C

Pin Configuration

Pin #	Description
1	Input
2,3,7,8	Ground
5	+V
4,6	not used
9	Output