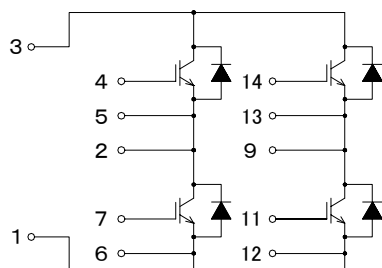
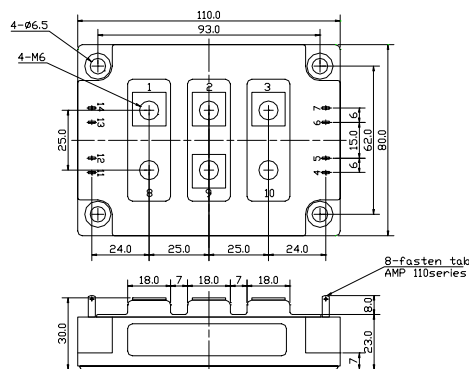


CIRCUIT

OUTLINE DRAWING


8-fasten- tab No 110

Dimension(mm)

Approximate Weight : 650g

MAXMUM RATINGS ($T_c=25^\circ\text{C}$)

Item		Symbol	PBMB100B12	Unit
Collector-Emitter Voltage		V_{CES}	1200	V
Gate - Emitter Voltage		V_{GES}	+/- 20	V
Collector Current	DC	I_C	100	A
	1 ms	I_{CP}	200	
Collector Power Dissipation		P_C	500	W
Junction Temperature Range		T_j	-40 to +150	$^\circ\text{C}$
Storage Temperature Range		T_{stg}	-40 to +125	$^\circ\text{C}$
Isolation Voltage (Terminal to Base AC, 1 min.)		V_{ISO}	2500	V
Mounting Torque	Module Base to Heatsink	F_{TOR}	3	N•m
	Bus Bar to Main Terminals			

ELECTRICAL CHARACTERISTICS ($T_c=25^\circ\text{C}$)

Characteristic		Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Emitter Cut-Off Current		I_{CES}	$V_{CE}=1200\text{V}, V_{GE}=0\text{V}$	-	-	2.0	mA
Gate-Emitter Leakage Current		I_{GES}	$V_{GE}=+/- 20\text{V}, V_{CE}=0\text{V}$	-	-	1.0	μA
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C=100\text{A}, V_{GE}=15\text{V}$	-	1.9	2.4	V
Gate-Emitter Threshold Voltage		$V_{GE(th)}$	$V_{CE}=5\text{V}, I_C=100\text{mA}$	4.0	-	8.0	V
Input Capacitance		C_{ies}	$V_{CE}=10\text{V}, V_{GE}=0\text{V}, f=1\text{MHz}$	-	8300	-	pF
Switching Time	Rise Time	t_r	$V_{CC}=600\text{V}$	-	0.25	0.45	μs
	Turn-on Time	t_{on}	$R_L=6\text{ohm}$	-	0.40	0.70	
	Fall Time	t_f	$R_G=10\text{ohm}$	-	0.25	0.35	
	Turn-off Time	t_{off}	$V_{GE}=+/- 15\text{V}$	-	0.80	1.10	

FREE WHEELING DIODES RATINGS & CHARACTERISTICS ($T_c=25^\circ\text{C}$)

Item		Symbol	Rated Value	Unit
Forward Current	DC	I_F	100	A
	1 ms	I_{FM}	200	

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Peak Forward Voltage	V_F	$I_F=100\text{A}, V_{GE}=0\text{V}$	-	1.9	2.4	V
Reverse Recovery Time	t_{rr}	$I_F=100\text{A}, V_{GE}=-10\text{V}, di/dt=200\text{A}/\mu\text{s}$	-	0.2	0.3	μs

THERMAL CHARACTERISTICS

Characteristic		Symbol	Test Condition	Min.	Typ.	Max.	Unit
Thermal Impedance	IGBT	$R_{th(j-c)}$	Junction to Case	-	-	0.24	$^\circ\text{C}/\text{W}$
	DIODE			-	-	0.42	

PBMB100B12

Fig.1- Output Characteristics (Typical)

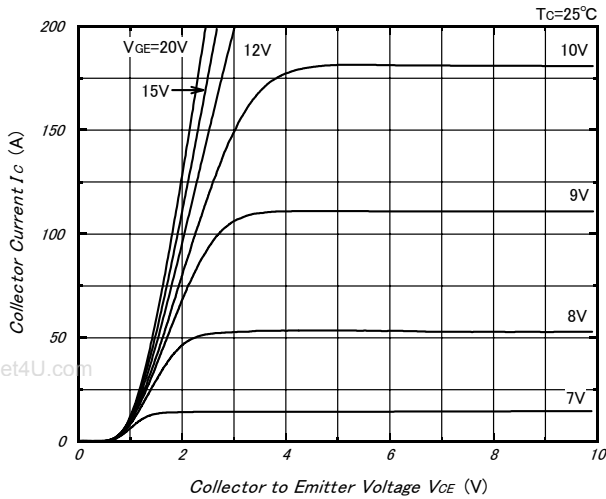


Fig.2- Collector to Emitter On Voltage vs. Gate to Emitter Voltage (Typical)

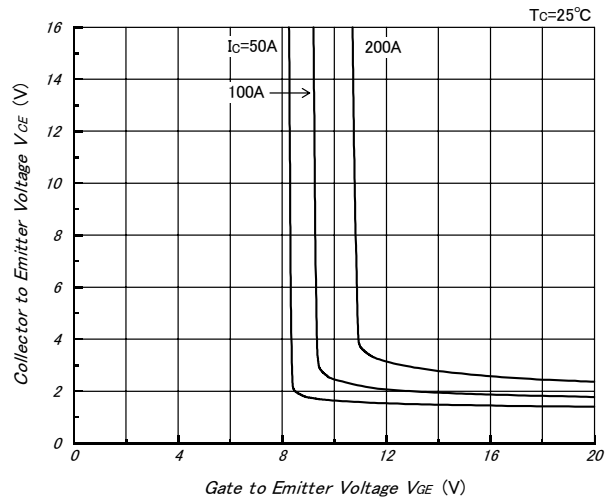


Fig.3- Collector to Emitter On Voltage vs. Gate to Emitter Voltage (Typical)

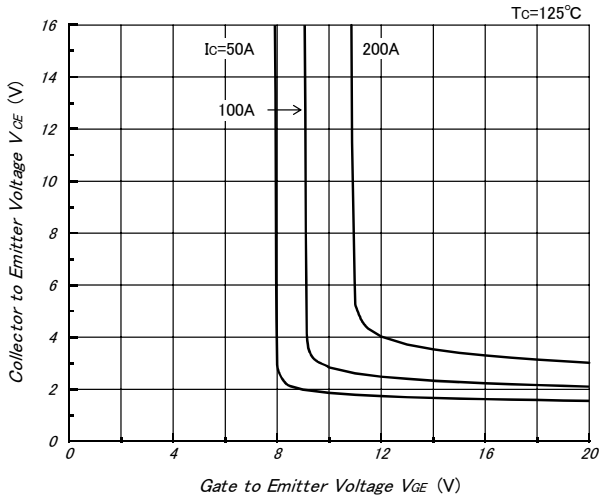


Fig.4- Gate Charge vs. Collector to Emitter Voltage (Typical)

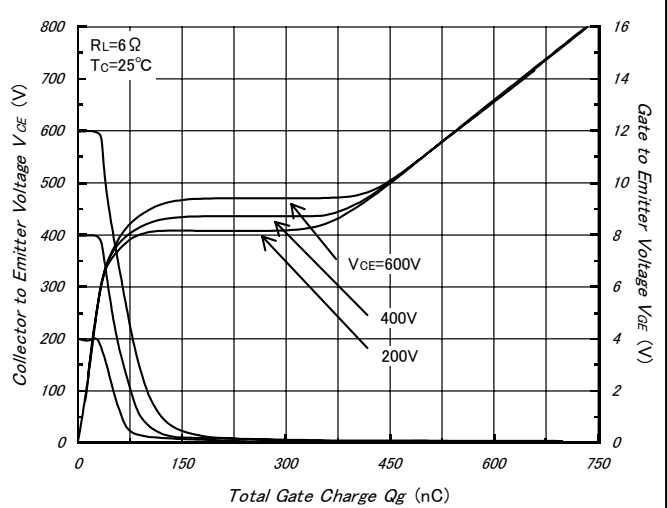


Fig.5- Capacitance vs. Collector to Emitter Voltage (Typical)


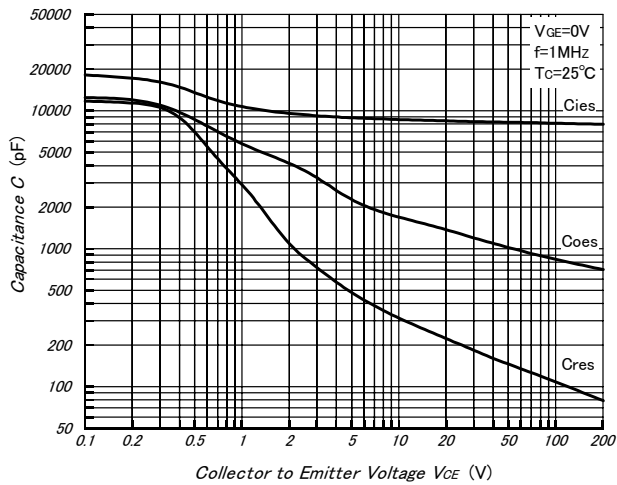


Fig.6- Collector Current vs. Switching Time (Typical)

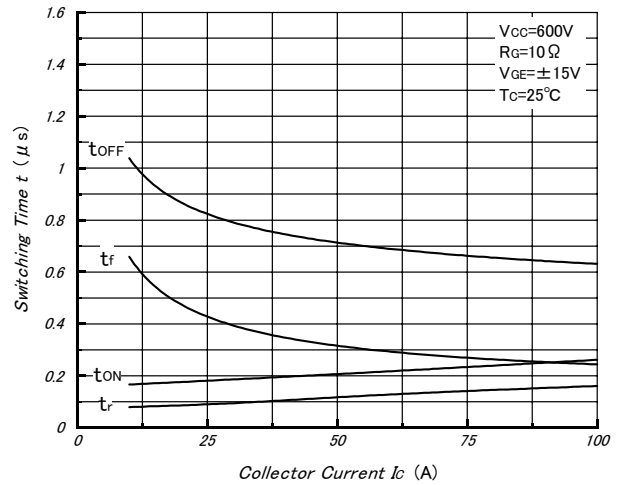

PBMB100B12

Fig.7- Series Gate Impedance vs. Switching Time (Typical)

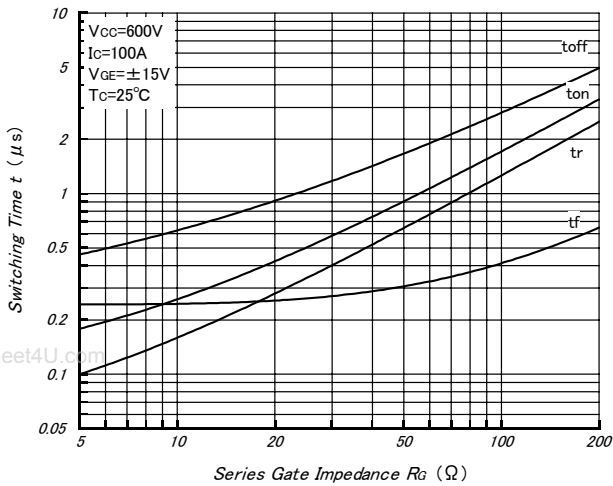


Fig.8- Forward Characteristics of Free Wheeling Diode (Typical)

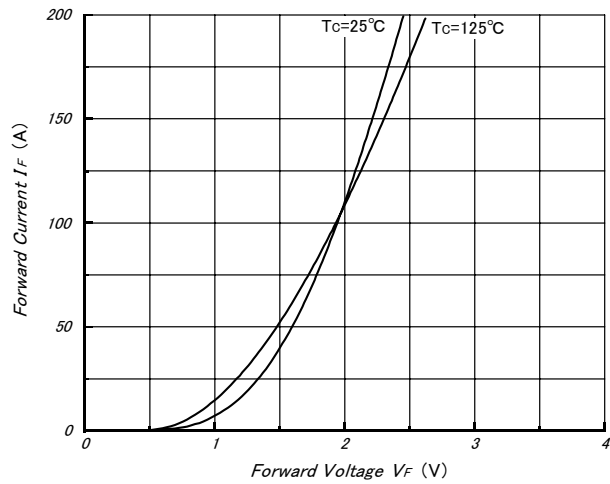


Fig.9- Reverse Recovery Characteristics (Typical)

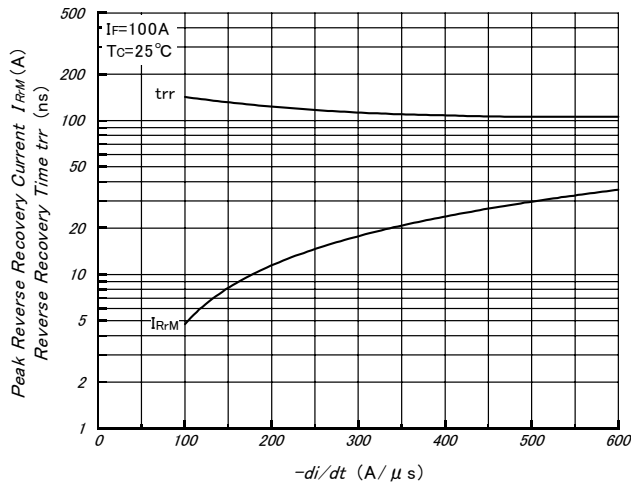


Fig.10- Reverse Bias Safe Operating Area (Typical)

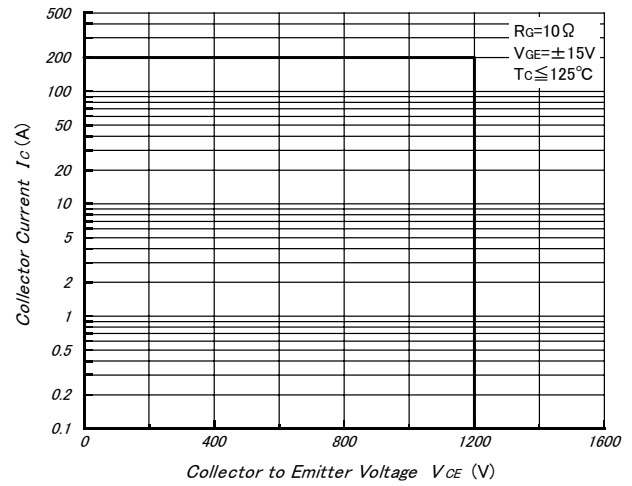


Fig.11- Transient Thermal Impedance

