





## Contents

### **1. SPECIFICATIONS**

- 1.1 Features**
- 1.2 Mechanical Specifications**
- 1.3 Absolute Maximum Ratings**
- 1.4 DC Electrical Characteristics**
- 1.5 Optical Characteristics**
- 1.6 Backlight Characteristics**

### **2. MODULE STRUCTURE**

- 2.1 Counter Drawing**
- 2.2 Interface Pin Description**
- 2.3 Timing Characteristics**
- 2.4 Display Command**
- 2.5 Character Pattern**

### **3. QUALITY ASSURANCE SYSTEM**

- 3.1 Quality Assurance Flow Chart**
- 3.2 Inspection Specification**

### **4. RELIABILITY TEST**

- 4.1 Reliability Test Condition**

### **5. PRECAUTION RELATING PRODUCT HANDLING**

- 5.1 Safety**
- 5.2 Handling**
- 5.3 Storage**
- 5.4 Terms of Warranty**

Note : For detailed information please refer to IC data sheet : **KS0066U,KS0065B**

## 1. SPECIFICATIONS

### 1.1 Features

| Item                        | Standard Value                               |
|-----------------------------|--|
| Display Type                | 12*2 Characteristics                         |
| LCD Type                    | STN Gray Positive Transflective Normal Temp. |
| Driver Condition            | LCD Module : 1/16 Duty , 1/4 Bias            |
| Viewing Direction           | 6 O' clock                                   |
| Backlight                   | YG LED B/L                                   |
| Weight                      | 23 g   |
| Interface                   | -  |
| Other(controller/driver IC) | -  |

### 1.2 Mechanical Specifications

| Item              | Standard Value                      | Unit |
|-------------------|-------------------------------------|------|
| Outline Dimension | 55.7 (L) * 32.0 (w) * 13.3 (H)(Max) | mm   |
| Viewing Area      | 46.7 (L) * 17.5 (w)                 | mm   |
| Active Area       | 37.85 (L) * 11.7 (w)                | mm   |
| Dot Size          | 0.45 (L) * 0.6 (w)                  | mm   |
| Dot Pitch         | 0.55 (L) * 0.7 (w)                  | mm   |

Note : For detailed information please refer to LCM drawing

### 1.3 Absolute Maximum Ratings

| Item                      | Symbol           | Condition           | Min.                  | Max.                 | Unit |
|---------------------------|------------------|---------------------|-----------------------|----------------------|------|
| Power Supply Voltage      | V <sub>DD</sub>  | -                   | -0.3                  | 7.0                  | V    |
| LCD Driver Supply Voltage | V <sub>LCD</sub> | -                   | V <sub>DD</sub> -15.0 | V <sub>DD</sub> +0.3 | V    |
| Input Voltage             | V <sub>IN</sub>  | -                   | -0.3                  | V <sub>DD</sub> +0.3 | V    |
| Operating Temperature     | T <sub>OP</sub>  | Excluded B/L        | 0                     | 50                   |      |
| Storage Temperature       | T <sub>ST</sub>  | Excluded B/L        | -20                   | 70                   |      |
| Storage Humidity          | H <sub>D</sub>   | T <sub>a</sub> < 40 | 20                    | 60                   | %RH  |

## 1.4 DC Electrical Characteristics

$V_{DD} = 5.0 \text{ V} \pm 10\%$  ,  $V_{SS} = 0\text{V}$  ,  $T_a = 25$

| Item                 | Symbol   | Condition                  | Min.               | Typ. | Max.     | Unit |
|----------------------|----------|----------------------------|--------------------|------|----------|------|
| Logic Supply Voltage | $V_{DD}$ | -                          | 4.5                | 5.0  | 5.5      | V    |
| “H” Input Voltage    | $V_{IH}$ | -                          | 0.7V <sub>DD</sub> | -    | $V_{DD}$ | V    |
| “L” Input Voltage    | $V_{IL}$ | -                          | -0.3               | -    | 0.6      | V    |
| “H” Output Voltage   | $V_{OH}$ | $I_{OH} = -0.205\text{mA}$ | 2.4                | -    | -        | V    |
| “L” Output Voltage   | $V_{OL}$ | $I_{OL} = 1.2\text{mA}$    | -                  | -    | 0.4      | V    |
| Supply Current       | $I_{DD}$ | $V_{DD} = 5.0 \text{ V}$   | -                  | 1.5  | -        | mA   |
| LCM Driver Voltage   | $V_{OP}$ | $V_{DD} - V_O (0^\circ)$   | -                  | -    | -        | V    |
|                      |          | $V_{DD} - V_O (25^\circ)$  | -                  | 3.8  | -        |      |
|                      |          | $V_{DD} - V_O (50^\circ)$  | -                  | -    | -        |      |


## 1.5 Optical Characteristics

LCD Panel : 1/16 Duty , 1/4 Bias ,  $V_{LCD} = 4.3 \text{ V}$  ,  $T_a = 25$

| Item                | Symbol   | Conditions                                | Min.       | Typ.   | Max. | Reference   |
|---------------------|----------|---|------------|--------|------|-------------|
| View Angle          | $\theta$ | $C \geq 2.0, \varnothing = 0^\circ$       | $40^\circ$ | -      | -    | Notes 1 & 2 |
| Contrast Ratio      | C        | $\theta = 5^\circ, \varnothing = 0^\circ$ | 5          | 7      | -    | Note 3      |
| Response Time(rise) | $t_r$    | $\theta = 5^\circ, \varnothing = 0^\circ$ | -          | 150 ms | -    | Note 4      |
| Response Time(fall) | $t_f$    | $\theta = 5^\circ, \varnothing = 0^\circ$ | -          | 300 ms | -    | Note 4      |


**Note 1: Definition of angles  $\theta$  and  $\varnothing$**

Light (when reflected)  $z$  ( $\theta=0^\circ$ )

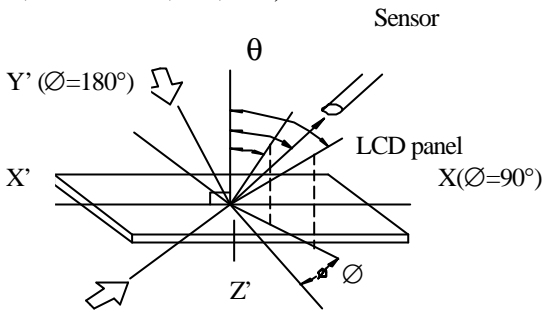

Light (when transmitted)  $Y$  ( $\varnothing=0^\circ$ )  
( $\theta=90^\circ$ )


**Note 2: Definition of viewing angles  $\theta_1$  and  $\theta_2$**

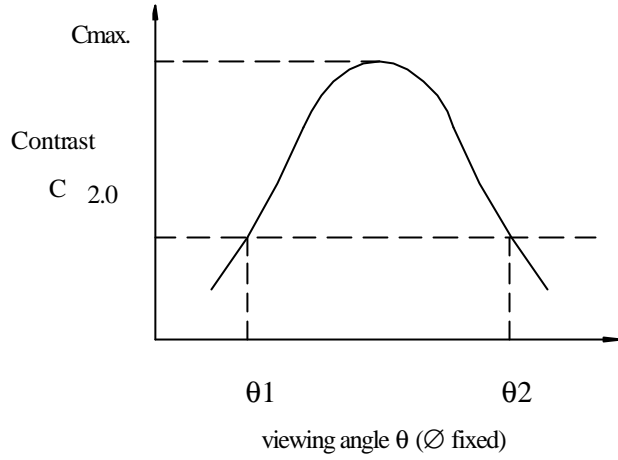


Note : Optimum viewing angle with the naked eye and viewing angle  $\theta$  at  $C_{max}$ . Above are not always the same

**Note 3: Definition of contrast C**

$$C = \frac{\text{Brightness (reflection) of unselected dot (B2)}}{\text{Brightness (reflection) of selected dot (B1)}}$$

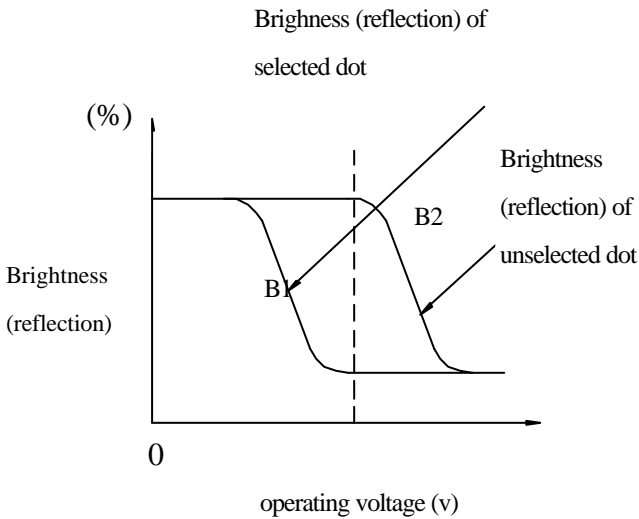

**Note 4: Definition of response time**

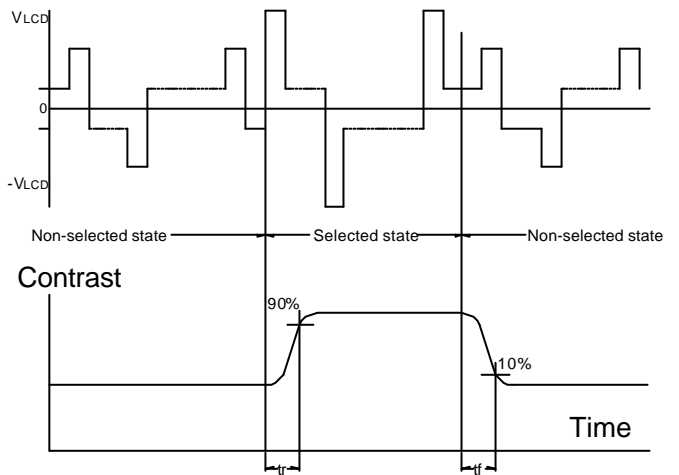

Note: Measured with a transmissive LCD panel which is displayed  $1 \text{ cm}^2$

$V_{LCD}$  : Operating voltage  $f_{FRM}$  : Frame frequency  
 $t_r$  : Response time (rise)  $t_f$  : Response time (fall)

## 1.6 Backlight Characteristics

LCD Module with LED Backlight

### Maximum Ratings

| Item                      | Symbol          | Conditions | Min. | Max. | Unit |
|---------------------------|-----------------|------------|------|------|------|
| Forward Current           | IF              | Ta =25     | -    | 200  | mA   |
| Reverse Voltage           | VR              | Ta =25     | -    | 8    | V    |
| Power Dissipation         | PO              | Ta =25     | -    | 0.92 | W    |
| Operating Temperature     | T <sub>OP</sub> | -          | -20  | 70   |      |
| Storage Temperature       | T <sub>ST</sub> | -          | -40  | 80   |      |
| Solder Temp. for 3 Second | -               | -          | -    | 260  |      |

### Electrical / Optical Characteristics

Ta =25

| Item                                | Symbol       | Conditions | Min. | Typ. | Max. | Unit              |
|-------------------------------------|--------------|------------|------|------|------|-------------------|
| Forward Voltage                     | VF           | IF=80 mA   | -    | 4.2  | 4.6  | V                 |
| Reverse Current                     | IR           | VR=8V      | -    | -    | 0.2  | mA                |
| Average Brightness<br>(with LCD)    | IV           | IF=80 mA   | -    | -    | -    | cd/m <sup>2</sup> |
| Wavelength                          | p            | IF=80 mA   | 571  | -    | 576  | nm                |
| Luminous Intensity<br>(without LCD) | IV           | IF=80 mA   | 150  | 190  | -    | cd/m <sup>2</sup> |
| Color                               | Yellow-green |            |      |      |      |                   |






## 2.2 Interface Pin Description


| Pin No. | Symbol           | Signal Description   |
|---------|------------------|--|
| 1       | VSS/K            | Power Supply ( $V_{SS}=0$ ); Power supply LED backlight (-)  |
| 2       | VDD              | Power Supply ( $V_{DD}>V_{SS}$ )   |
| 3       | V <sub>O</sub>   | Operating voltage for LCD  |
| 4       | RS               | Register Selection input<br>High = Data register<br>Low = Instruction register (for write)<br>Busy flag address counter (for read)   |
| 5       | $\overline{R/W}$ | Read/Write signal input is used to select the read/write mode<br>High = Read mode, Low = Write mode  |
| 6       | E                | Start enable signal to read or write the data  |
| 7~10    | DB0 ~ DB3        | Four low order bi-directional three-state data bus lines.<br>Used for data transfer between the MPU and the LCD module.<br>These four are not used during 4-bit operation. |
| 11~14   | DB4 ~ DB7        | Four high order bi-directional three-state data bus lines.<br>Used for data transfer between the MPU and the LCD module.<br>DB7 can be used as a busy flag.                |
| 15      | A                | Power supply LED backlight (+)   |

Contrast Adjust

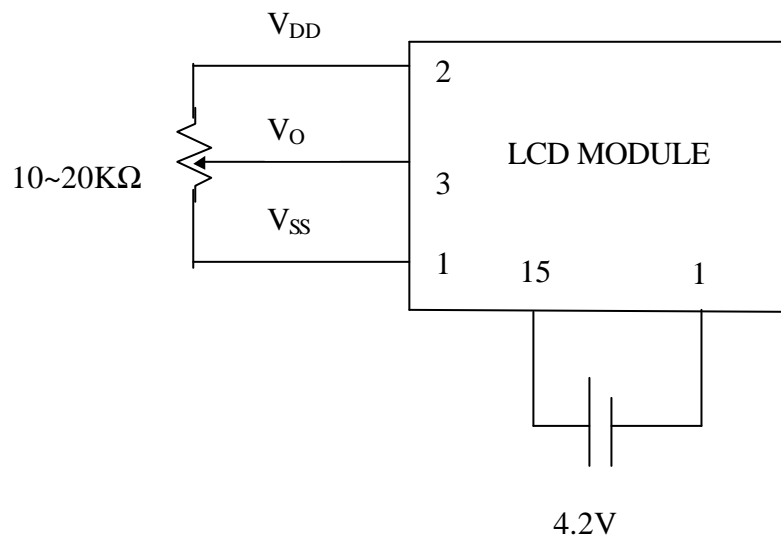


## 2.3 Timing Characteristics

- Read cycle

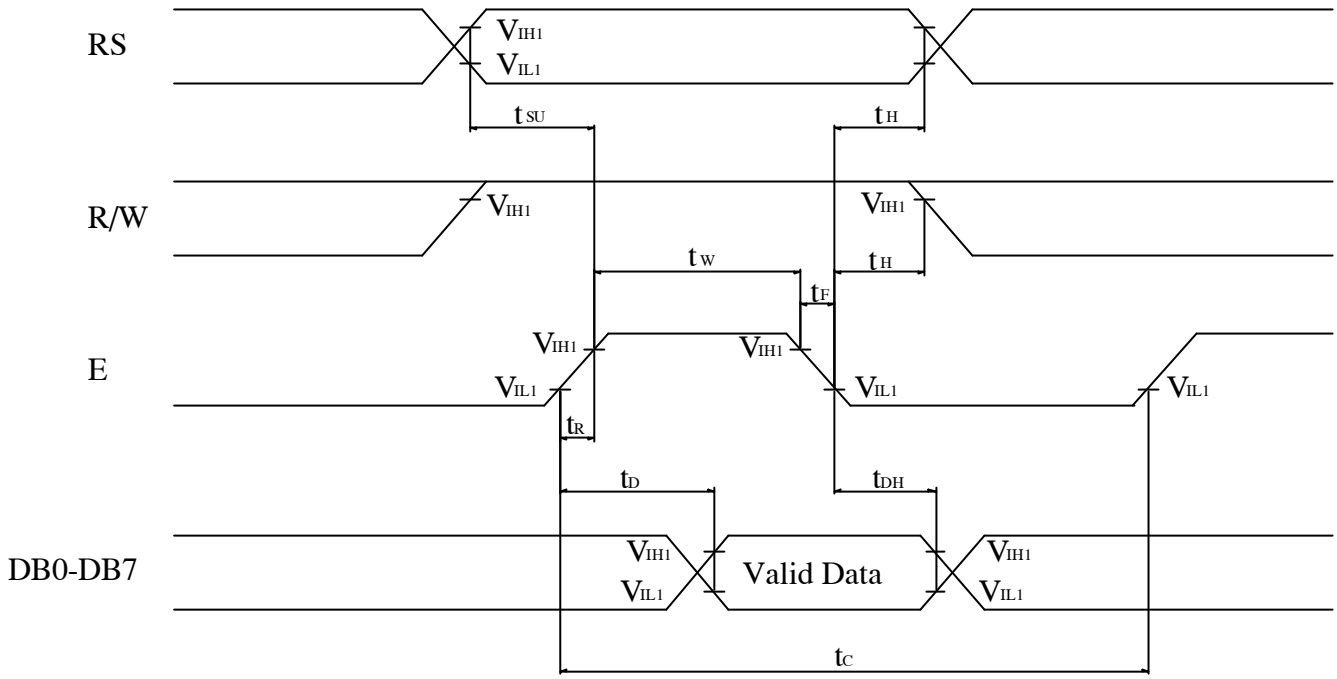

- Write cycle

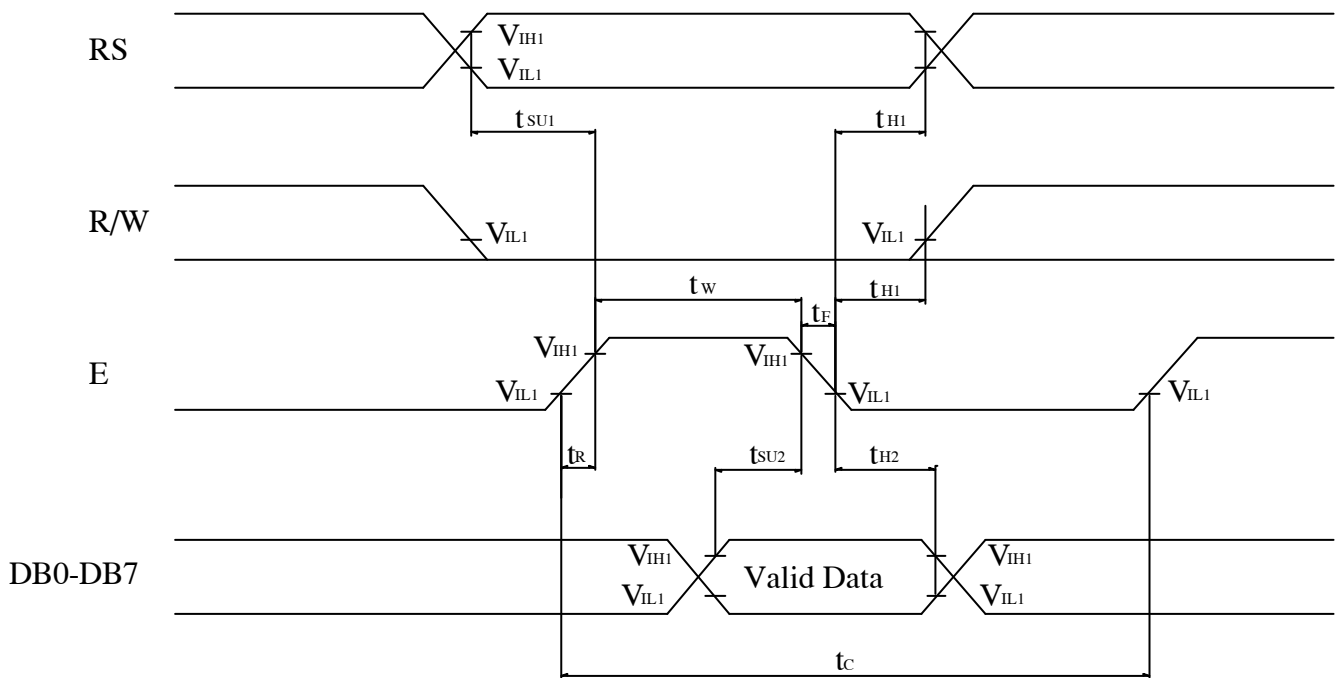

- Read cycle

VDD=4.5V~5.5V, Ta=25

| Characteristics           | Symbol     | Min. | Typ. | Max. | Unit |
|---------------------------|------------|------|------|------|------|
| E Cycle Time              | $t_C$      | 500  | -    | -    | ns   |
| E Rise / Fall Time        | $t_R, t_F$ | -    | -    | 20   | ns   |
| E Pulse Width (High, Low) | $t_W$      | 230  | -    | -    | ns   |
| R/W and RS Setup Time     | $t_{SU}$   | 40   | -    | -    | ns   |
| R/W and RS Hold Time      | $t_H$      | 10   | -    | -    | ns   |
| Data Output Delay Time    | $t_D$      | -    | -    | 120  | ns   |
| Data Hold Time            | $t_{DH}$   | 5    | -    | -    | ns   |

- Write cycle

| Characteristics           | Symbol     | Min. | Typ. | Max. | Unit |
|---------------------------|------------|------|------|------|------|
| E Cycle Time              | $t_C$      | 500  | -    | -    | ns   |
| E Rise / Fall Time        | $t_R, t_F$ | -    | -    | 20   | ns   |
| E Pulse Width (High, Low) | $t_W$      | 230  | -    | -    | ns   |
| R/W and RS Setup Time     | $t_{SU1}$  | 40   | -    | -    | ns   |
| R/W and RS Hold Time      | $t_{H1}$   | 10   | -    | -    | ns   |
| Data Setup Time           | $t_{SU2}$  | 80   | -    | -    | ns   |
| Data Hold Time            | $t_{H2}$   | 10   | -    | -    | ns   |

## 2.4 Display Command

| Instructions            | Instruction Code |     |     |     |     |     |     |     |     |     | Description | Execution Time<br>(fosc = 270KHZ)  |        |
|-------------------------|------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-------------|--|--------|
|                         | RS               | R/W | DB7 | DB6 | DB5 | DB4 | DB3 | DB2 | DB1 | DB0 |             |  |        |
| Clear Display           | 0                | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 1           | Write "20H" to DDRAM. and set DDRAM address to "00H" from AC.  | 1.53ms |
| Return Home             | 0                | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 1   | ×           | Set DDRAM address to "00H" from AC and return cursor to it's original position if shifted.<br>The contents of DDRAM are not changed. | 1.53ms |
| Entry Mode Set          | 0                | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 1   | I/D | SH          | Assign cursor moving direction and make shift of entire display enable.  | 39μs   |
| Display ON/OFF Control  | 0                | 0   | 0   | 0   | 0   | 0   | 0   | 1   | D   | C   | B           | Sets display (D), cursor(C), and blinking of cursor(B) on/off control bit.   | 39μs   |
| Cursor or Display Shift | 0                | 0   | 0   | 0   | 0   | 0   | 1   | S/C | R/L | ×   | ×           | Set cursor moving and display shift control bit, and the direction, without changing of DDRAM data.                                  | 39μs   |
| Function Set            | 0                | 0   | 0   | 0   | 0   | 1   | DL  | N   | F   | ×   | ×           | Set interface data length (DL:4 - bit/8-bit), numbers of display line (N: 1-line/2-line), display font type(F:5*8 dots/5*11 dots)    | 39μs   |
| Set CGRAM Address       | 0                | 0   | 0   | 1   | AC5 | AC4 | AC3 | AC2 | AC1 | AC0 |             | Set CGRAM address in address counter.  | 39μs   |
| Set DDRAM Address       | 0                | 0   | 1   | AC6 | AC5 | AC4 | AC3 | AC2 | AC1 | AC0 |             | Set DDRAM address in address counter.  | 39μs   |

|                            |   |   |    |     |     |     |     |     |     |     |  |            |
|----------------------------|---|---|----|-----|-----|-----|-----|-----|-----|-----|--|------------|
| Read Busy Flag and Address | 0 | 1 | BF | AC6 | AC5 | AC4 | AC3 | AC2 | AC1 | AC0 | Whether during internal operation or not can be known by reading BF. The contents of address counter can also be read. | 0 $\mu$ s  |
| Write Data to RAM          | 1 | 0 | D7 | D6  | D5  | D4  | D3  | D2  | D1  | D0  | Write data into internal RAM (DDRAM/CGRAM).  | 43 $\mu$ s |
| Read Data from RAM         | 1 | 1 | D7 | D6  | D5  | D4  | D3  | D2  | D1  | D0  | Read data from internal RAM (DDRAM/CGRAM).   | 43 $\mu$ s |

"x ":don't care


## 2.5 Character Pattern


### CHARACTER PATTERN(SO/HO/EA,WA)

| Lower 4 Bits \ Upper 4 Bits | 0000       | 0001 | 0010 | 0011 | 0100 | 0101 | 0110 | 0111 | 1000 | 1001 | 1010 | 1011 | 1100 | 1101 | 1110 | 1111 |
|-----------------------------|------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| xxxx0000                    | CG RAM (1) |      |      | 0    | A    | P    | \    | P    |      |      |      | —    | 9    | 3    | 0    | P    |
| xxxx0001                    | (2)        | !    | 1    | A    | a    | a    |      |      | =    | P    | +    | +    | +    | +    | +    | +    |
| xxxx0010                    | (3)        | "    | 2    | B    | R    | b    | r    |      |      | +    | +    | +    | +    | +    | +    | +    |
| xxxx0011                    | (4)        | #    | 3    | C    | S    | c    | s    |      |      | +    | +    | +    | +    | +    | +    | +    |
| xxxx0100                    | (5)        | *    | 4    | D    | T    | d    | t    |      |      | +    | +    | +    | +    | +    | +    | +    |
| xxxx0101                    | (6)        | %    | 5    | E    | U    | e    | u    |      |      | +    | +    | +    | +    | +    | +    | +    |
| xxxx0110                    | (7)        | &    | 6    | F    | V    | f    | v    |      |      | +    | +    | +    | +    | +    | +    | +    |
| xxxx0111                    | (8)        | '    | 7    | G    | W    | g    | w    |      |      | +    | +    | +    | +    | +    | +    | +    |
| xxxx1000                    | (1)        | (    | 8    | H    | X    | h    | x    |      |      | +    | +    | +    | +    | +    | +    | +    |
| xxxx1001                    | (2)        | )    | 9    | I    | Y    | i    | y    |      |      | +    | +    | +    | +    | +    | +    | +    |
| xxxx1010                    | (3)        | *    | :    | J    | Z    | j    | z    |      |      | +    | +    | +    | +    | +    | +    | +    |
| xxxx1011                    | (4)        | +    | ;    | K    | 3    | k    | 3    |      |      | +    | +    | +    | +    | +    | +    | +    |
| xxxx1100                    | (5)        | .    | <    | L    | 4    | l    | 4    |      |      | +    | +    | +    | +    | +    | +    | +    |
| xxxx1101                    | (6)        | —    | =    | M    | 5    | m    | 5    |      |      | +    | +    | +    | +    | +    | +    | +    |
| xxxx1110                    | (7)        | ,    | >    | N    | 6    | n    | 6    |      |      | +    | +    | +    | +    | +    | +    | +    |
| xxxx1111                    | (8)        | /    | ?    | O    | 7    | o    | 7    |      |      | +    | +    | +    | +    | +    | +    | +    |

### 3. QUALITY ASSURANCE SYSTEM

#### 3.1 Quality Assurance Flow Chart

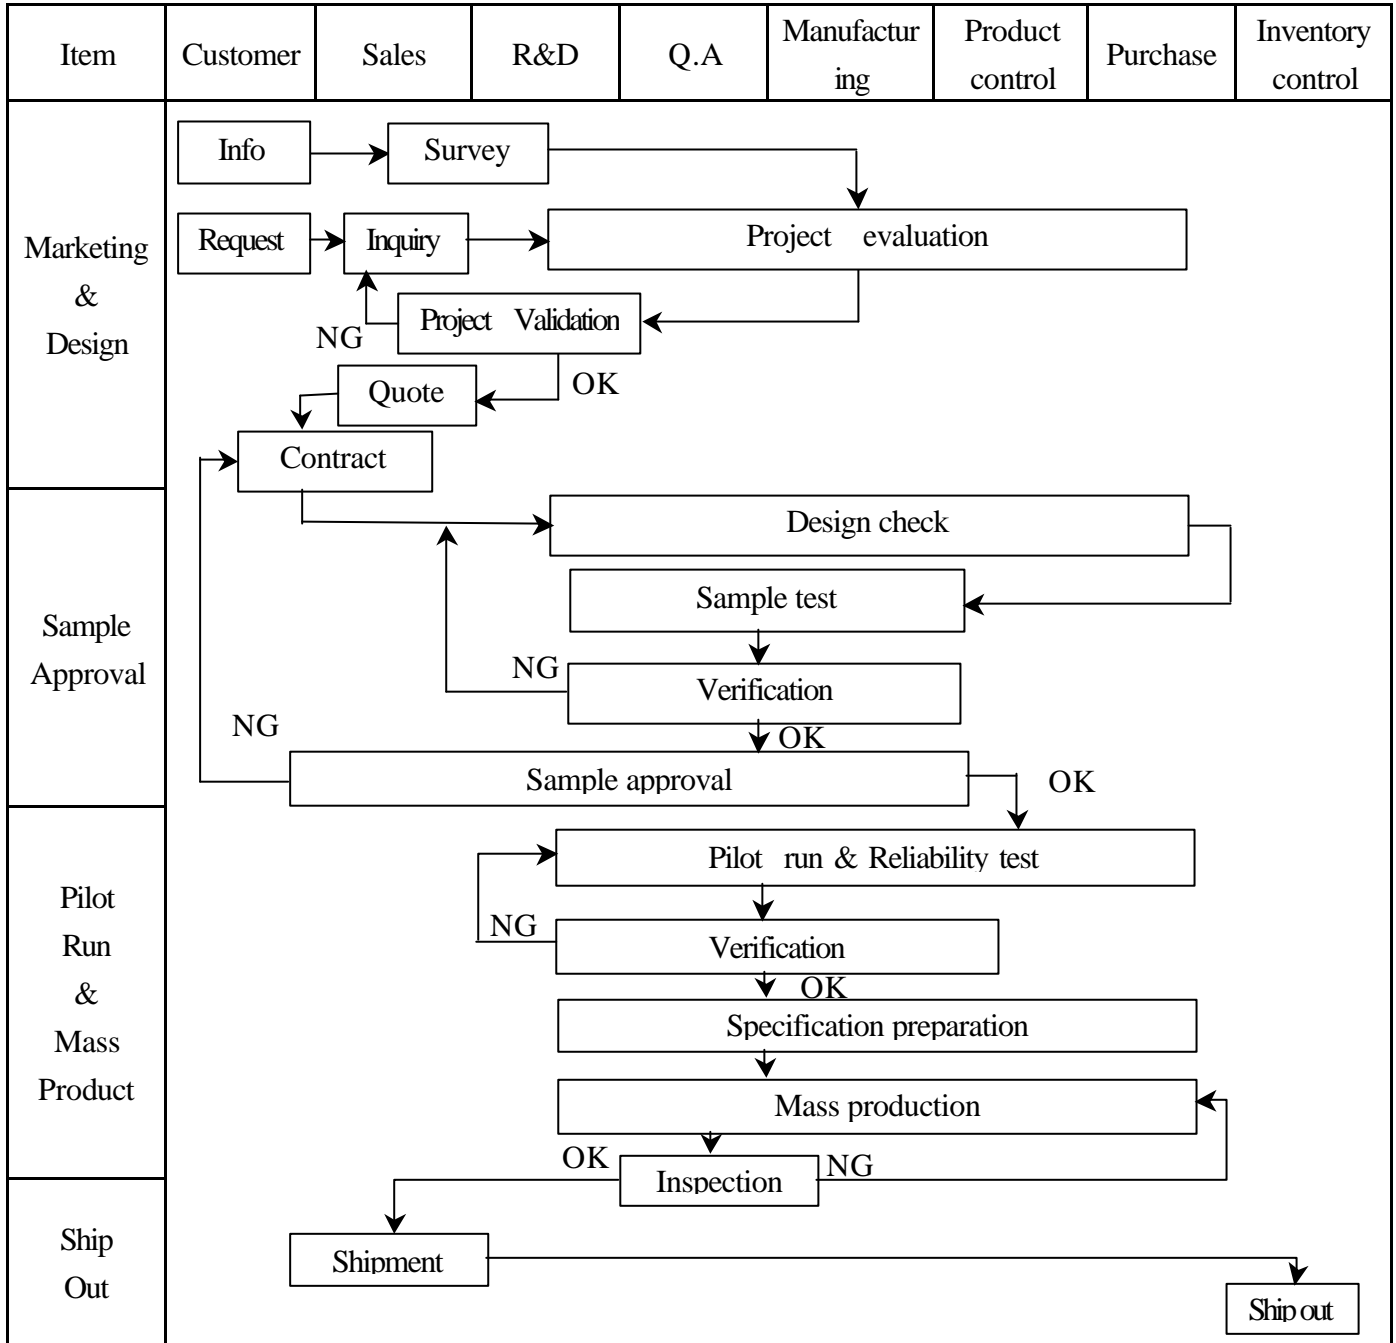
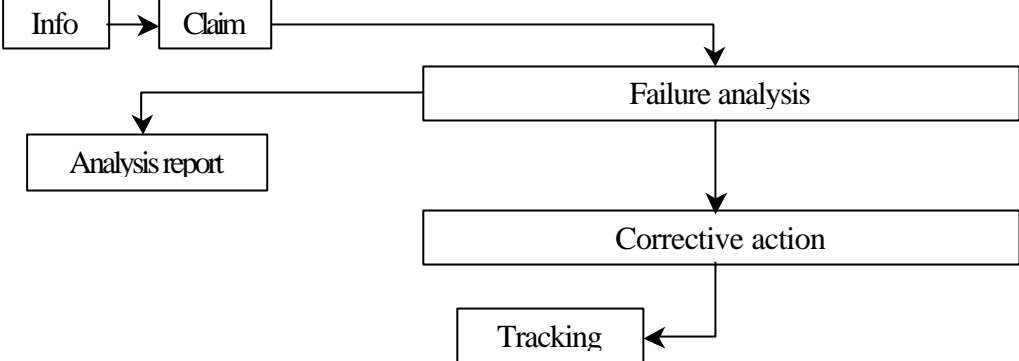
| Item          | Customer  | Sales | R&D | Q.A | Manufacturing   | Product control | Purchase | Inventory control |
|---------------|---|-------|-----|-----|---|-----------------|----------|-------------------|
| Sales Service |  <pre> graph TD     Info[Info] --&gt; Claim[Claim]     Claim --&gt; Failure[Failure analysis]     Failure --&gt; Report[Analysis report]     Failure --&gt; Action[Corrective action]     Action --&gt; Tracking[Tracking]         </pre> |       |     |     |   |                 |          |                   |
| Q.A Activity  | 1. ISO 9001 Maintenance Activities<br>3. Equipment calibration<br>5. Standardization Management   |       |     |     | 2. Process improvement proposal<br>4. Education And Training Activities |                 |          |                   |



### 3.2 Inspection Specification

Inspection Standard : MIL-STD-105E Table Normal Inspection Single Sampling Level .

Equipment : Gauge, MIL-STD, Powertip Tester, Sample.


IQC Defect Level : Major Defect AQL 0.4; Minor Defect AQL 1.5.

FQC Defect Level : 100% Inspection.

OUT Going Defect Level : Sampling.

Specification :

| NO   | Item  | Specification  | Judge | Level |
|--|---|--|-------|-------|
| 1  | Part Number   | The part number is inconsistent with work order of production                                  | N.G.  | Major |
| 2  | Quantity  | The quantity is inconsistent with work order of production                                     | N.G.  | Major |
| 3  | Electronic characteristics of LCM<br>$A = (L + W) \div 2$                                   | The display lacks of some patterns.  | N.G.  | Major |
|  |   | Missing line.  | N.G.  | Major |
|  |   | The size of missing dot, A is $> 1/2$ Dot size   | N.G.  | Major |
|  |   | There is no function.  | N.G.  | Major |
|  |   | Output data is error   | N.G.  | Major |
| 4  | Appearance of LCD<br>$A = (L + W) \div 2$<br><br>Dirty particle (Including scratch, bubble) | Material is different with work order of production  | N.G.  | Major |
|  |   | LCD is assembled in inverse direction  | N.G.  | Major |
|  |   | Bezel is assembled in inverse direction  | N.G.  | Major |
|  |   | Shadow is within LCD viewing area + 0.5 mm   | N.G.  | Major |
|  |   | The diameter of dirty particle, A is $> 0.4$ mm  | N.G.  | Minor |
|  |   | Dirty particle length is $> 3.0$ mm, and $0.01$ mm $<$ width 0.05mm                            | N.G.  | Minor |
|  |   | Display is without protective film   | N.G.  | Minor |
|  |   | Conductive rubber is over bezel 1mm  | N.G.  | Minor |
|  |   | Polarizer exceeds over viewing area of LCD   | N.G.  | Minor |
|  |   | Area of bubble in polarizer, A $> 1.0$ mm, the number of bubble is $> 1$ piece.                | N.G.  | Minor |
|  |   | $0.4$ mm $<$ Area of bubble in polarizer, A $< 1.0$ mm, the number of bubble is $> 4$ pieces.  | N.G.  | Minor |
| 5  | Appearance of PCB<br>$A = (L + W) \div 2$   | Burned area or wrong part number is on PCB   | N.G.  | Major |
|  |   | The symbol, character, and mark of PCB are unidentifiable.                                     | N.G.  | Minor |
|  |   | The stripped solder mask, A is $> 1.0$ mm  | N.G.  | Minor |
|  |   | $0.3$ mm $<$ stripped solder mask or visible circuit, A $< 1.0$ mm, and the number is 4 pieces | N.G.  | Minor |
|  |   | There is particle between the circuits in solder mask  | N.G.  | Minor |
|  |   | The circuit is peeled off or cracked   | N.G.  | Minor |
|  |   | There is any circuits risen or exposed.  | N.G.  | Minor |
|  |   | $0.2$ mm $<$ Area of solder ball, A is 0.4mm   | N.G.  | Minor |
|  |   | The number of solder ball is 3 pieces  | N.G.  | Minor |
| The magnitude of solder ball, A is $> 0.4$ mm. | N.G.  | Minor  |       |       |
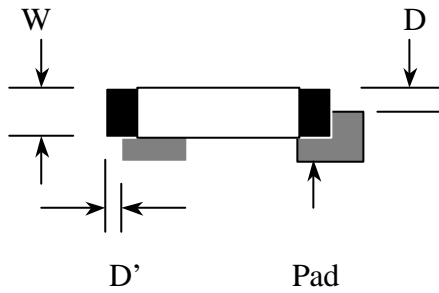
| NO | Item   | Specification  | Judge | Level |
|----|--|--|-------|-------|
| 6  | Appearance of molding<br>$A=(L+W) \div 2$                  | The shape of modeling is deformed by touching.   | N.G.  | Major |
|    |  | Insufficient epoxy: Circuit or pad of IC is visible  | N.G.  | Minor |
|    |  | Excessive epoxy: Diameter of modeling is $> 20\text{mm}$ or height is $> 2.5\text{mm}$                         | N.G.  | Minor |
|    |  | The diameter of pinhole in modeling, A is $> 0.2\text{mm}$ .   | N.G.  | Minor |
| 7  | Appearance of frame<br>$A=(L+W) \div 2$                    | The folding angle of frame must be $> 45 +10$  | N.G.  | Minor |
|    |  | The area of stripped electroplate in top-view of frame, A is $> 1.0\text{mm}$ .                                | N.G.  | Minor |
|    |  | Rust or crack is (Top view only)   | N.G.  | Minor |
|    |  | The scratched width of frame is $> 0.06\text{mm}$ . (Top view only)  | N.G.  | Minor |
| 8  | Electrical characteristic of backlight<br>$A=(L+W) \div 2$ | The color of backlight is nonconforming  | N.G.  | Major |
|    |  | Backlight can't work normally.   | N.G.  | Major |
|    |  | The LED lamp can't work normally   | N.G.  | Major |
|    |  | The unsoldering area of pin for backlight, A is $> 1/2$ solder joint area.                                     | N.G.  | Minor |
|    |  | The height of solder pin for backlight is $> 2.0\text{mm}$   | N.G.  | Minor |
| 10 | Assembly parts<br>$A=(L+W) \div 2$                         | The mark or polarity of component is unidentifiable.   | N.G.  | Minor |
|    |  | The height between bottom of component and surface of the PCB is floating $> 0.7\text{mm}$                     | N.G.  | Minor |
|    |  | $D > 1/4W$<br>              | N.G.  | Minor |
|    |  | End solder joint width, D' is $> 50\%$ width of component termination or width of pad                          | N.G.  | Minor |
|    |  | Side overhang, D is $> 25\%$ width of component termination.   | N.G.  | Minor |
|    |  | Component is cracked, deformed, and burned, etc.   | N.G.  | Minor |
|    |  | The polarity of component is placed in inverse direction.  | N.G.  | Minor |
|    |  | Maximum fillet height of solder extends onto the component body or minimum fillet height is $< 0.5\text{mm}$ . | N.G.  | Minor |



## **5. PRECAUTION RELATING PRODUCT HANDLING**

### **5.1 SAFETY**

- 5.1.1 If the LCD panel breaks , be careful not to get the liquid crystal to touch your skin.
- 5.1.2 If the liquid crystal touches your skin or clothes , please wash it off immediately by using soap and water.

### **5.2 HANDLING**

- 5.2.1 Avoid any strong mechanical shock which can break the glass.
- 5.2.2 Avoid static electricity which can damage the CMOS LSI—When working with the module , be sure to ground your body and any electrical equipment you may be using.
- 5.2.3 Do not remove the panel or frame from the module.
- 5.2.4 The polarizing plate of the display is very fragile. So , please handle it very carefully ,do not touch , push or rub the exposed polarizing with anything harder than an HB pencil lead (glass , tweezers , etc.)
- 5.2.5 Do not wipe the polarizing plate with a dry cloth , as it may easily scratch the surface of plate.
- 5.2.6 Do not touch the display area with bare hands , this will stain the display area.
- 5.2.7 Do not use ketonics solvent & aromatic solvent. Use with a soft cloth soaked with a cleaning naphtha solvent.

### **5.3 STORAGE**

- 5.3.1 Store the panel or module in a dark place where the temperature is  $25 \pm 5$  and the humidity is below 65% RH.
- 5.3.2 Do not place the module near organics solvents or corrosive gases.
- 5.3.3 Do not crush , shake , or jolt the module.

### **5.4 TERMS OF WARRANTY**

- 5.4.1 Applicable warrant period  
The period is within thirteen months since the date of shipping out under normal using and storage conditions.
- 5.4.2 Unaccepted responsibility  
This product has been manufactured to your company' s specification as a part for use in your company' s general electronic products. It is guaranteed to perform according to delivery specifications. For any other use apart from general electronic equipment , we cannot take responsibility if the product is used in nuclear power control equipment , aerospace equipment , fire and security systems or any other applications in which there is a direct risk to human life and where extremely high levels of reliability are required.