

PCS1P2858A

Product Preview Multi-Output Clock Generator

Description

The PCS1P2858A is a versatile multi output clock generator. The PCS1P2858A uses the latest PLL technology. The six Clock outputs are generated using an inexpensive 27 MHz Crystal. The accuracy of the 27 MHz Input Clock should be within ± 50 ppm. The outputs consist of 24.576 MHz, 24 MHz, 10 MHz, and 28.322 MHz clocks together with two 27 MHz reference clocks. The OE tri-states all the clocks when disabled. The device operates from a Supply Voltage of $3.3\text{ V} \pm 5\%$. The device is available in a 16-pin TSSOP JEDEC package.

Application

PCS1P2858A is targeted for use in HDTV digital video.

Features


- Generates Multiple Clock Outputs from an Inexpensive 27 MHz Crystal
- Multiple Clock Outputs:
 - ◆ 27 MHz Reference Clock
 - ◆ 27 MHz Reference Clock
 - ◆ 10 MHz
 - ◆ 24 MHz
 - ◆ 28.322 MHz
 - ◆ 24.576 MHz
- Supply Voltage: $3.3\text{ V} \pm 5\%$ V
- 16-pin TSSOP Package
- Commercial Temperature Range
- Low-power CMOS Process
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

This document contains information on a product under development. ON Semiconductor reserves the right to change or discontinue this product without notice.




ON Semiconductor®

<http://onsemi.com>



TSSOP-16
T SUFFIX
CASE 948AN

PIN CONFIGURATION

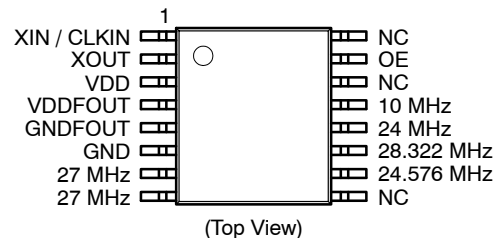

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 6 of this data sheet.

PCS1P2858A

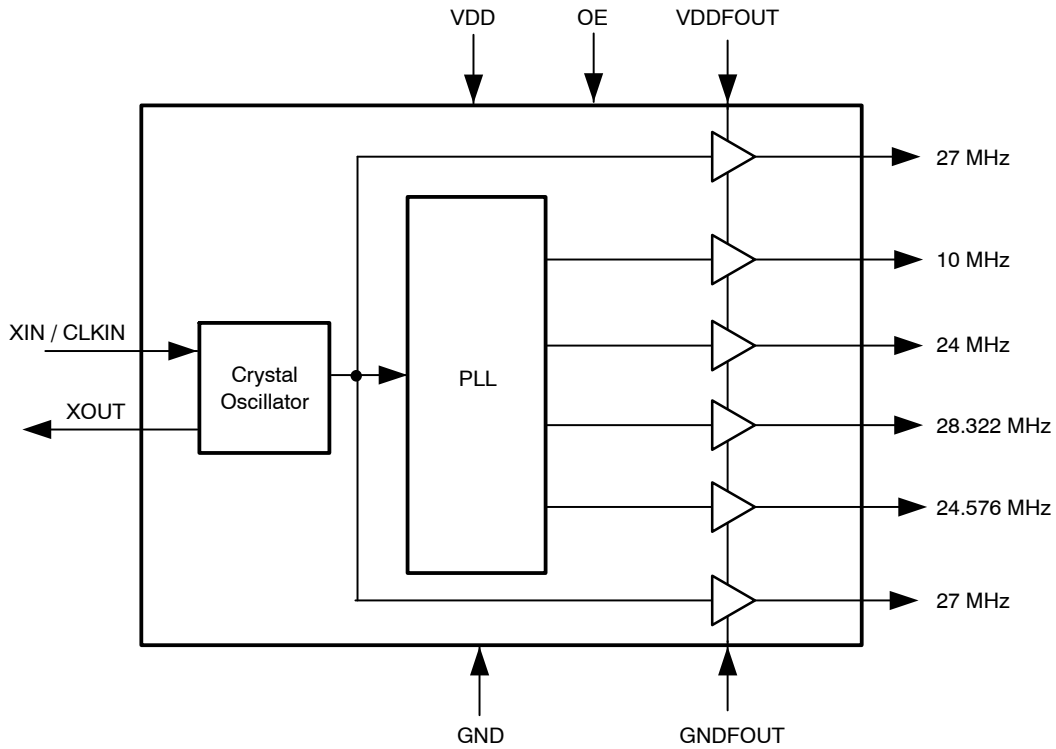


Figure 1. Block Diagram

Table 1. PIN DESCRIPTION

Pin #	Pin Name	Pin Type	Pin Description
1	XIN / CLKIN	Input	Crystal connection or External reference Clock input.
2	XOUT	Output	Connection to crystal. If using an external reference clock, this pin must be left unconnected.
3	VDD	Power	Connect to +3.3 V.
4	VDDFOUT	Power	Connect to +3.3 V.
5	GNDFOUT	Power	Connect to ground.
6	GND	Power	Connect to ground.
7	27 MHz	Output	27 MHz Reference Clock output.
8	27 MHz	Output	27 MHz Reference Clock output.
9	NC	-	No connection.
10	24.576 MHz	Output	24.576 MHz Output Clock.
11	28.322 MHz	Output	28.322 MHz Output Clock.
12	24 MHz	Output	24 MHz Output Clock.
13	10 MHz	Output	10 MHz Output Clock.
14	NC	-	No connection.
15	OE	Input	Output Enable bit. When this pin is made HIGH, the output clocks are enabled. Tri-states all the clocks when disabled. Has an Internal pull-up resistor.
16	NC	-	No connection.

PCS1P2858A

Table 2. ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Rating	Unit
VDD	Power Supply Voltage relative to Ground	-0.5 to +4.6	V
V _{IN}	Input Voltage relative to Ground (Input Pins)	-0.5 to VDD+0.3	
T _{STG}	Storage temperature	-65 to +150	°C
T _s	Max. Soldering Temperature (10 sec)	260	°C
T _J	Junction Temperature	125	°C
T _{DV}	Static Discharge Voltage (As per JEDEC STD22- A114-B)	2	KV

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

Table 3. OPERATING CONDITIONS

Parameter	Description	Min	Typ	Max	Unit
VDD / VDDFOUT	Operating Voltage	3.135	3.3	3.465	V
T _A	Operating Temperature (Ambient Temperature)	0		+70	°C
C _L	Load Capacitance			15	pF
C _{IN}	Input Capacitance		5		pF

Table 4. DC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Conditions	Min	Typ	Max	Units
VDD	Operating Voltage		3.135	3.3	3.465	V
V _{IH}	Input High Voltage		2		VDD+0.3	V
V _{IL}	Input Low Voltage		GND-0.3		0.8	V
V _{OH}	Output High Voltage	I _{OH} = -12 mA	2.4			V
V _{OL}	Output Low Voltage	I _{OL} = 12 mA			0.4	V
I _{OS}	Short Circuit Current	Clock outputs		±70		mA
I _{CC}	Static Current	CLKIN Pin pulled low			10	mA
I _{DD}	Dynamic Current	No Load, All Clocks on			30	mA
Z _{OUT}	Nominal output impedance			30		Ω

PCS1P2858A

Table 5. AC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Min	Typ	Max	Unit
CLKIN	Input Clock frequency		27		MHz
CLK OUT	Output Clock frequency		27		MHz
			10		
			24		
			24.576		
			28.322		
t_{LH} (Note 1)	Output rise time (Measured from 0.8 V to 2.0 V)	0.8	1.4	2.0	nS
t_{HL} (Note 1)	Output fall time (Measured from 2.0 V to 0.8 V)	0.8	1.4	2.0	nS
t_{JC}	Period Jitter		± 300		pS
	Synthesis Error (Output Frequency)	28.322 MHz	5.68		ppm
		Other outputs	0		
t_D (Note 1)	Output duty cycle	45	50	55	%
t_{ON}	Power up Time (first locked cycle after power-up)		3	5	mS

1. t_{LH} and t_{HL} are measured into a capacitive load of 15 pF.

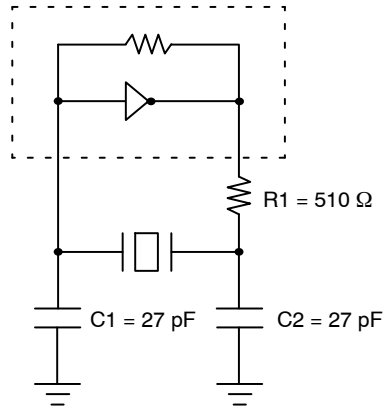


Figure 2. Typical Crystal Oscillator Circuit


Table 6. TYPICAL CRYSTAL SPECIFICATIONS

Fundamental AT Cut Parallel Resonant Crystal	
Nominal frequency	27 MHz
Frequency tolerance	± 50 ppm or better at 25°C
Operating temperature range	-25°C to +85°C
Storage temperature	-40°C to +85°C
Load capacitance	18 pF
Shunt capacitance	7 pF maximum
ESR	25 Ω



PCS1P2858A

PACKAGE DIMENSIONS

TSSOP16, 4.4x5
CASE 948AN-01
ISSUE O

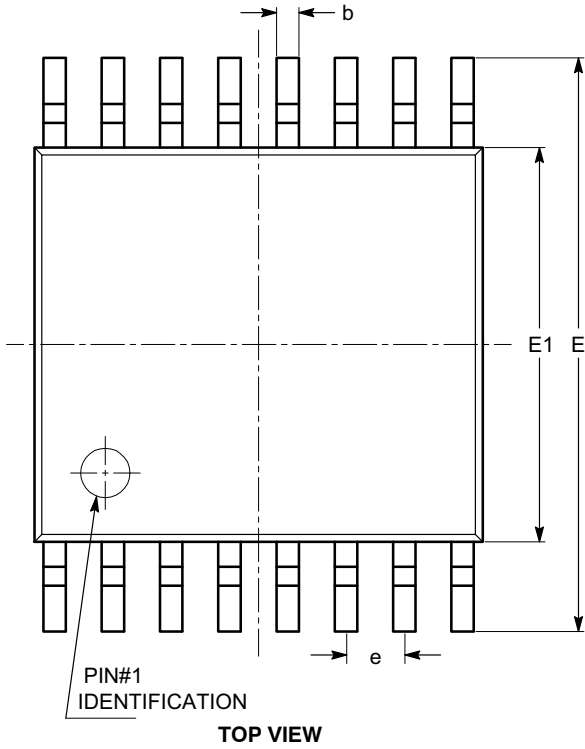

SYMBOL	MIN	NOM	MAX
A			1.10
A1	0.05		0.15
A2	0.85		0.95
b	0.19		0.30
c	0.13		0.20
D	4.90		5.10
E	6.30		6.50
E1	4.30		4.50
e	0.65 BSC		
L	1.00 REF		
L1	0.45		0.75
θ	0°		8°

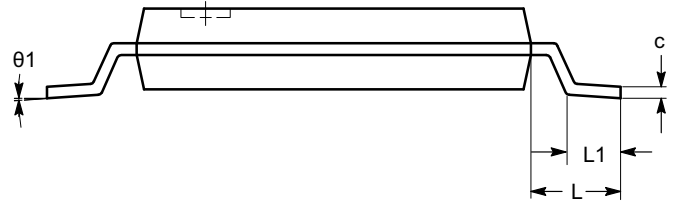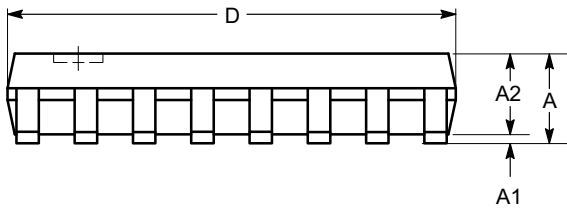


Notes:

- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Complies with JEDEC MO-153.

PCS1P2858A

Table 7. ORDERING INFORMATION

Part Number	Marking	Package Type	Temperature
PCS1P2858AG-16TR	3P2858AG	16-Pin TSSOP, TAPE & REEL, Green	Commercial
PCS1P2858AG-16TT	3P2858AG	16-Pin TSSOP, TUBE, Green	Commercial

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5773-3850

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative