
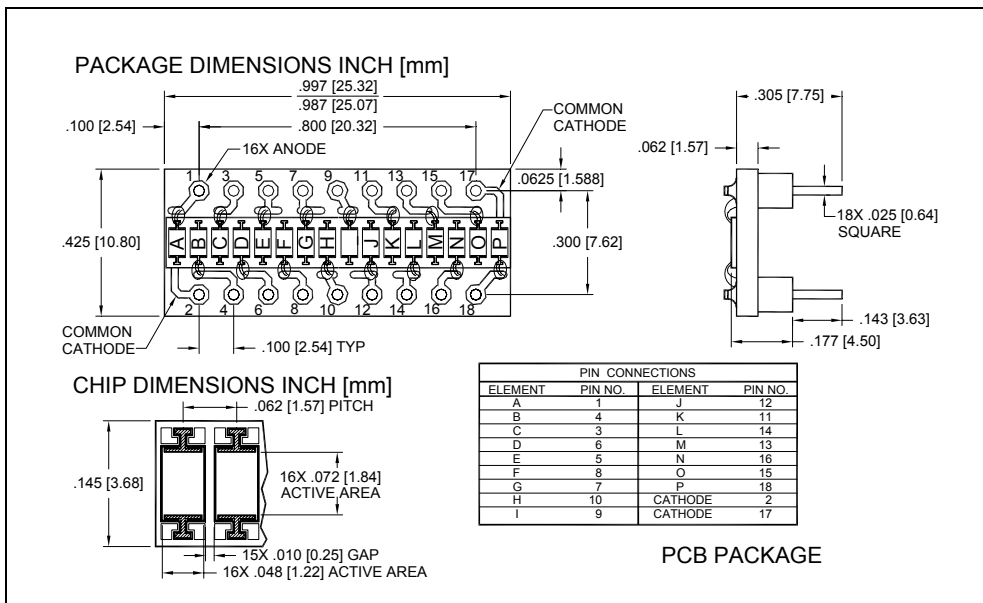


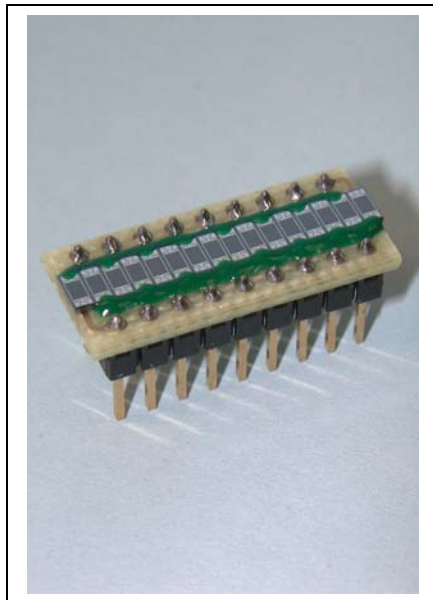

FEATURES

- Stackable
- Blue enhanced
- Low cost

DESCRIPTION

The **PDB-C216** is a blue enhanced linear array 16 elements silicon photodiode designed to be stackable and packaged in a PCB with a terminal strip package.

APPLICATIONS


- Card reader
- Baggage scanners
- Characters recognition

ABSOLUTE MAXIMUM RATING (TA = 23°C UNLESS OTHERWISE NOTED)

SYMBOL	PARAMETER	MIN	MAX	UNITS
V _{BR}	Reverse Voltage		50	V
T _{STG}	Storage Temperature	-40	+100	°C
T _O	Operating Temperature	-20	+75	°C
T _S	Soldering Temperature*		+240	°C

* 1/16 inch from case for 3 seconds max.

SPECTRAL RESPONSE

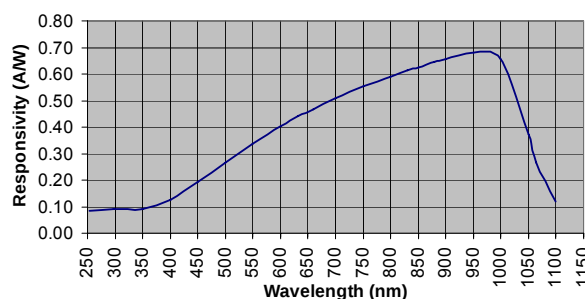

ELECTRO-OPTICAL CHARACTERISTICS RATING (TA = 23°C UNLESS OTHERWISE NOTED)

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I _{SC}	Short Circuit Current	H = 100 fc, 2850 K	18	28		μA
I _D	Dark Current	V _R = 5V		5	50	nA
R _{SH}	Shunt Resistance	V _R = 10 mV	100	200		MΩ
C _J	Junction Capacitance	V _R = 10 V, f = 1 MHz		40	60	pF
λ _{range}	Spectral Application Range	Spot Scan	350		1100	nm
V _{BR}	Breakdown Voltage	I = 10 μA	15	30		V
NEP	Noise Equivalent Power	V _R = 0V @ λ = Peak		2x10 ⁻¹⁴		W/√Hz
t _r	Response Time**	RL = 50 Ω, V _R = 0 V		190		nS
		RL = 50 Ω, V _R = 10 V		13		nS

**Response time of 10% to 90% is specified at 660nm wavelength light.

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.