

IGBT Module-Dual



600A, 600V

PDMB600E6


PDMB600E6C

□ 回路図 : CIRCUIT

□ 外形寸法図 : OUTLINE DRAWING

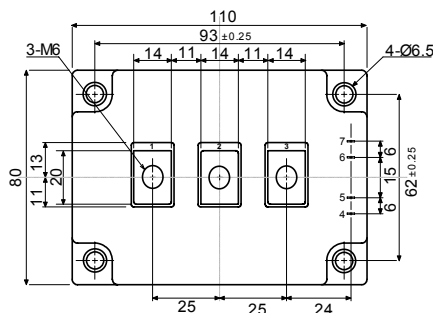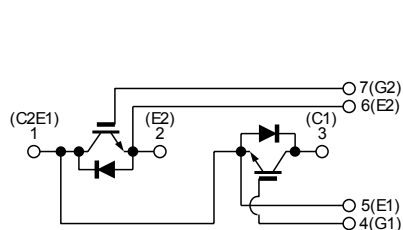

PDMB600E6

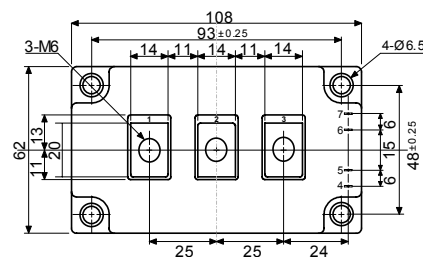

PDMB600E6C

Dimension: [mm]

□ 最大定格 : MAXIMUM RATINGS (T_c = 25°C)

Item	Symbol	Rated Value	Unit
コレクタ・エミッタ間電圧 Collector-Emitter Voltage	V _{CEs}	600	V
ゲート・エミッタ間電圧 Gate-Emitter Voltage	V _{GES}	±20	V
コレクタ電流 Collector Current	DC	I _C	A
	1ms	I _{CP}	
コレクタ損失 Collector Power Dissipation	P _C	2,080	W
接合温度 Junction Temperature Range	T _j	-40~+150	°C
保存温度 Storage Temperature Range	T _{stg}	-40~+125	°C
絶縁耐圧(Terminal to Base AC, 1 minute) Isolation Voltage	V _{ISO}	2,500	V (RMS)
締め付けトルク Mounting Torque	F _{tor}	3 (30.6)	N・m (kgf・cm)

□ 電気的特性 : ELECTRICAL CHARACTERISTICS (T_c = 25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
コレクタ遮断電流 Collector-Emitter Cut-Off Current	I _{CEs}	V _{CE} = 600V, V _{GE} = 0V	—	—	1.0	mA
ゲート漏れ電流 Gate-Emitter Leakage Current	I _{GES}	V _{GE} = ±20V, V _{CE} = 0V	—	—	1.0	μA
コレクタ・エミッタ間飽和電圧 Collector-Emitter Saturation Voltage	V _{CE(sat)}	I _C = 600A, V _{GE} = 15V	—	2.1	2.6	V
ゲートしきい値電圧 Gate-Emitter Threshold Voltage	V _{GE(th)}	V _{CE} = 5V, I _C = 600mA	4.0	—	8.0	V
入力容量 Input Capacitance	C _{ies}	V _{CE} = 10V, V _{GE} = 0V, f = 1MHz	—	30,000	—	pF
スイッチング時間 Switching Time	上昇時間 Rise Time	V _{CC} = 300V R _L = 0.5Ω R _G = 2.0Ω V _{GE} = ±15V	—	0.15	0.35	μs
	ターンオン時間 Turn-on Time		—	0.30	0.85	
	下降時間 Fall Time		—	0.10	0.25	
	ターンオフ時間 Turn-off Time		—	0.40	0.80	

□ フリーホイーリングダイオードの特性 : FREE WHEELING DIODE RATINGS & CHARACTERISTICS (T_c = 25°C)

Item	Symbol	Rated Value	Unit
順電流 Forward Current	DC	I _F	A
	1ms	I _{FM}	

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
順電圧 Peak Forward Voltage	V _F	I _F = 600A, V _{GE} = 0V	—	1.9	2.4	V
逆回復時間 Reverse Recovery Time	t _{rr}	I _F = 600A, V _{GE} = -10V di/dt = 1200A/μs	—	0.15	0.25	μs

□ 熱的特性 : THERMAL CHARACTERISTICS

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
熱抵抗 Thermal Impedance	IGBT	Junction to Case (T _c 測定点チップ直下)	—	—	0.06	°C/W
	Diode		—	—	0.14	

PDMB600E6

PDMB600E6C

Fig.1- Output Characteristics (Typical)

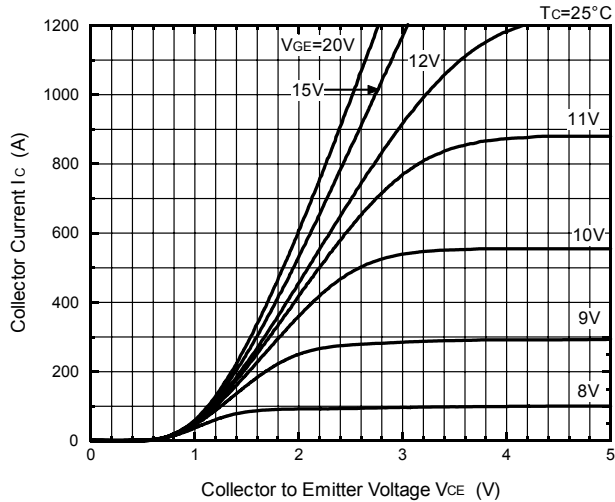


Fig.2- Output Characteristics (Typical)

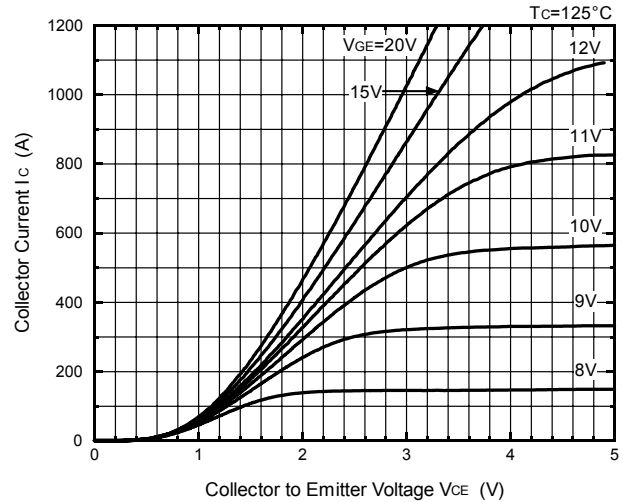


Fig.3- Collector to Emitter On Voltage vs. Gate to Emitter Voltage (Typical)

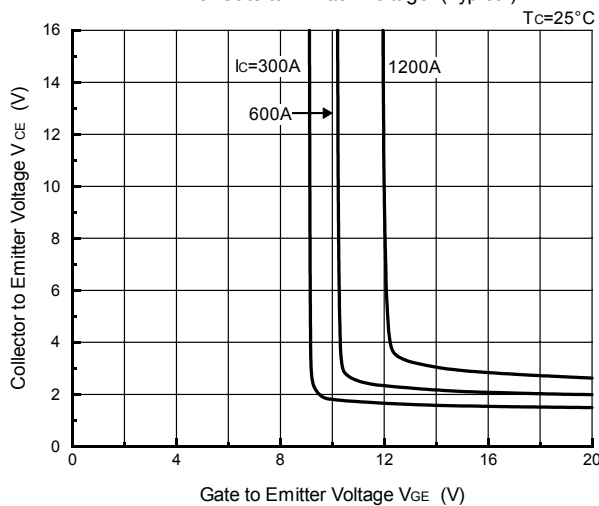


Fig.4- Collector to Emitter On Voltage vs. Gate to Emitter Voltage (Typical)

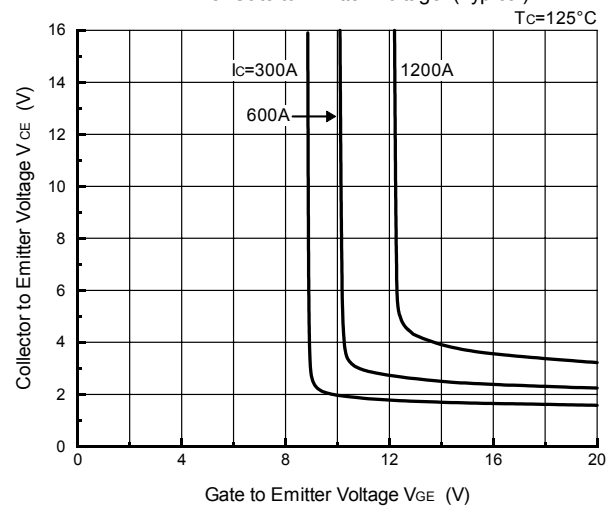


Fig.5- Gate Charge vs. Collector to Emitter Voltage (Typical)


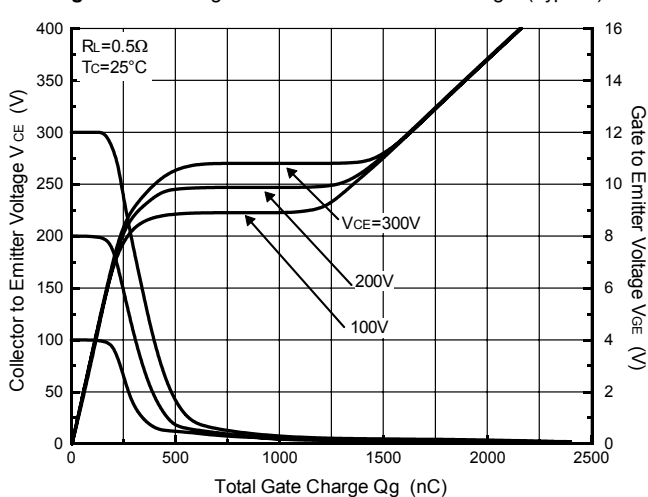


Fig.6- Capacitance vs. Collector to Emitter Voltage (Typical)

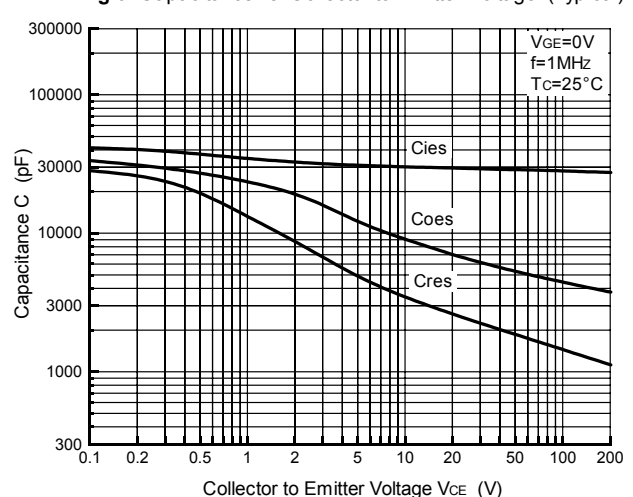

PDMB600E6

PDMB600E6C

Fig.7- Collector Current vs. Switching Time (Typical)

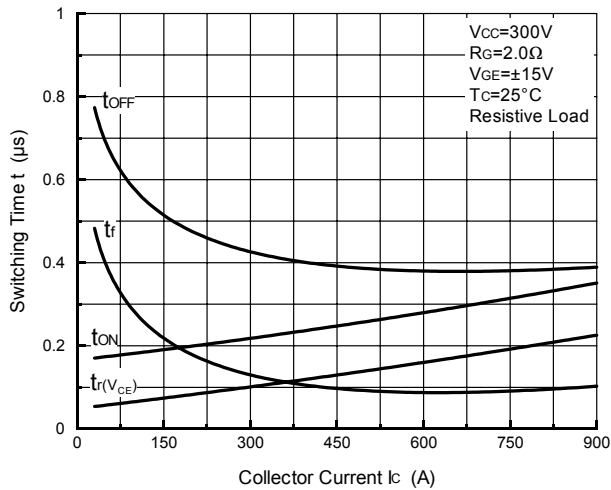


Fig.8- Series Gate Impedance vs. Switching Time (Typical)

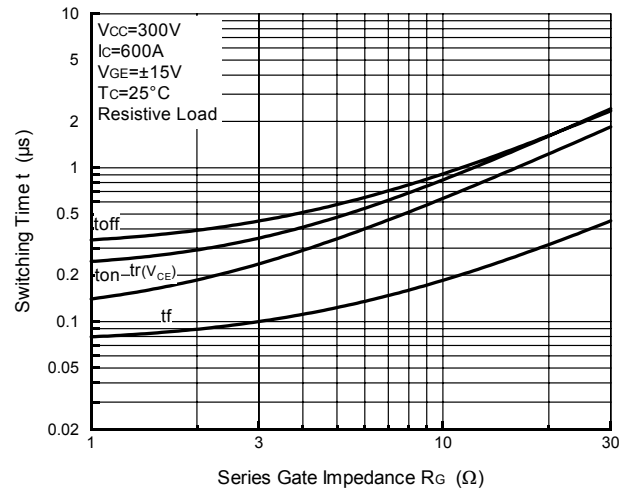


Fig.9- Collector Current vs. Switching Time

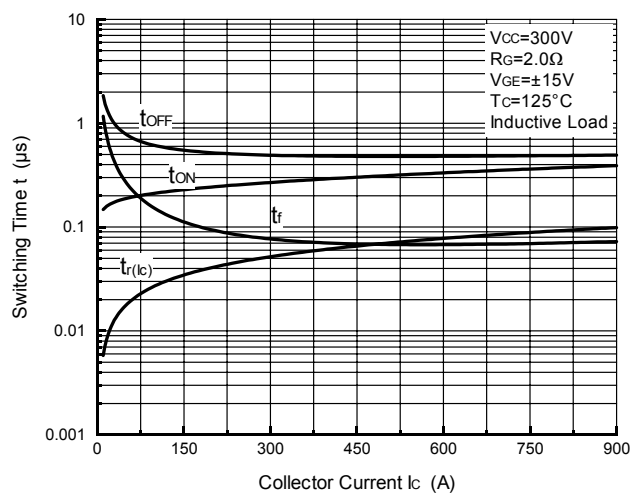


Fig.10- Series Gate Impedance vs. Switching Time

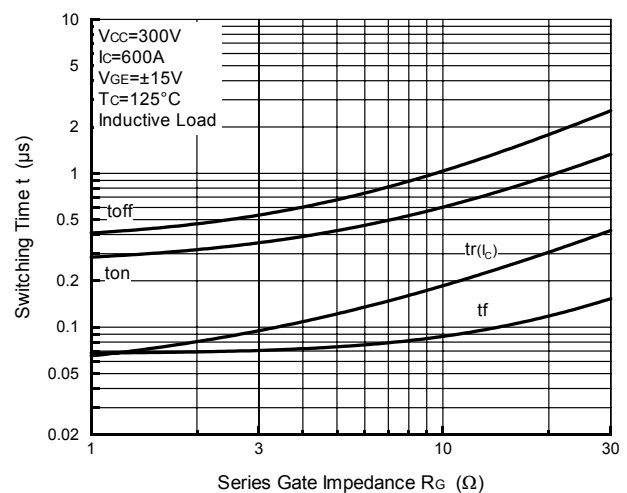


Fig.11- Collector Current vs. Switching Loss





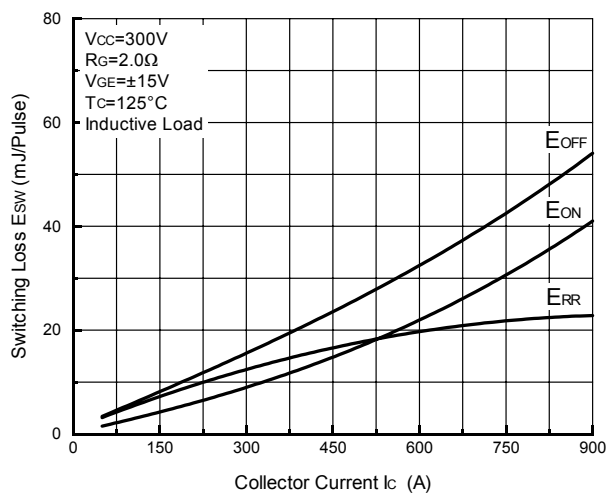


Fig.12- Series Gate Impedance vs. Switching Loss

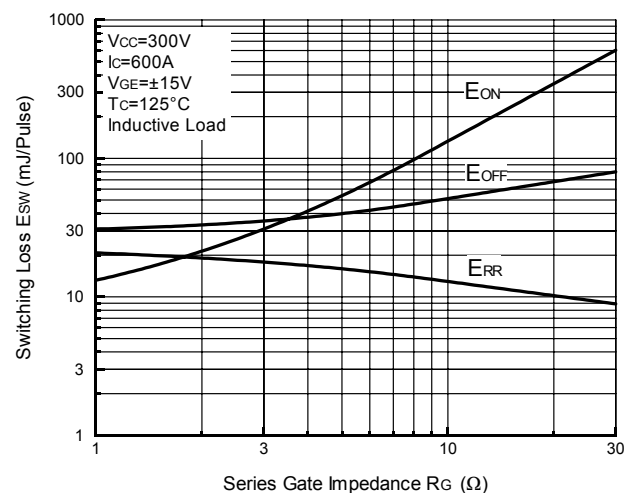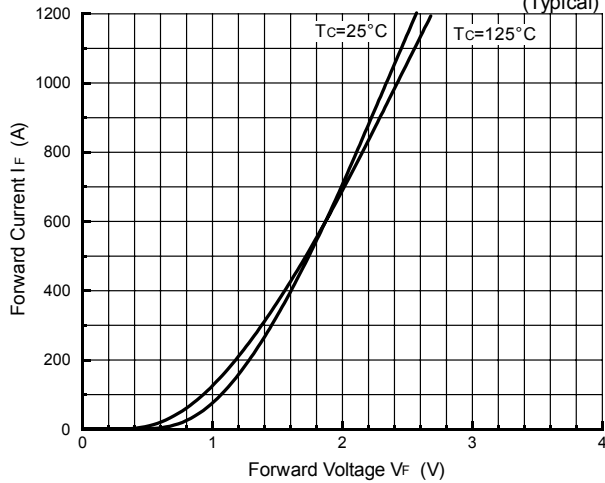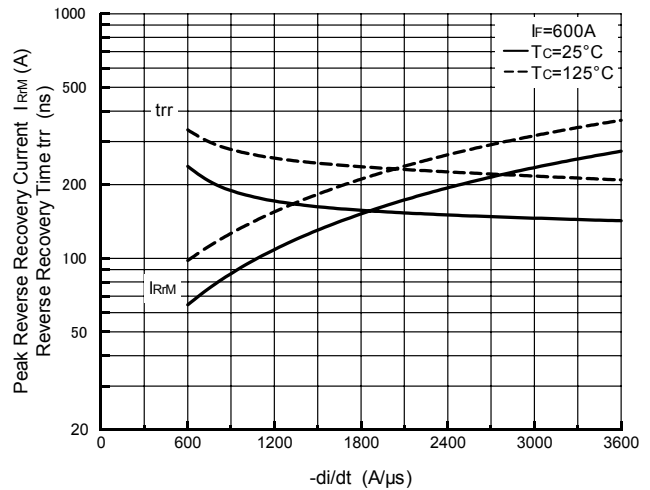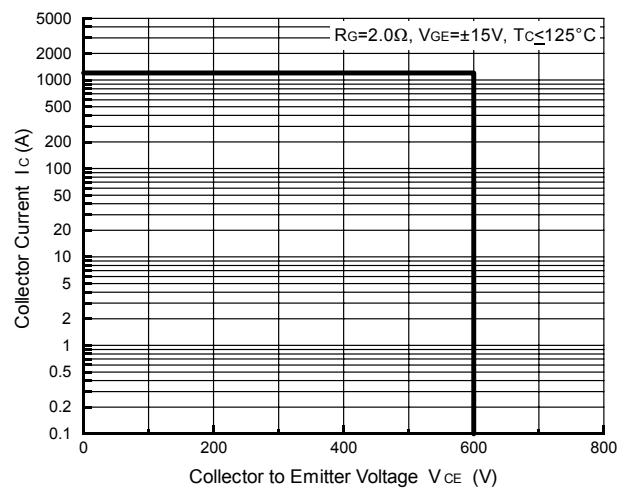

PDMB600E6

PDMB600E6C

Fig.13- Forward Characteristics of Free Wheeling Diode (Typical)**Fig.14- Reverse Recovery Characteristics (Typical)****Fig.15- Reverse Bias Safe Operating Area****Fig.16- Transient Thermal Impedance**