




1. Mechanical Dimensions:

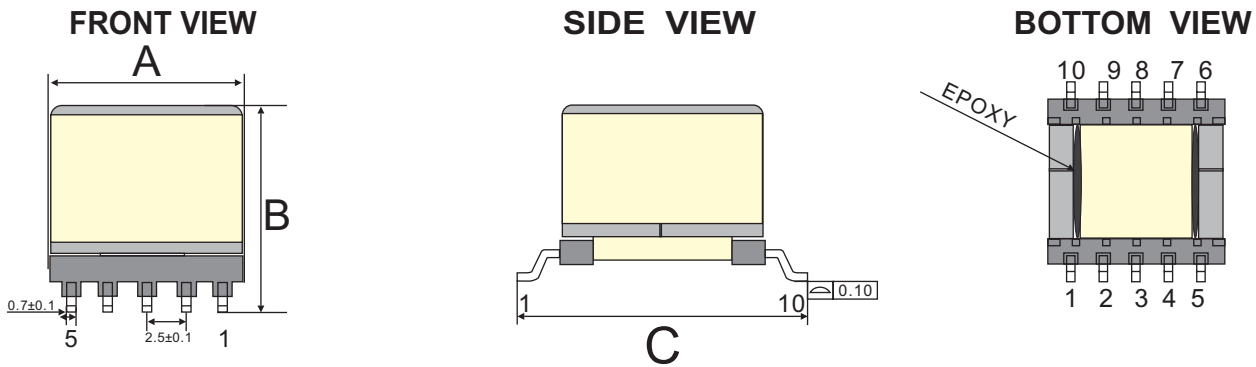


2. Schematic:

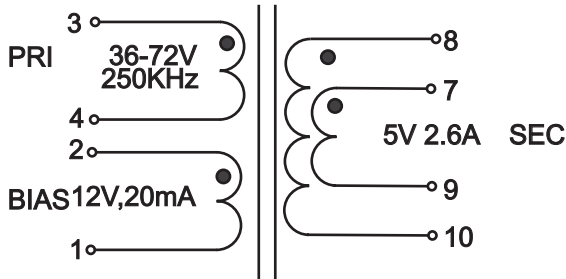

Print information



Suggested PCB Paad Layout



Unit: mm

A MAX	B MAX	C MAX
14.0	12.7	17.5

3. Electrical Characteristics :

Specifications: at 25 degree C. Operating Temperature -40 to +85°C

NO.	ITEM	TEST CONDITION	SPECIFICATION
1	Inductance	(3-4))@200kHz, 0.1v	127uH+/-10%
2	Leakage Inductance	(3-4) with shorted other@200kHz, 0.1v	0.8uH MAX
3	DCR	(3-4) @ 25°C	222 mΩ Max
4		(7,8-9,10) @ 25°C	39mΩ Max
5		(1-2) @ 25°C	348 mΩ Max
6	HI-POT	PRI TO SEC	1500Vac 1mA 3Sec.
7	T/R	(3-4):(7,8-9,10):(2-1)	1:0.25:0.5+/-2%