




		PFCL25-48											
Type Of Winding		Unipolar						Bipolar					
Steps Per Revolution		48											
Thread Pitch	mm	0.48	0.96	1.2	0.48	0.96	1.2	0.48	0.96	1.2	0.48	0.96	1.2
Travel/Step	mm	0.01	0.02	0.025	0.01	0.02	0.025	0.01	0.02	0.025	0.01	0.02	0.025
Effective Stroke	mm	30 or 60											
Force @ 200 pps	N	22	17.5	15	22	17.5	15	31	22.5	20.5	31	22.5	20.5
Rated Voltage	V	12			5			12			5		
Rated Current	A/Ø	0.10			0.31			0.10			0.33		
Resistance	ohm/Ø	120 ±7%			16 ±7%			122 ±7%			15 ±7%		
Inductance	mH/Ø	32			4.4			71			8.5		
Operating Temp. Range	°C	-10 to +50											
Temperature Rise	°K	70											
Weight	g	60											

Bipolar Constant Voltage 48x4 Torque Curve

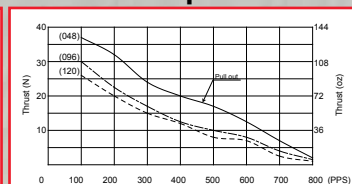

16