



G POWER™



PFU6N70FG

FEATURES

- Originative New Design
- 100% EAS Test
- Rugged Gate Oxide Technology
- Extremely Low Intrinsic Capacitances
- Remarkable Switching Characteristics
- Unequalled Gate Charge : 13.2 nC (Typ.)
- Extended Safe Operating Area
- Lower $R_{DS(on)}$: 2.0 Ω (Typ.) @ $V_{GS}=10V$
- Halogen Free

APPLICATION


- Low power battery chargers
- Switch mode power supply (SMPS)
- AC adaptors

PFU6N70FG 700V N-Channel MOSFET

$BV_{DSS} = 700\text{ V}$

$R_{DS(on)} = 2.0\text{ }\Omega$

$I_D = 4.0\text{ A}$



I-PAK(TO-251)



1.Gate 2. Drain 3. Source

Absolute Maximum Ratings $T_c=25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Value	Units
V_{DSS}	Drain-Source Voltage	700	V
I_D	Drain Current – Continuous ($T_c = 25^\circ\text{C}$)	4.0	A
	Drain Current – Continuous ($T_c = 100^\circ\text{C}$)	2.5	A
I_{DM}	Drain Current – Pulsed (Note 1)	16	A
V_{GS}	Gate-Source Voltage	± 30	V
E_{AS}	Single Pulsed Avalanche Energy (Note 2)	240	mJ
I_{AR}	Avalanche Current (Note 1)	4.0	A
E_{AR}	Repetitive Avalanche Energy (Note 1)	8.3	mJ
dv/dt	Peak Diode Recovery dv/dt (Note 3)	4.5	V/ns
P_D	Total Power Dissipation ($TA=25^\circ\text{C}$) *	2.5	W
	Power Dissipation ($T_c = 25^\circ\text{C}$) - Derate above 25°C	83	W
		0.66	W/ $^\circ\text{C}$
T_J, T_{STG}	Operating and Storage Temperature Range	-55 to +150	$^\circ\text{C}$
T_L	Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	300	$^\circ\text{C}$

Thermal Resistance Characteristics

Symbol	Parameter	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case	--	1.51	$^\circ\text{C}/\text{W}$
$R_{\theta JA}$	Junction-to-Ambient*	--	62	
$R_{\theta JA}$	Junction-to-Ambient	--	110	

* When mounted on the minimum pad size recommended (PCB Mount)

Electrical Characteristics $T_c=25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
--------	-----------	-----------------	-----	-----	-----	-------

On Characteristics

$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}$, $I_D = 250 \mu\text{A}$	2.0	--	4.0	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS} = 10 \text{ V}$, $I_D = 2.5 \text{ A}$	--	2.0	2.4	Ω

Off Characteristics

BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0 \text{ V}$, $I_D = 250 \mu\text{A}$	700	--	--	V
$\Delta BV_{DSS} / \Delta T_J$	Breakdown Voltage Temperature Coefficient	$I_D = 250 \mu\text{A}$, Referenced to 25°C	--	1.0	--	$\text{V}/^\circ\text{C}$
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 700 \text{ V}$, $V_{GS} = 0 \text{ V}$	--	--	10	μA
		$V_{DS} = 560 \text{ V}$, $T_c = 125^\circ\text{C}$	--	--	100	μA
I_{GSSF}	Gate-Body Leakage Current, Forward	$V_{GS} = 30 \text{ V}$, $V_{DS} = 0 \text{ V}$	--	--	100	μA
I_{GSSR}	Gate-Body Leakage Current, Reverse	$V_{GS} = -30 \text{ V}$, $V_{DS} = 0 \text{ V}$	--	--	-100	μA

Dynamic Characteristics

C_{iss}	Input Capacitance	$V_{DS} = 25 \text{ V}$, $V_{GS} = 0 \text{ V}$, $f = 1.0 \text{ MHz}$	--	760	990	pF
C_{oss}	Output Capacitance		--	70	90	pF
C_{rss}	Reverse Transfer Capacitance		--	6	8	pF

Switching Characteristics

$t_{d(on)}$	Turn-On Time	$V_{DS} = 350 \text{ V}$, $I_D = 2.5 \text{ A}$, $R_G = 25 \Omega$, $R_L = 70 \Omega$ (Note 4,5)	--	17	34	ns
t_r	Turn-On Rise Time		--	17	34	ns
$t_{d(off)}$	Turn-Off Delay Time		--	31	62	ns
t_f	Turn-Off Fall Time		--	16	32	ns
Q_g	Total Gate Charge	$V_{DS} = 560 \text{ V}$, $I_D = 5.0 \text{ A}$, $V_{GS} = 10 \text{ V}$ (Note 4,5)	--	13.2	20	nC
Q_{gs}	Gate-Source Charge		--	4	--	nC
Q_{gd}	Gate-Drain Charge		--	4	--	nC

Source-Drain Diode Maximum Ratings and Characteristics

I_S	Continuous Source-Drain Diode Forward Current	--	--	4.0	A	
I_{SM}	Pulsed Source-Drain Diode Forward Current	--	--	16		
V_{SD}	Source-Drain Diode Forward Voltage	$I_S = 5.0 \text{ A}$, $V_{GS} = 0 \text{ V}$	--	--	1.5	V
trr	Reverse Recovery Time	$I_S = 5.0 \text{ A}$, $V_{GS} = 0 \text{ V}$ $di_F/dt = 100 \text{ A/us}$ (Note 4)	--	300	--	ns
Qrr	Reverse Recovery Charge		--	2.5	--	uC

Notes ;

1. Repetitive Rating : Pulse width limited by maximum junction temperature
2. $I_{AS}=5.0\text{A}$, $V_{DD}=50\text{V}$, $R_G=25\Omega$, Starting $T_J=25^\circ\text{C}$
3. $I_{SD}\leq 5.0\text{A}$, $di/dt\leq 300\text{A}/\mu\text{s}$, $V_{DD}\leq BV_{DSS}$, Starting $T_J=25^\circ\text{C}$
4. Pulse Test : Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$
5. Essentially Independent of Operating Temperature

Typical Characteristics

Figure 1. On Region Characteristics

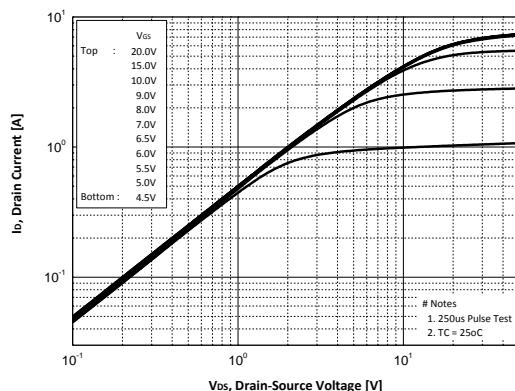


Figure 2. Transfer Characteristics

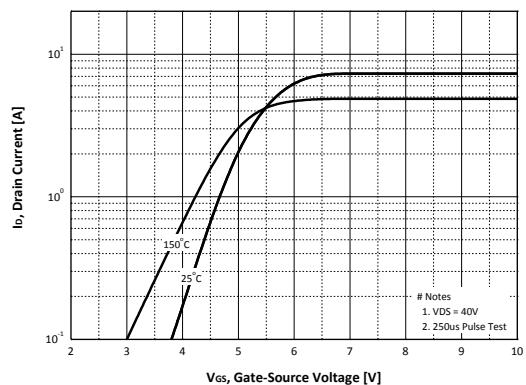


Figure 3. Static Drain-Source On Resistance

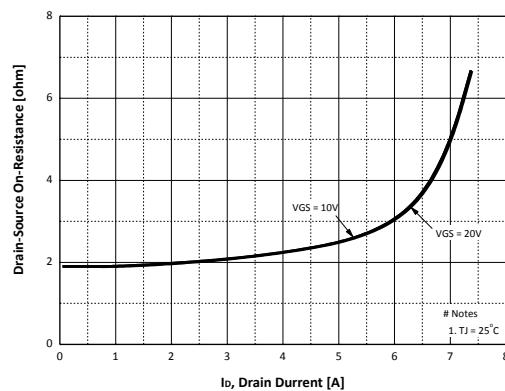


Figure 4. Body Diode Forward Voltage

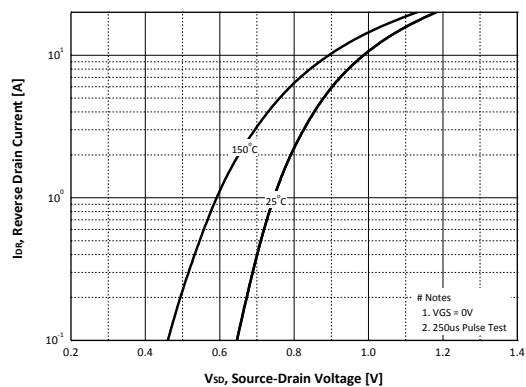


Figure 5. Capacitance Characteristics


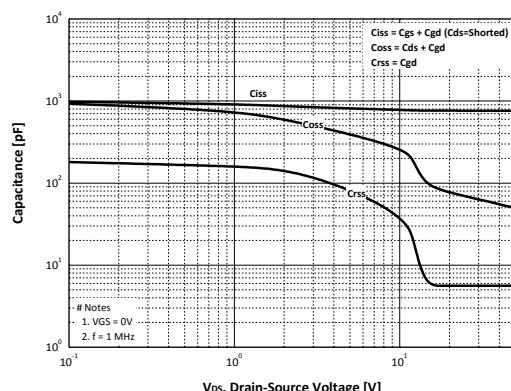


Figure 6. Gate Charge Characteristics

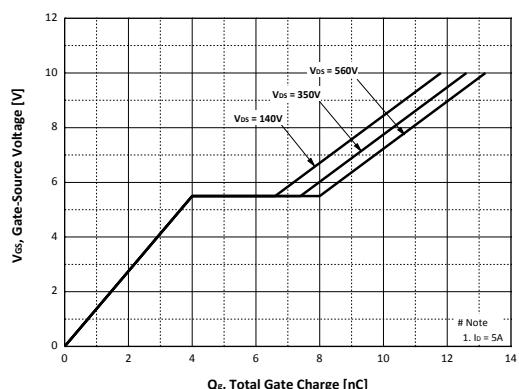

Typical Characteristics

Figure 7. Breakdown Voltage Variation vs. Temperature

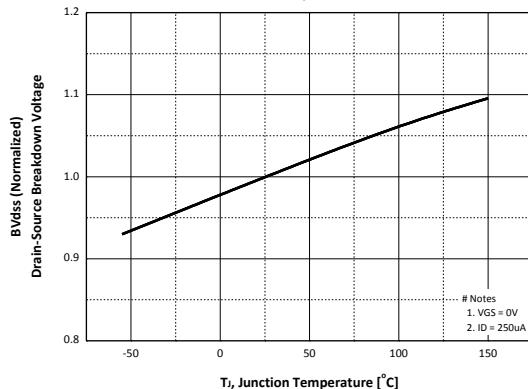


Figure 8. On-Resistance Variation vs. Temperature

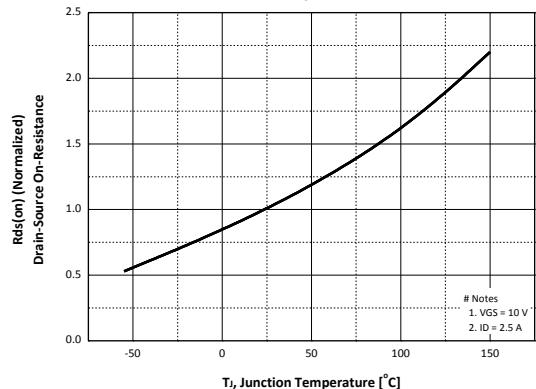


Figure 9. Safe Operation Area

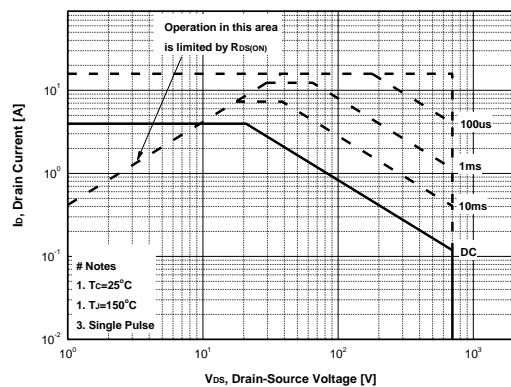


Figure 10. Maximum Drain Current vs. Case Temperature


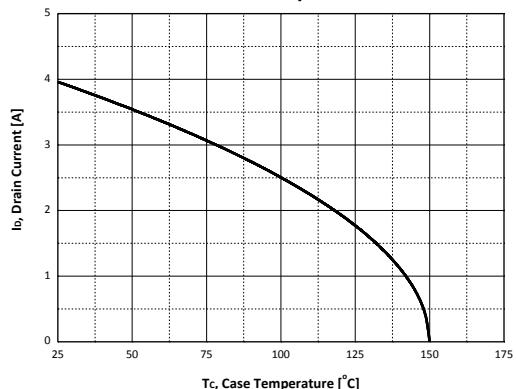


Figure 11. Transient Thermal Response Curve

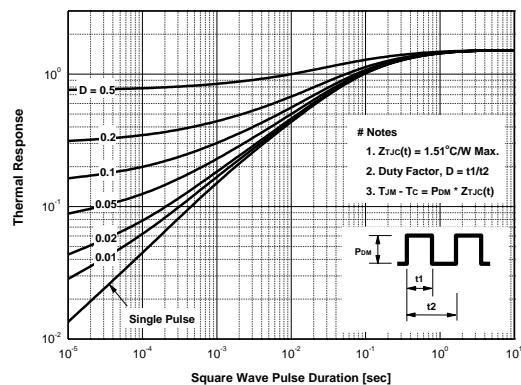

Characteristics Test Circuit & Waveform

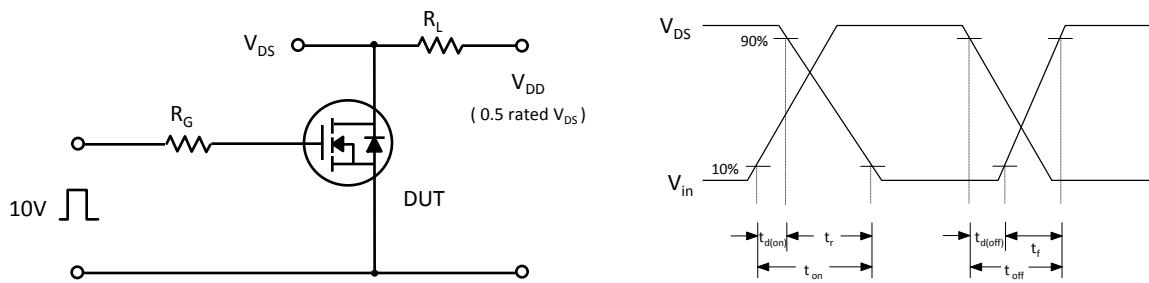


Fig 14. Resistive Switching Test Circuit & Waveforms

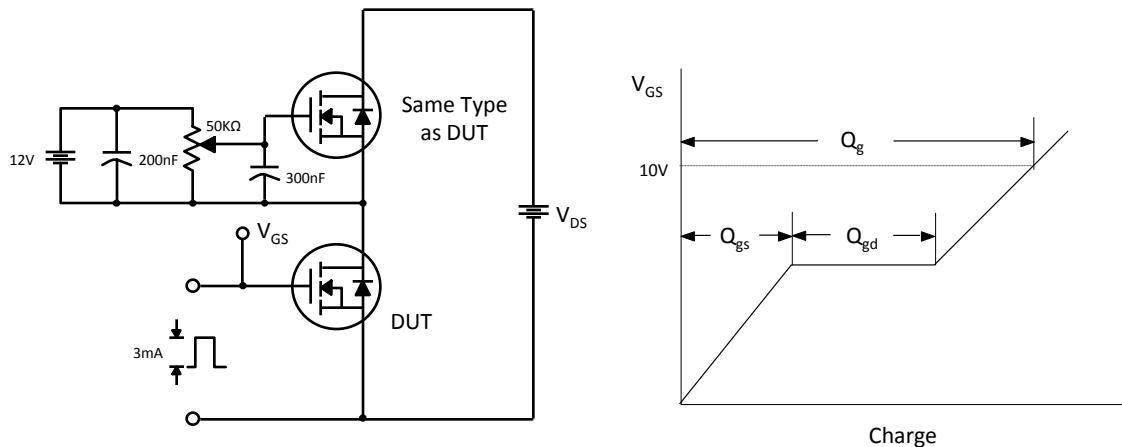


Fig 15. Gate Charge Test Circuit & Waveform

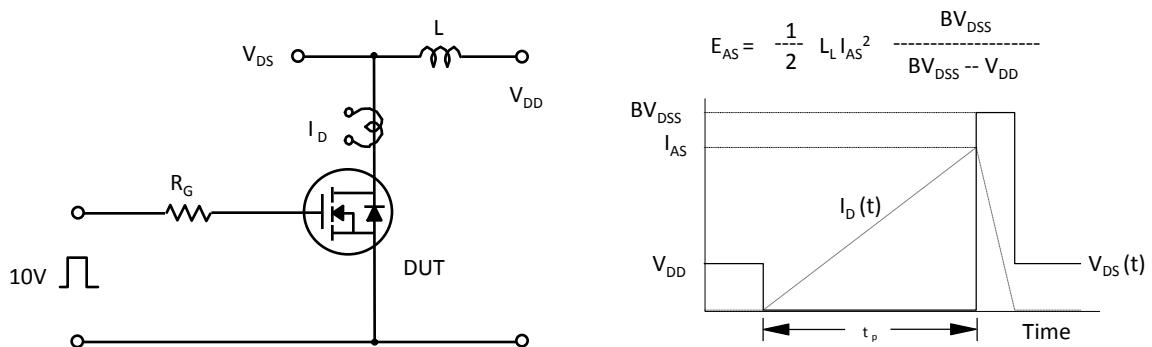


Fig 16. Unclamped Inductive Switching Test Circuit & Waveforms

Characteristics Test Circuit & Waveform (continued)

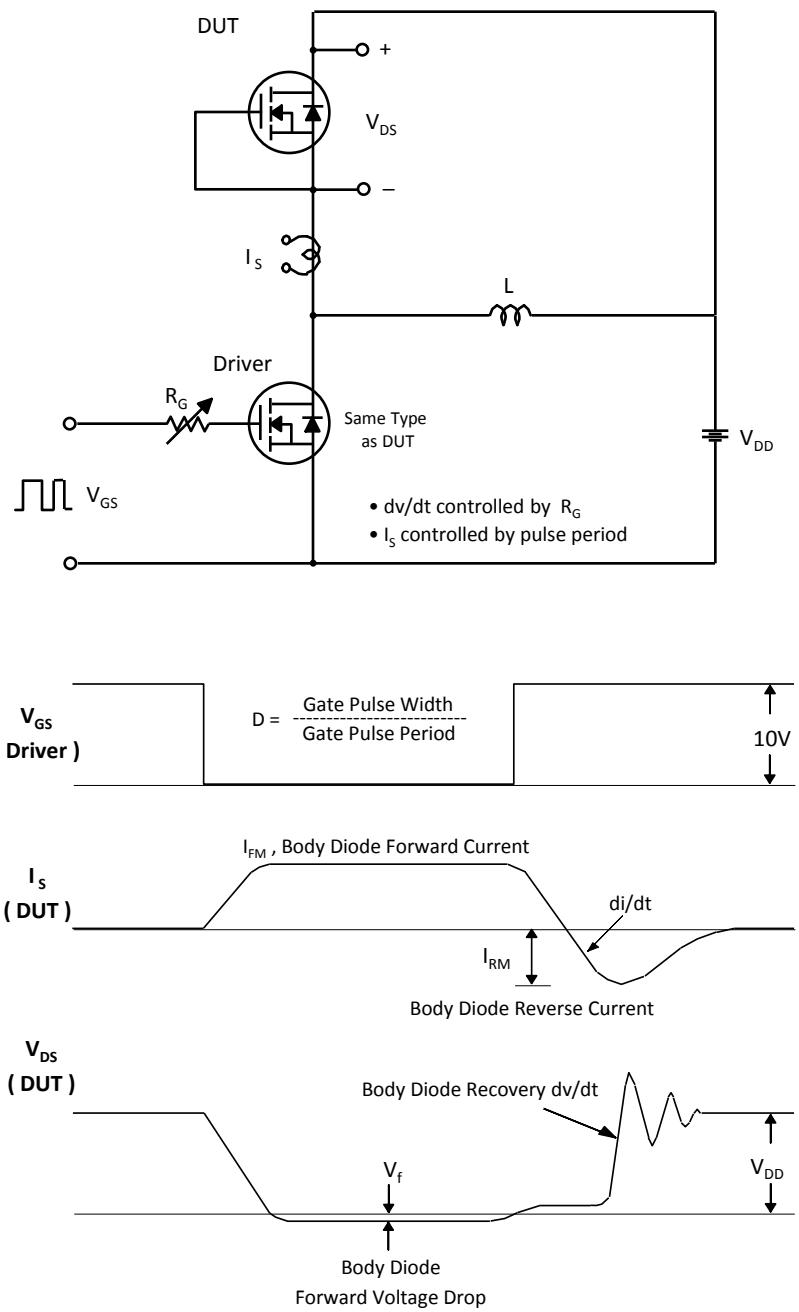


Fig 17. Peak Diode Recovery dv/dt Test Circuit & Waveforms

Package Dimension

I-PAK(TO-251)

