


Protection in Portable Electronics Applications.

FEATURES


- Transient protection for data lines to IEC 61000-4-2(ESD) 15kV(Air), 8kV(Contact)
- Small package for use in portable electronics.
- Suitable replacement for Multi-Layer Varistors in ESD protection applications.
- Protects one I/O or power line.
- Low clamping voltage.
- Low leakage current.

APPLICATIONS

- Cell phone handsets and accessories.
- Microprocessor based equipment.
- Personal digital assistants (PDA s)
- Notebooks, desktops, & servers.
- Portable instrumentation.
- Pagers peripherals.

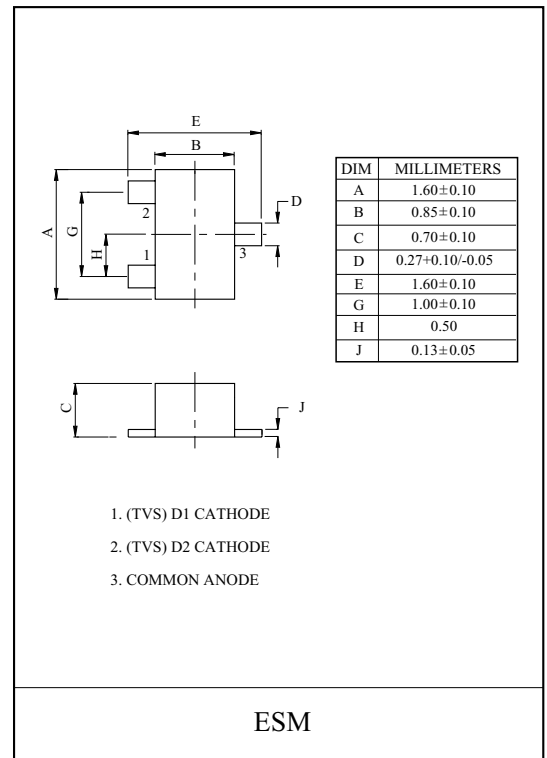

Marking

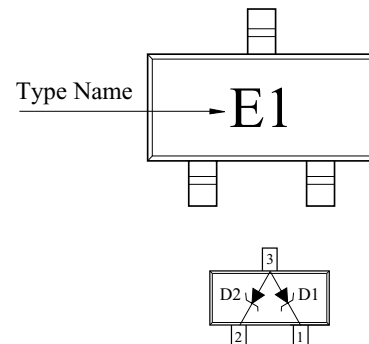


MAXIMUM RATING (Ta=25 °C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Peak Pulse Power (tp=8/20 μs)	P _{PK}	60	W
Peak Pulse Current (tp=8/20 μs)	I _{PP}	5	A
Junction Temperature	T _j	150	
Storage Temperature	T _{stg}	-55 150	


ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Stand-Off Voltage	V _{RWM}	-	-	-	3	V
Reverse Breakdown Voltage	V _{BR}	I _t =5mA	5.32	-	5.88	V
Reverse Leakage Current	I _R	V _{RWM} =3V	-	-	5.0	μA
Clamping Voltage	V _{C(1)}	I _{PP} =1A, tp=8/20 μs	-	-	10	V
	V _{C(2)}	I _{PP} =5A, tp=8/20 μs	-	-	15	V
Junction Capacitance	C _J	V _R =0V, f=1MHz	-	35	45	pF


NON-REPETITIVE PEAK PULSE
POWER VS. PULSE TIME

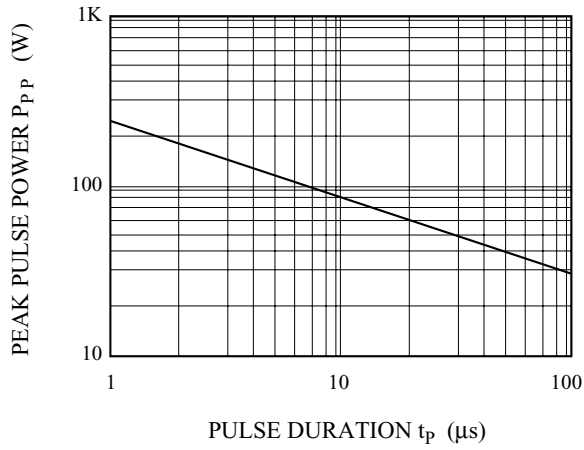

POWER DERATION CURVE

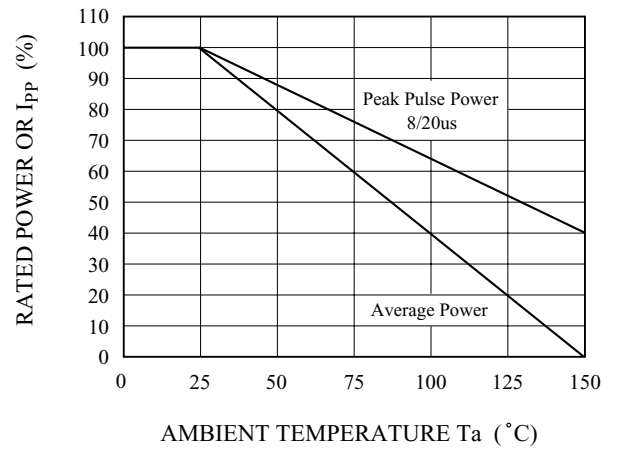

PULSE WAVEFORM

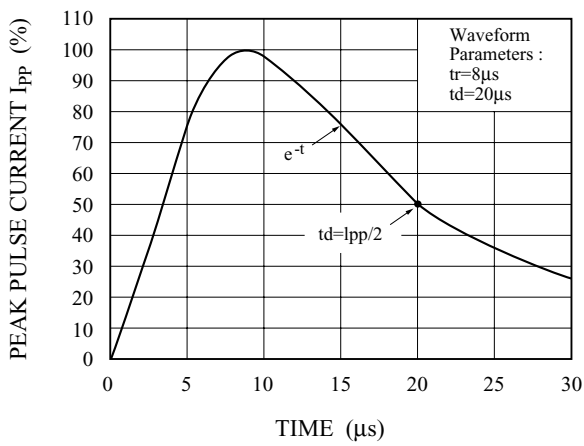

$C_J - V_R$

