


Protection in Portable Electronics Applications.

FEATURES

- Transient protection for data lines to
IEC61000-4-2(ESD) : $\pm 8\text{kV}$ (contact), $\pm 15\text{kV}$ (Air)
IEC61000-4-4(EFT) : $2.5\text{kV}/50\text{A}$
IEC61000-4-5(Surge) 4A ($t_p=8/20\text{us}$)
- Small package for use in portable electronics.
- Suitable replacement for Multi-Layer Varistors in ESD protection applications.
(* Multi-Layer Varistors [0402 Size])
- Protects on I/O or power line.
- Low clamping voltage.
- Low leakage current.
- Non Suffix : ULP-2 Package ex) PG05TBUL2-RTL/H
- Suffix U : ULP-2 Package&Qualified to AEC-Q101 ex) PG05TBUL2-RTL/HU
- Suffix R : ULP-2(4) Package ex) PG05TBUL2-RTL/HR
- Suffix UR : ULP-2(4) Package&Qualified to AEC-Q101 ex) PG05TBUL2-RTL/HUR
- Suffix P : ULP-2(5) Package ex) PG05TBUL2-RTL/HP
- Suffix UP : ULP-2(5) Package&Qualified to AEC-Q101 ex) PG05TBUL2-RTL/HUP



ULP-2 (leadless-type)



1. ANODE 2. ANODE

APPLICATIONS

- USB 2.0, 10/100/1000 Ethernet, FireWire, DVI, HDMI, S-ATA
- Mobile Communication
- Consumer Products (STB, MP3, DVD, DSC...)
- LCD-Display, Camera
- Notebooks and desktop computers, peripherals

Pin configurations (Bi-directional)

PRODUCT DESCRIPTION

- Molding compound flammability rating : UL 94V-0
- Pb-Free, Halogen-Free, RoHs Compliant

Package dimensions (ULP-2)	Package dimensions (ULP-2(4))	Package dimensions (ULP-2(5))																																																				
<table><tr><th>DIM</th><th>MILLIMETERS</th></tr><tr><td>A</td><td>1.0±0.05</td></tr><tr><td>B</td><td>0.6±0.05</td></tr><tr><td>C</td><td>0.4±0.05</td></tr><tr><td>C1</td><td>0.38^{+0.02}_{-0.03}</td></tr><tr><td>D</td><td>0.5±0.03</td></tr><tr><td>E</td><td>0.25±0.03</td></tr><tr><td>G</td><td>0.65±0.03</td></tr><tr><td>H</td><td>0.05</td></tr><tr><td>I</td><td>Max 0.05</td></tr></table>	DIM	MILLIMETERS	A	1.0±0.05	B	0.6±0.05	C	0.4±0.05	C1	0.38 ^{+0.02} _{-0.03}	D	0.5±0.03	E	0.25±0.03	G	0.65±0.03	H	0.05	I	Max 0.05	<table><tr><th>DIM</th><th>MILLIMETERS</th></tr><tr><td>A</td><td>1.00±0.10</td></tr><tr><td>B</td><td>0.60±0.10</td></tr><tr><td>C</td><td>0.40±0.05</td></tr><tr><td>D</td><td>0.50±0.05</td></tr><tr><td>E</td><td>0.25±0.05</td></tr><tr><td>G</td><td>Typ. 0.65</td></tr><tr><td>H</td><td>0.05±0.05</td></tr></table>	DIM	MILLIMETERS	A	1.00±0.10	B	0.60±0.10	C	0.40±0.05	D	0.50±0.05	E	0.25±0.05	G	Typ. 0.65	H	0.05±0.05	<table><tr><th>DIM</th><th>MILLIMETERS</th></tr><tr><td>A</td><td>1.00±0.05</td></tr><tr><td>B</td><td>0.60±0.05</td></tr><tr><td>C</td><td>0.50±0.05</td></tr><tr><td>D</td><td>0.50±0.03</td></tr><tr><td>E</td><td>0.25±0.03</td></tr><tr><td>G</td><td>0.65 BSC</td></tr><tr><td>I</td><td>Max 0.03</td></tr></table>	DIM	MILLIMETERS	A	1.00±0.05	B	0.60±0.05	C	0.50±0.05	D	0.50±0.03	E	0.25±0.03	G	0.65 BSC	I	Max 0.03
DIM	MILLIMETERS																																																					
A	1.0±0.05																																																					
B	0.6±0.05																																																					
C	0.4±0.05																																																					
C1	0.38 ^{+0.02} _{-0.03}																																																					
D	0.5±0.03																																																					
E	0.25±0.03																																																					
G	0.65±0.03																																																					
H	0.05																																																					
I	Max 0.05																																																					
DIM	MILLIMETERS																																																					
A	1.00±0.10																																																					
B	0.60±0.10																																																					
C	0.40±0.05																																																					
D	0.50±0.05																																																					
E	0.25±0.05																																																					
G	Typ. 0.65																																																					
H	0.05±0.05																																																					
DIM	MILLIMETERS																																																					
A	1.00±0.05																																																					
B	0.60±0.05																																																					
C	0.50±0.05																																																					
D	0.50±0.03																																																					
E	0.25±0.03																																																					
G	0.65 BSC																																																					
I	Max 0.03																																																					

ORDERING INFORMATION

Part Number	Qty per Reel	Reel Size	Marking code
PG05TBUL2-RTL	10,000	7 inch	TK

PG05TBUL2

MAXIMUM RATING (Ta=25℃)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Peak Pulse Power (tp=8/20 us)	P _{PK}	100	W
Peak Pulse Current (tp=8/20 us)	I _{PP}	4	A
Junction Temperature	T _J	150	℃
Storage Temperature	T _{stg}	-55~150	℃

ELECTRICAL CHARACTERISTICS (Ta=25℃)


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Stand-Off Voltage	V _{RWM}	-	-	-	5	V
Reverse Breakdown Voltage	V _{BR}	I _t =1mA	7	-	-	V
Reverse Leakage Current	I _R	V _{RWM} =5.3V	-	-	1	uA
Clamping Voltage	V _C	I _{PP} =1A, tp=8/20us	-	13	-	V
		I _{PP} =4A, tp=8/20us	-	20	25	
Junction Capacitance	C _J	V _R =0V, f=1MHz	-	0.3	0.5	pF

PG05TBUL2

CLAMPING VOLTAGE

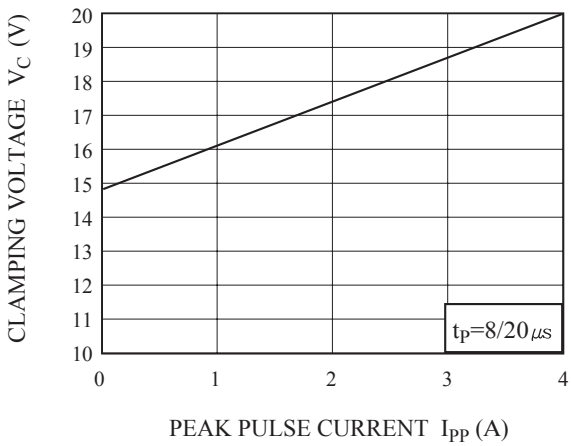

REVERSE CURRENT

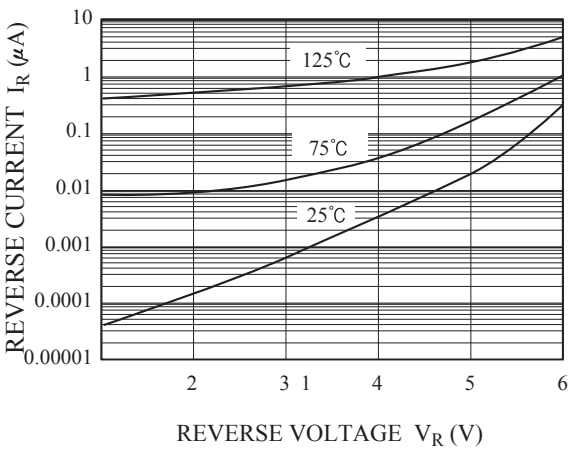

CAPACITANCE

