

PG124S15 (10A)

(1500V / 10A)

Fast recovery diode

Features

- Damper diode for high definition TV and high resolution display
- Insulated package by fully molding
- High voltage by mesa design
- High reliability

Applications

- High speed switching

Maximum ratings and characteristics

- Absolute maximum ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}		1500	V
Non-Repetitive peak reverse voltage	V_{RSM}		1500	V
Isolating voltage	V_{iso}	Terminals-to-Case, AC.1min	1500	V
Average output current	I_o	Square wave, duty=1/2 $T_c=95^{\circ}\text{C}$	10	A
Non-repetitive surge current	I_{FSM}	Sine wave 10ms, 1shot	100	A
Operating junction temperature	T_j		+150	$^{\circ}\text{C}$
Storage temperature	T_{stg}		-40 to +150	$^{\circ}\text{C}$

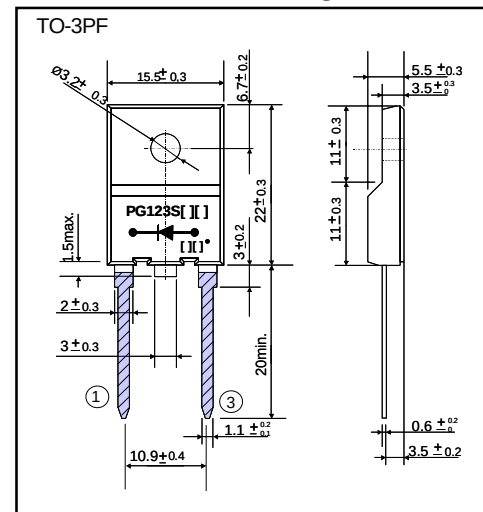
- Electrical characteristics ($T_c=25^{\circ}\text{C}$ Unless otherwise specified)

Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V_F	$I_F=4\text{A}$	2.0	V
Reverse current	I_R	$V_R=V_{RRM}$	50.0	μA
Reverse recovery time	t_{rr}	$I_F=I_R=0.1\text{A}, I_{rec}=0.025\text{A}$	0.5	μs


- Electrical characteristics ($T_c=25^{\circ}\text{C}$ Unless otherwise specified)







Item	Symbol	Condition	Max.	Unit
Thermal resistance	$R_{th(j-c)}$	Junction to case	2.5	$^{\circ}\text{C/W}$

Outline drawings, mm




Connection diagram

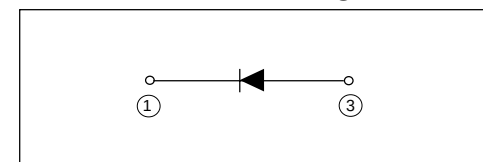

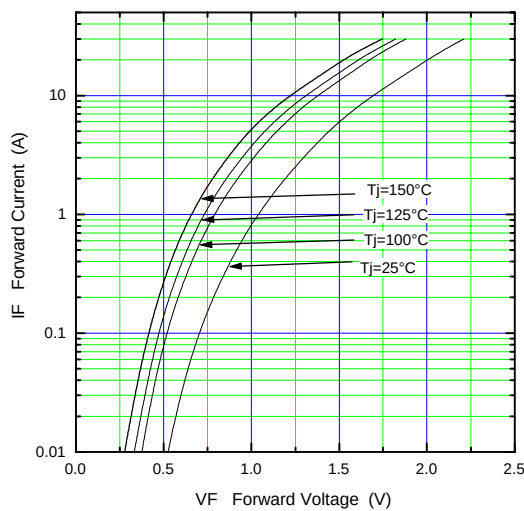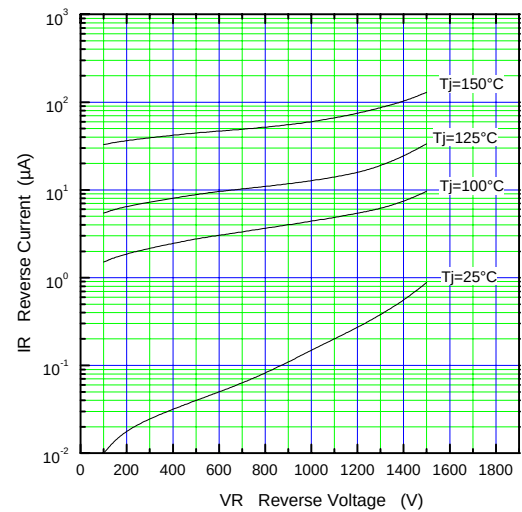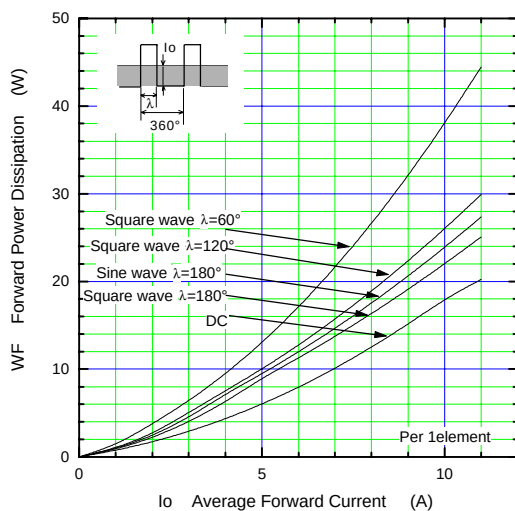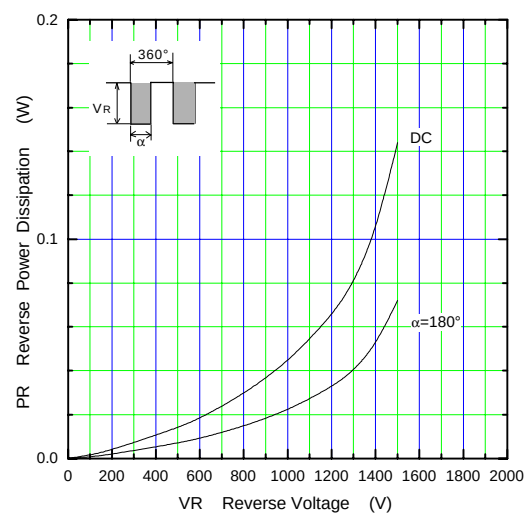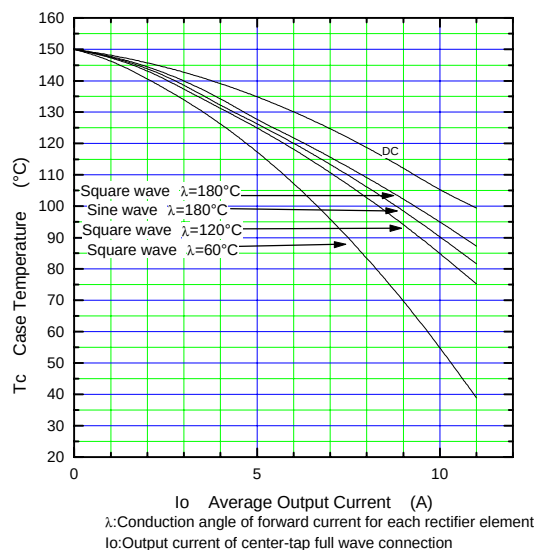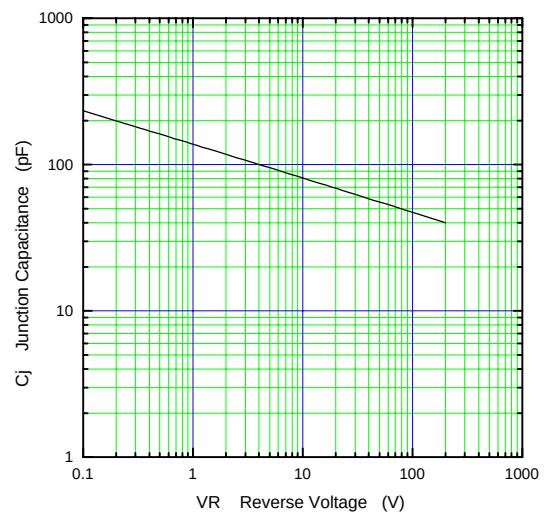■ Characteristics**Forward Characteristic (typ.)****Reverse Characteristic (typ.)****Forward Power Dissipation****Reverse Power Dissipation****Current Derating (I_o - T_c)****Junction Capacitance Characteristic (typ.)**

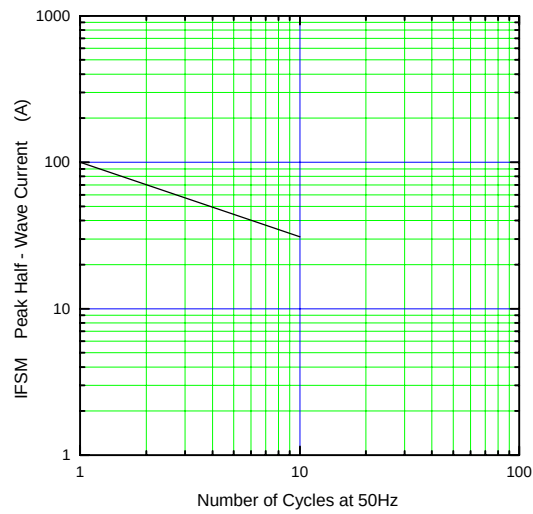Surge Capability



Transient Thermal Impedance

