



POWERTIP
Display Devices for Better System Design

液晶之友 电话: 020-33819057

<http://www.lcdfriends.com>


PO320240-H

- Available in STN, FSTN, FFSTN; with EL/LED backlight; with/out touch panel.

Application:

POS terminal
Handheld
Logistic system
PDA
Translator
E-book

Preliminary Release
Contact us for detail information.

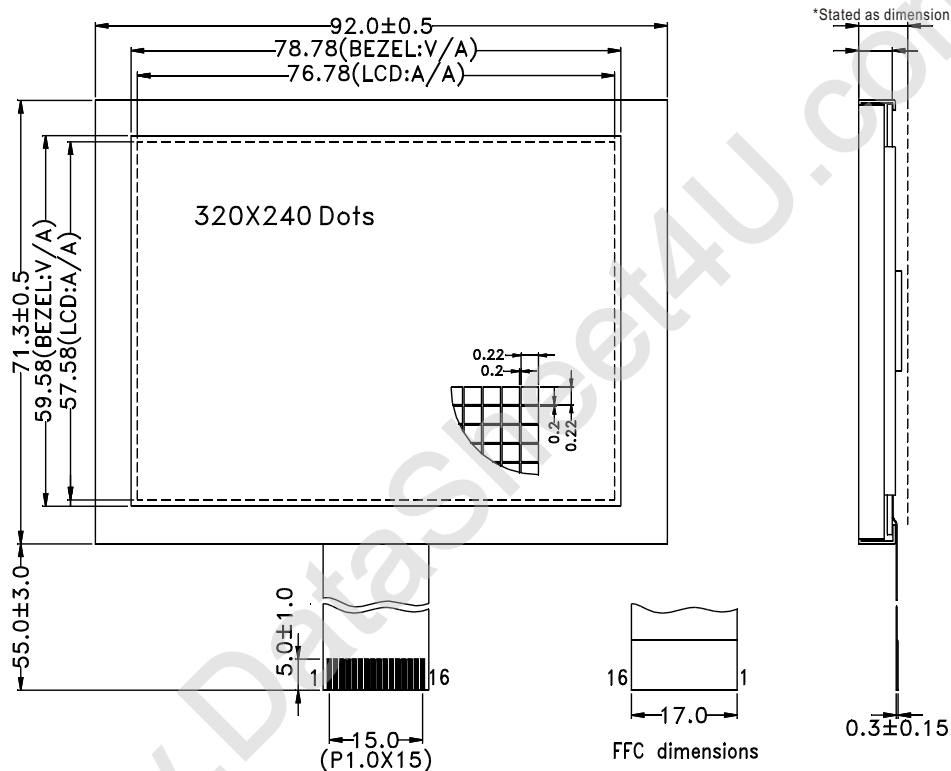

Dimension

Dot size: W0.20 x H0.20 mm
Dot pitch: W0.22 x H0.22 mm
Active area: W76.78 x H57.58 mm
View area: W78.78 x H59.58 mm
Outline: W92.05 x H71.30 mm
Thickness: W/EL- max. 7.4 mm, plus touch panel max. 8.8mm
W/LED- max. 7.9mm, plus touch panel max. 9.3mm

Benefits:

- Supply voltage 5.0V
- Low profile with white EL or LED backlight
- Sample available

Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Symbol	FLM	M	CL1	CL2	$\overline{\text{D-OFF}}$	DB0	DB1	DB2	DB3	VDD	VSS	VEE	VSS	NC	A	K

Head quarters

PowerTip Technology Corporation
8, 6th Road, Taichung Industrial Park,
Taichung, 407 Taiwan
TEL: 886-4-23558168
FAX: 886-4-23558166
[Http://www.powertip.com.tw](http://www.powertip.com.tw)
E-mail: sales@mail.powertip.com.tw

Manufacturing bases

Taiwan LCM factory
Taichung Industrial Park,
Taichung, Taiwan
China LCM factory
Dong Keng,
Dung Guan, China
Taiwan LCD factory
Taichung Industrial Park,
Taichung, Taiwan
China LCD factory
Dong Keng,
Dung Guan, China

Abroad contacts

PowerTip Technology Limited
Room 02, 9/F, Block A,
Po Lung Centre,
11 Wang Chiu Road,
Kowloon Bay, Kowloon, H.K.
TEL: 852-31070920
FAX: 852-31070936
PowerTip Technology, Inc.
18 Technology Drive, Suite 161,
Irvine, CA92618, U.S.A.
TEL: 1-(949)585-9888
FAX: 1-(949)585-9889
[Http://www.powertipusa.com](http://www.powertipusa.com)
E-mail: sales@powertipusa.com