



## SPECIFICATIONS

|                        |   |                                  |
|------------------------|---|----------------------------------|
| CUSTOMER               | : | PTC                              |
| SAMPLE CODE            | : | SH800480T-010-I03Q               |
| MASS PRODUCTION CODE   | : | PH800480T-010-I03Q               |
| SAMPLE VERSION         | : | 01                               |
| SPECIFICATIONS EDITION | : | 002                              |
| DRAWING NO. (Ver.)     | : | LMD-PH800480T-010-I03Q (Ver.002) |
| PACKAGING NO. (Ver.)   | : |                                  |

**Customer Approved**

**Date:**

| Approved        | Checked         | Designer          |
|-----------------|-----------------|-------------------|
| 廖志豪<br>Rex Liao | 廖志豪<br>Rex Liao | 張慶源<br>Yuan Chang |



- Preliminary specification for design input
- Specification for sample approval

### POWERTIP TECH. CORP.

**Headquarters:**

No.8, 6<sup>th</sup> Road, Taichung Industrial Park,  
Taichung, Taiwan  
台中市 407 工業區六路 8 號

TEL: 886-4-2355-8168  
FAX: 886-4-2355-8166

E-mail: [sales@powertip.com.tw](mailto:sales@powertip.com.tw)  
[Http://www.powertip.com.tw](http://www.powertip.com.tw)

## History of Version

| Date<br>(mm / dd / yyyy) | Ver. | Edi. | Description    | Page     | Design by |
|--------------------------|------|------|----------------|----------|-----------|
| 08/30/2012               | 01   | 001  | New Drawing    | -        | Yuan      |
| 09/03/2012               | 01   | 002  | Modify Drawing | Appendix | Yuan      |
|                          |      |      |                |          |           |
|                          |      |      |                |          |           |
|                          |      |      |                |          |           |
|                          |      |      |                |          |           |
|                          |      |      |                |          |           |
|                          |      |      |                |          |           |
|                          |      |      |                |          |           |
|                          |      |      |                |          |           |
|                          |      |      |                |          |           |
|                          |      |      |                |          |           |
|                          |      |      |                |          |           |
|                          |      |      |                |          |           |
|                          |      |      |                |          |           |
|                          |      |      |                |          |           |
|                          |      |      |                |          |           |
|                          |      |      |                |          |           |
|                          |      |      |                |          |           |
|                          |      |      |                |          |           |

Total: 18 Page

## Contents

### 1. SPECIFICATIONS

- 1.1 Features
- 1.2 Mechanical Specifications
- 1.3 Absolute Maximum Ratings
- 1.4 DC Electrical Characteristics
- 1.5 Optical Characteristics
- 1.6 Backlight Characteristics

### 2. MODULE STRUCTURE

- 2.1 Counter Drawing
  - 2.1.1 LCM Mechanical Diagram
  - 2.1.2 Block Diagram
- 2.2 Interface Pin Description
- 2.3 Timing Characteristics
  - 2.3.1 Clock and Data input waveforms
  - 2.3.2 Data input format
  - 2.3.3 Power ON/OFF sequence

### 3. QUALITY ASSURANCE SYSTEM

### 4. PRECAUTIONS

- 4.1 MOUNTING PRECAUTIONS
- 4.2 OPERATING PRECAUTIONS
- 4.3 ELECTROSTATIC DISCHARGE CONTROL
- 4.4 PRECAUTIONS FOR STRONG LIGHT EXPOSURE
- 4.5 STORAGE

Appendix : LCM Drawing

## 1. SPECIFICATIONS

### 1.1 Features

| Item                | Standard Value   |
|---------------------|--|
| Display Type        | 800 * 3 (RGB) * 480 Dots   |
| LCD Type            | a-Si TFT , Normally white , Transmissive type  |
| Screen size(inch)   | 7.0 inch   |
| Viewing Direction   | 6 O'clock  |
| Color configuration | RGB-Strip  |
| Backlight Type      | LED B/L  |
| Interface           | Digital 18-bits RGB  |
| ROHS                | THIS PRODUCT CONFORMS THE ROHS OF PTC<br>Detail information please refer web side :<br><a href="http://www.powertip.com.tw/news.php?area_id_view=1085560481/">http://www.powertip.com.tw/news.php?area_id_view=1085560481/</a> |

### 1.2 Mechanical Specifications

| Item              | Standard Value               | Unit |
|-------------------|------------------------------|------|
| Outline Dimension | 165(W) x 104.44(L) x 5.2 (H) | mm   |

#### LCD panel

| Item        | Standard Value        | Unit |
|-------------|-----------------------|------|
| Active Area | 152.4 (W) * 91.44 (L) | mm   |

Note : For detailed information please refer to LCM drawing

### 1.3 Absolute Maximum Ratings

#### Module

| Item                        | Symbol          | Condition | Min. | Max. | Unit |
|-----------------------------|-----------------|-----------|------|------|------|
| System Power Supply Voltage | VCC             | GND=0     | -0.3 | 6.0  | V    |
| Operating Temperature       | T <sub>OP</sub> | -         | -20  | 70   | °C   |
| Storage Temperature         | T <sub>ST</sub> | -         | -30  | 80   | °C   |

### 1.4 DC Electrical Characteristics

#### Module

GND = 0V, Ta = 25°C

| Item                    | Symbol          | Condition                            | Min.   | Typ. | Max.   | Unit |
|-------------------------|-----------------|--------------------------------------|--------|------|--------|------|
| Power Supply Voltage    | VCC             | -                                    | 3.0    | 3.3  | 3.6    | V    |
| Input H/L Level Voltage | V <sub>IH</sub> | -                                    | 0.7VCC | -    | VCC    | V    |
|                         | V <sub>IL</sub> | -                                    | 0      | -    | 0.3VCC | V    |
| Supply Current          | I <sub>CC</sub> | VCC = 3.3 V<br>Pattern= Full display | -      | 200  | 260    | mA   |

Note1:Maximum current display

## 1.5 Optical Characteristics

### TFT LCD Module

VCC = 3.3 V, Ta=25°C

| Item  |        | Symbol | Condition                | Min. | Typ. | Max. | unit              |        |
|---|--------|--------|--------------------------|------|------|------|-------------------|--------|
| Response time   | Rise   | Tr     | Ta = 25°C<br>θX, θY = 0° | -    | 6    | 10   | ms                | Note 2 |
|   | Fall   | Tf     |                          | -    | 11   | 16   |                   |        |
| Viewing angle   | Top    | θY+    | CR ≥ 10                  | 60   | 70   | -    | Deg.              | Note 4 |
|   | Bottom | θY-    |                          | 60   | 70   | -    |                   |        |
|   | Left   | θX-    |                          | 50   | 60   | -    |                   |        |
|   | Right  | θX+    |                          | 60   | 70   | -    |                   |        |
| Contrast ratio  |        | CR     | Ta = 25°C<br>θX, θY = 0° | TBD  | TBD  | -    |                   | Note 3 |
| Color of CIE<br>Coordinate<br>(With B/L)                    | White  | X      |                          | TBD  | TBD  | TBD  | -                 | Note 1 |
|   |        | Y      |                          | TBD  | TBD  | TBD  |                   |        |
| Average Brightness<br>Pattern=white display<br>(With LCD)*1 |        | IV     | -                        | TBD  | TBD  | -    | cd/m <sup>2</sup> | Note 1 |
| Uniformity<br>(With LCD)*2                                  |        | △B     | -                        | 70   | -    | -    | %                 | Note 1 |

Note 1:

\*1 :  $\Delta B = B(\min) / B(\max) * 100\%$


\*2 : Measurement Condition for Optical Characteristics:

a : Environment: **25 ± 5** / **60±20%**R.H , no wind , dark room below **10** Lux at typical lamp current and typical operating frequency.

b : Measurement Distance: **500 ± 50** mm , ( $\theta = 0^\circ$ )

c : Equipment: **TOPCON BM-7 fast** , (field  $1^\circ$ ) , after **10** minutes operation.

d : The uncertainty of the C.I.E coordinate measurement  $\pm 0.01$  , Average Brightness  $\pm 4\%$

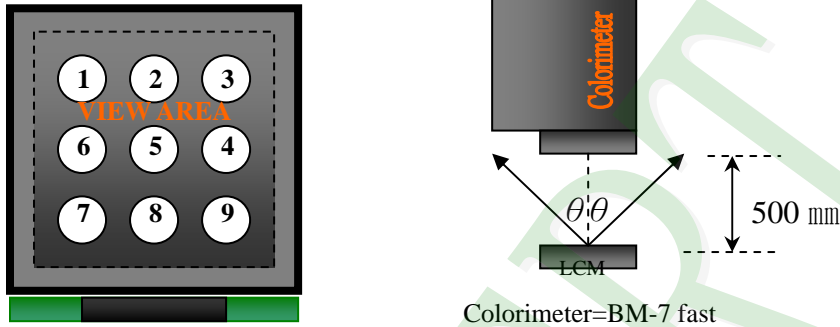

To be measured at the center area of panel with a viewing cone of  $1^\circ$  by Topcon luminance meter BM-7, after 10 minutes operation (module)

Note2: Definition of response time:


The output signals of photo detector are measured when the input signals are changed from "black" to "white"(falling time) and from "white" to "black"(rising time), respectively. The response time is defined as the time interval between the 10% and 90% of Amplitudes.

Refer to figure as below:

Normally White



### Normally Black

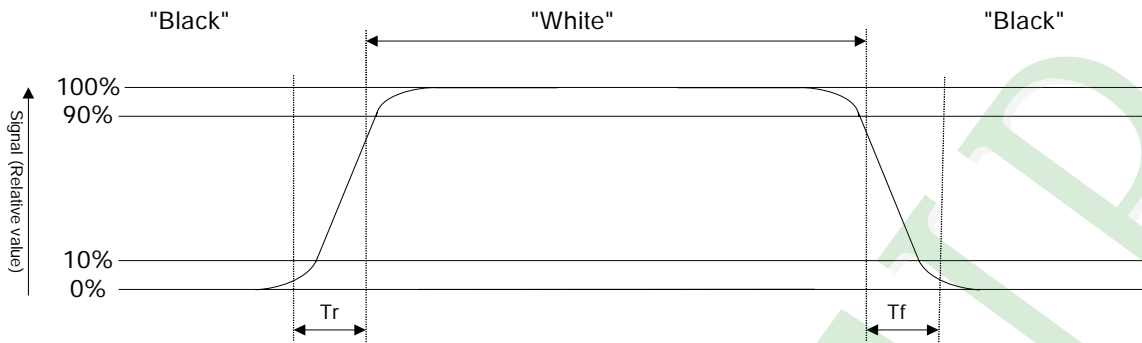


Note3: Definition of contrast ratio:

Contrast ratio is calculated with the following formula

$$\text{Contrast ratio (CR)} = \frac{\text{Photo detector output when LCD is at "White" state}}{\text{Photo detector output when LCD is at "Black" state}}$$

Note4: Definition of viewing angle:

Refer to figure as below:

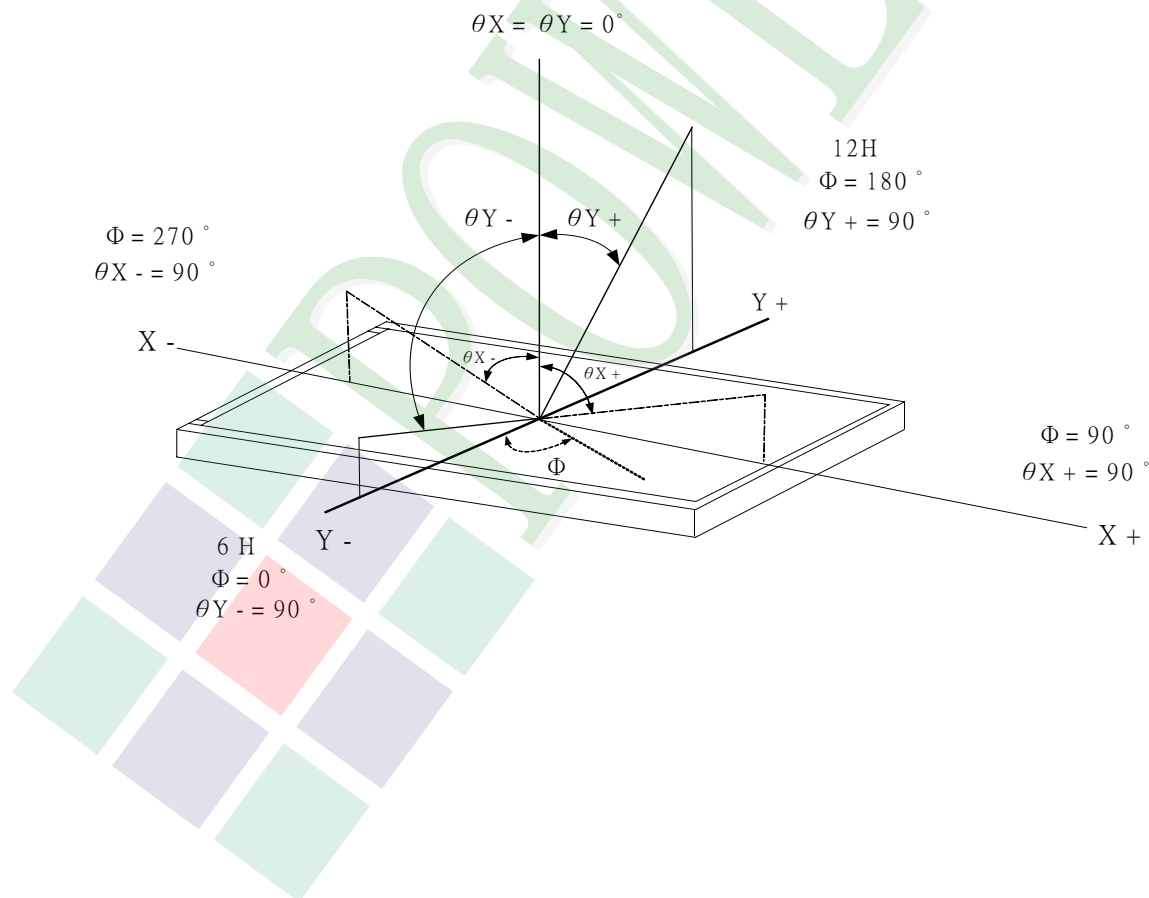




## 1.6 Backlight Characteristics

### Backlight Characteristics

| Item          | Symbol           | Conditions | Min.  | Typ.  | Max. | Unit |
|---------------|------------------|------------|-------|-------|------|------|
| LED current   | I <sub>LED</sub> | -          | -     | 160   | -    | mA   |
| LED voltage   | V <sub>LED</sub> |            | -     | 9.9   | -    | V    |
| LED Life Time | -                |            | 10000 | 20000 | -    | -    |
| Color         | White            |            |       |       |      |      |

Note: Brightness to be decreased to 50% of the initial value.

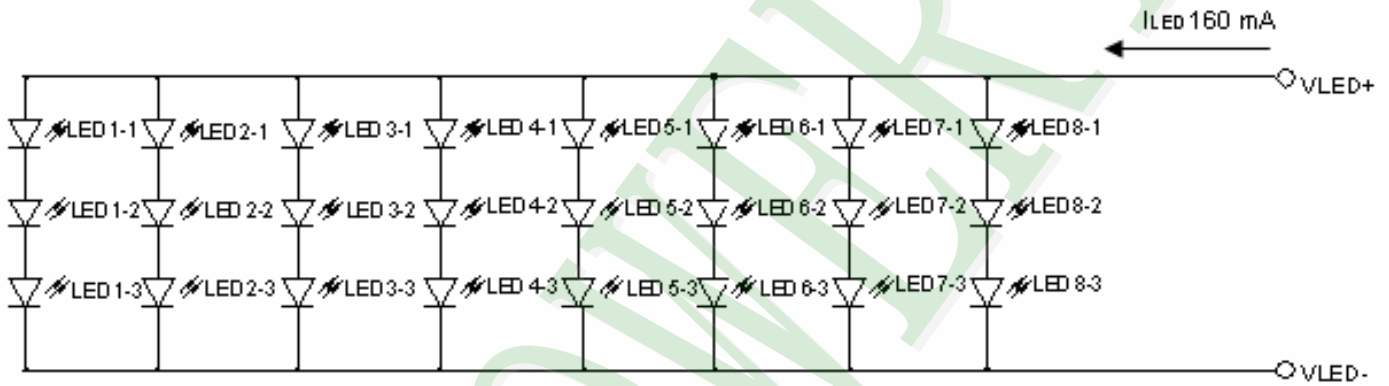


## 2. MODULE STRUCTURE

### 2.1 Counter Drawing

#### 2.1.1 LCM Mechanical Diagram

\* See Appendix

#### 2.1.2 Block Diagram

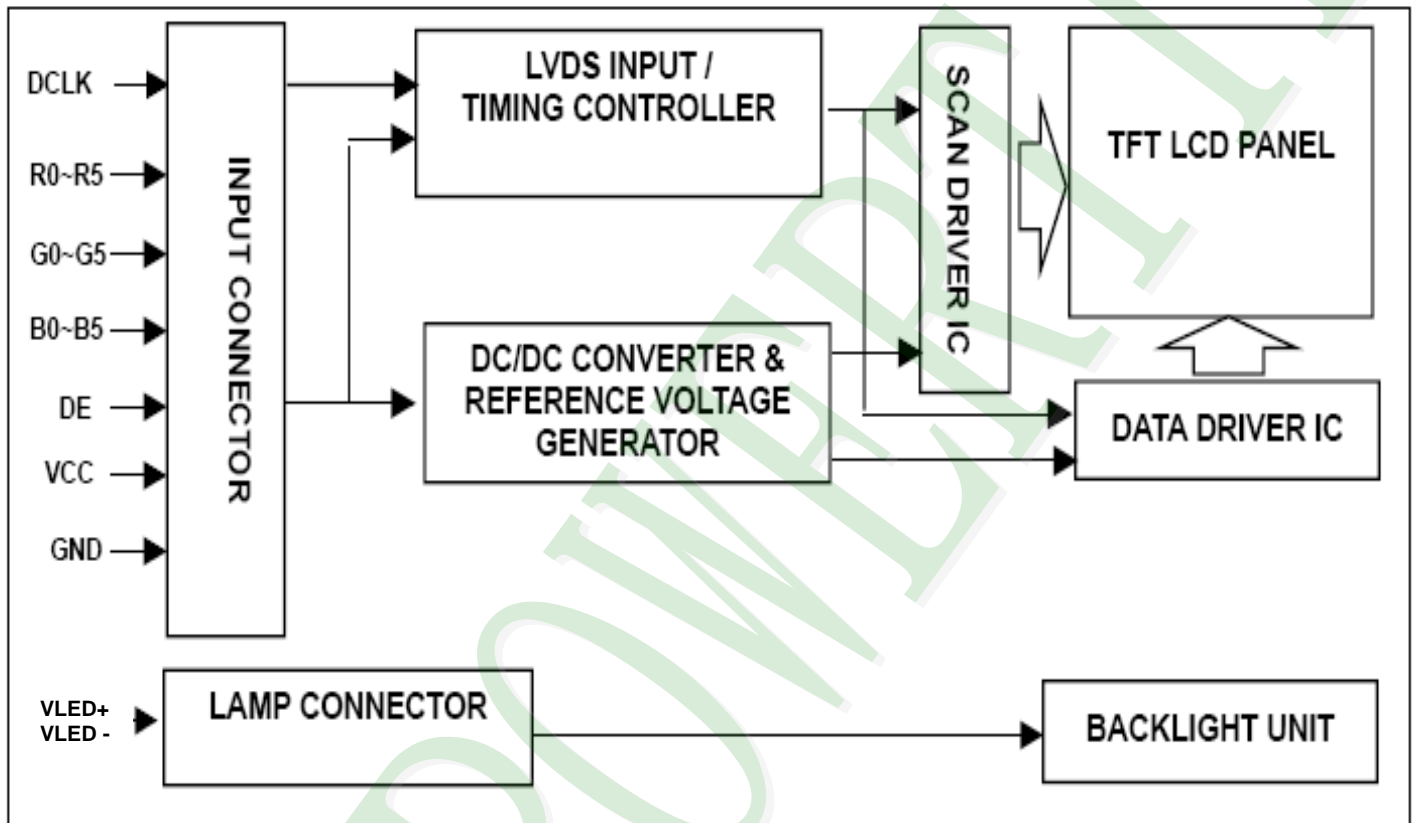

## 2.2 Interface Pin Description

| Pin NO. | SYMBOL | DESCRIPTION                      |
|---------|--------|----------------------------------|
| 1       | GND    | Power Ground                     |
| 2       | GND    | Power Ground                     |
| 3       | NC     | NC                               |
| 4       | Vcc    | Power Supply for Digital Circuit |
| 5       | Vcc    | Power Supply for Digital Circuit |
| 6       | Vcc    | Power Supply for Digital Circuit |
| 7       | Vcc    | Power Supply for Digital Circuit |
| 8       | NC     | NC                               |
| 9       | DE     | Data Enable                      |
| 10      | GND    | Power Ground                     |
| 11      | GND    | Power Ground                     |
| 12      | GND    | Power Ground                     |
| 13      | B5     | Blue Data 5 (MSB)                |
| 14      | B4     | Blue Data 4                      |
| 15      | B3     | Blue Data 3                      |
| 16      | GND    | Power Ground                     |
| 17      | B2     | Blue Data 2                      |
| 18      | B1     | Blue Data 1                      |
| 19      | B0     | Blue Data 0 (LSB)                |
| 20      | GND    | Power Ground                     |
| 21      | G5     | Green Data 5 (MSB)               |
| 22      | G4     | Green Data 4                     |
| 23      | G3     | Green Data 3                     |
| 24      | GND    | Power Ground                     |
| 25      | G2     | Green Data 2                     |
| 26      | G1     | Green Data 1                     |
| 27      | G0     | Green Data 0 (LSB)               |
| 28      | GND    | Power Ground                     |
| 29      | R5     | Red Data 5 (MSB)                 |
| 30      | R4     | Red Data 4                       |
| 31      | R3     | Red Data 3                       |
| 32      | GND    | Power Ground                     |
| 33      | R2     | Red Data 2                       |
| 34      | R1     | Red Data 1                       |
| 35      | R0     | Red Data 0 (LSB)                 |




|    |      |               |
|----|------|---------------|
| 36 | GND  | Power Ground  |
| 37 | GND  | Power Ground  |
| 38 | DCLK | Clock Signals |
| 39 | GND  | Power Ground  |
| 40 | GND  | Power Ground  |

| Pin NO. | SYMBOL | DESCRIPTION          |
|---------|--------|----------------------|
| 1       | VLED+  | LED_ Anode (Red)     |
| 2       | VLED-  | LED_ Cathode (White) |

## 2.3 Timing Characteristics


### 2.3.1 Clock and Data input waveforms

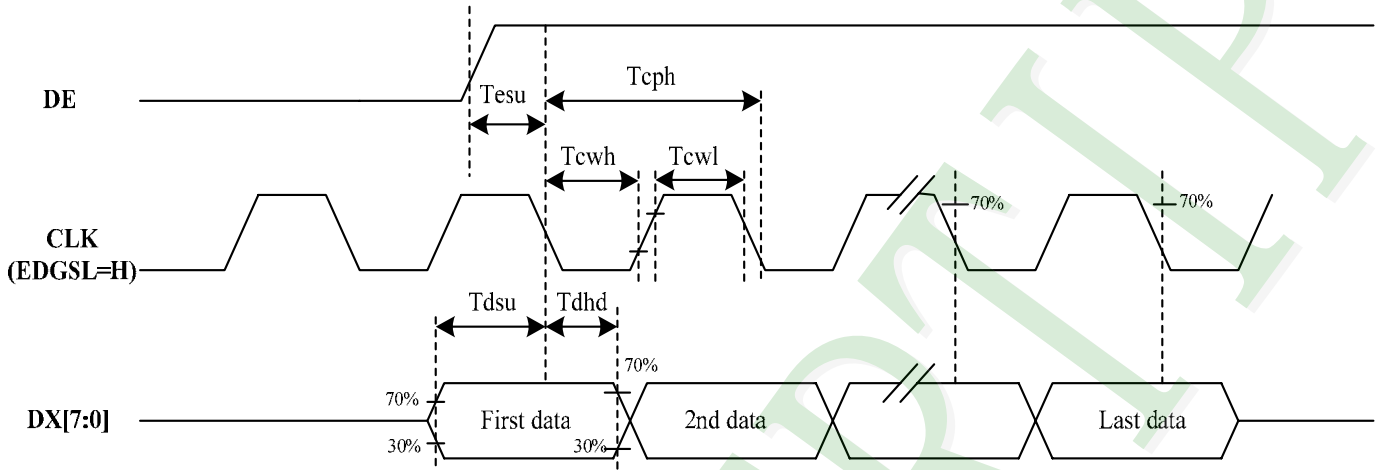


| Parameter         | Symbol    | Rating |       |       | Unit      |
|-------------------|-----------|--------|-------|-------|-----------|
|                   |           | Min.   | Typ.  | Max.  |           |
| Data setup time   | Tdsu      | 6      | -     | -     | ns        |
| Data hold time    | Tdhd      | 6      | -     | -     | ns        |
| CLK setup time    | Tesu      | 6      | -     | -     | ns        |
| DE frequency      | FCPH      | 29.40  | 33.26 | 42.48 | MHZ       |
| CLK period        | TCPH      | 23.54  | 30.06 | 34.01 | ns        |
| CLK pulse duty    | TCWH      | 40     | 50    | 60    | %         |
| CLK pulse duty    | TCWL      | 40     | 50    | 60    | %         |
| DE Period         | TDEH+TDEL | 1000   | 1056  | 1200  | TCPH      |
| DE pulses width   | TDEH      | -      | 800   | -     | TCPH      |
| DE frame blanking | TDEB      | 10     | 45    | 110   | TDEH+TDEL |
| DE frame width    | TDE       | -      | 480   | -     | TDEH+TDEL |

Note : We suggest using the typical value, so it can have better performance.

### 2.3.2 Data input format

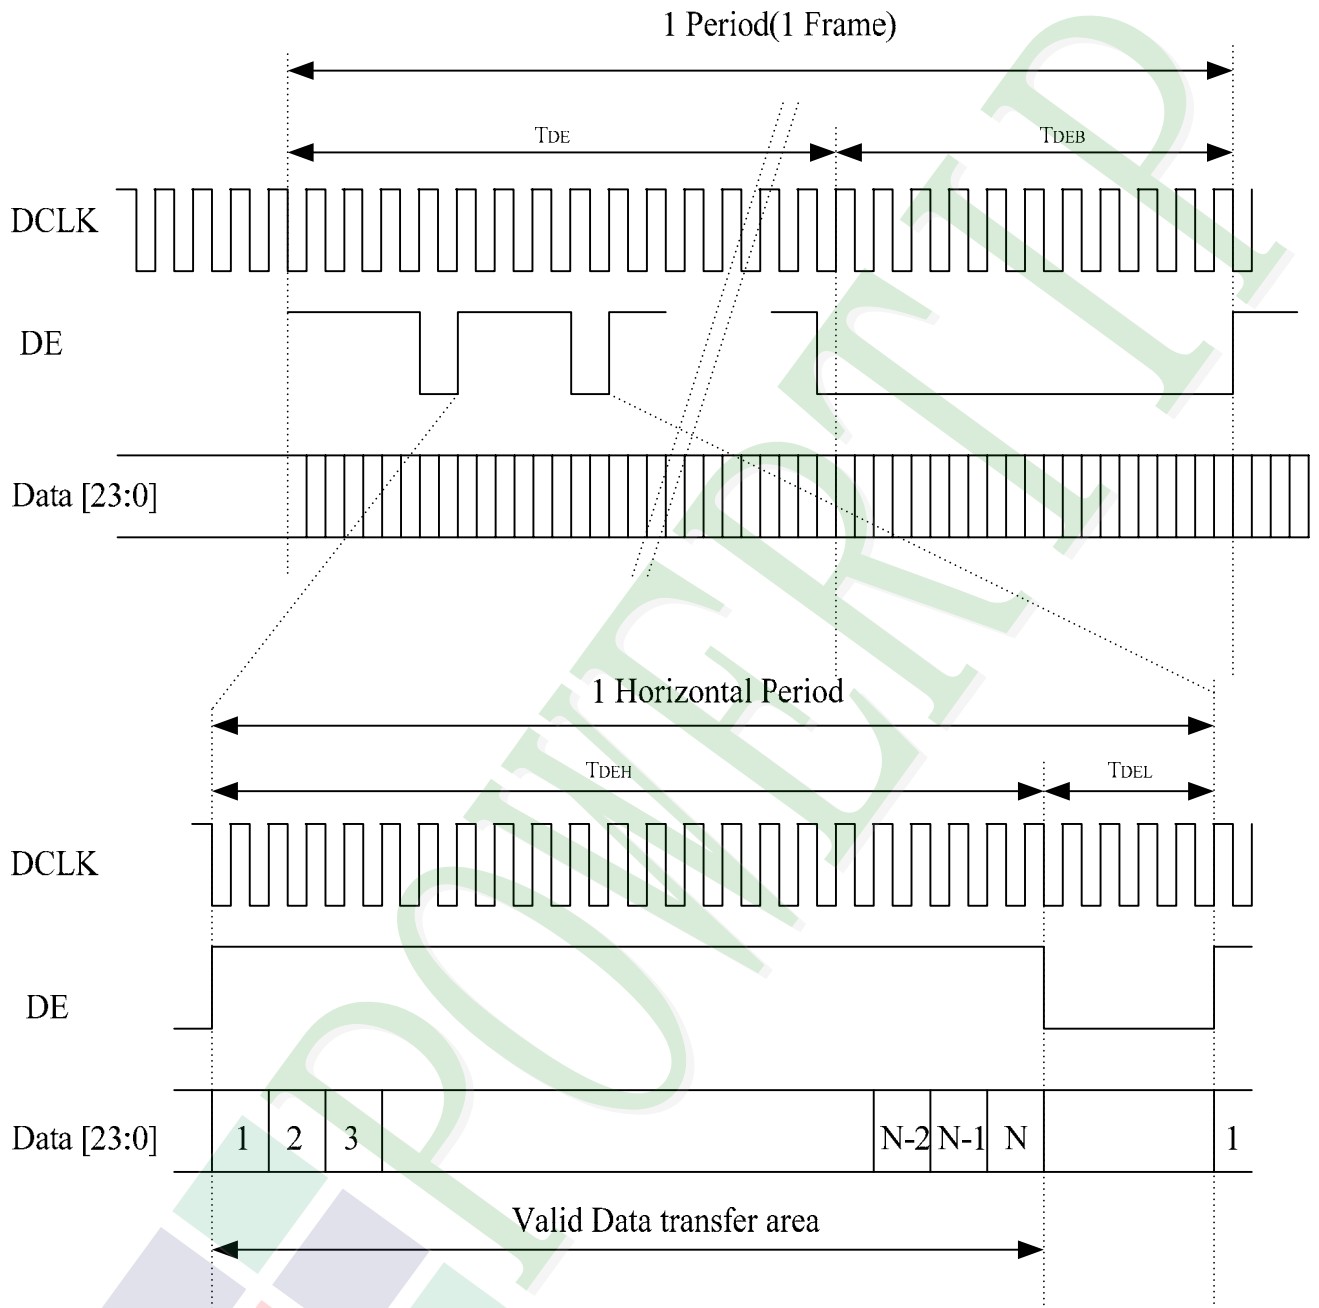

### 2.3.3 Power ON/OFF sequence

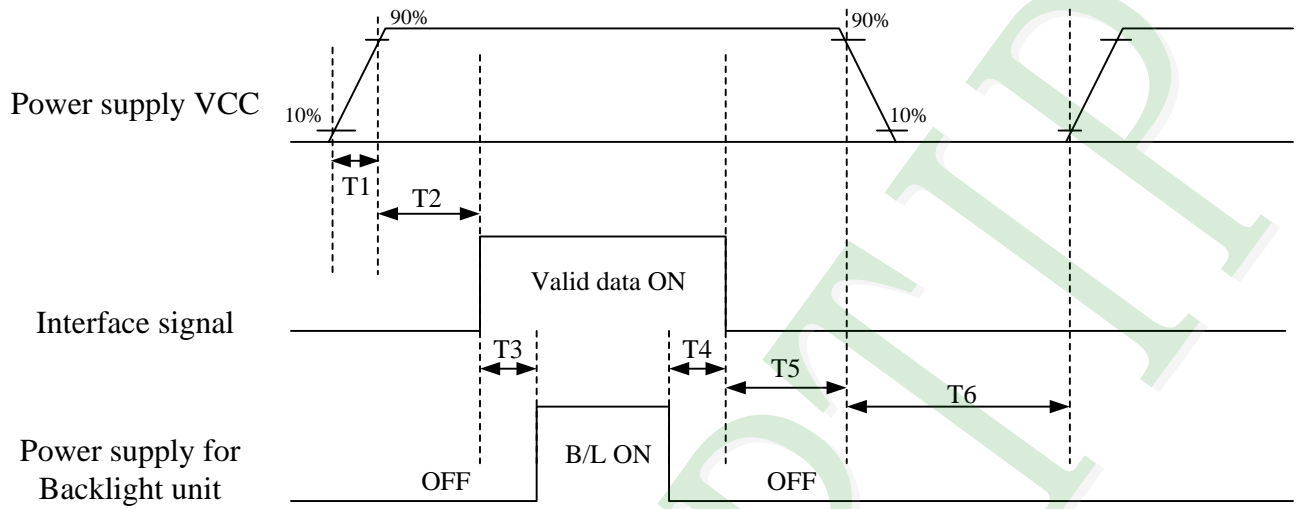

| Parameter | Rating |      |      | Unit |
|-----------|--------|------|------|------|
|           | Min.   | Typ. | Max. |      |
| T1        | 1      |      | 2    | ms   |
| T2        | 0      | 60   |      | ms   |
| T3        | 200    |      |      | ms   |
| T4        | 200    |      |      | ms   |
| T5        | 1      |      |      | ms   |
| T6        | 1000   |      |      | ms   |

### 3. QUALITY ASSURANCE SYSTEM

| NO. | Test Items  | Test Condition  | REMARK |
|-----|---|---|--------|
| 1   | High Temperature Storage Test                     | Ta=80 Dry 240h  |        |
| 2   | Low Temperature Storage Test                      | Ta=-30 Dry 240h   |        |
| 3   | High Temperature Operation Test                   | Ta=70 Dry 240h  |        |
| 4   | Low Temperature Operation Test                    | Ta=-20 Dry 240h   |        |
| 5   | High Temperature and High Humidity Operation Test | Ta=60 90%RH 240h  |        |
| 6   | Electro Static Discharge Test                     | 150pF, 330 , ± 8KV(Contact)/ ± 15KV(Air), 5 points/panel, 5 times/point                           |        |
| 7   | Shock Test (non-operating)                        | Half sine wave, 180G, 2ms<br>one shock of each six faces<br>(I.e. run 180G 2ms for all six faces) |        |
| 8   | Vibration Test (non-operating)                    | Sine wave, 10 ~ 500 ~ 10Hz,<br>1.5G, 0.37oct/min<br>3 axis, 1hour/axis                            |        |
| 9   | Thermal Shock Test                                | -20 (0.5h) ~ 70 (0.5h) / 100 cycles(Dry)  |        |

\*\*\*\*\* Ta= Ambient Temperature



## 4. PRECAUTIONS

Please pay attention to the following when you use this TFT LCD module.

### 4.1 MOUNTING PRECAUTIONS

- (1) You must mount a module using arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module.  
And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach a transparent protective plate to the surface in order to protect the polarizer.  
Transparent protective plate should have sufficient strength in order to the resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not describe because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment.  
Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are determined to the polarizer)
- (7) When the surface becomes dusty, please wipe gently with adsorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

### 4.2 OPERATING PRECAUTIONS

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :  $V=\pm 200\text{mV}$ (Over and under shoot voltage)
- (2) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower)  
And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.

- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.

### 4.3 ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wristband etc. And don't touch interface pin directly.

### 4.4 PRECAUTIONS FOR STRONG LIGHT EXPOSURE




Strong light exposure causes degradation of polarizer and color filter.

### 4.5 STORAGE


When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5 and 35 at normal humidity.
- (2) The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.

A B C D E F G H

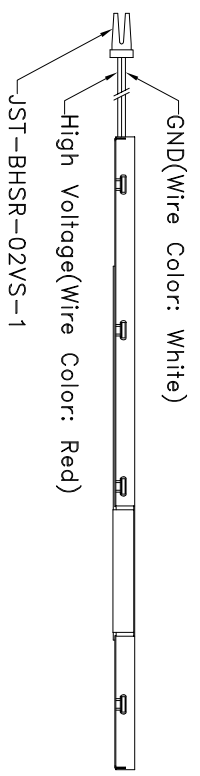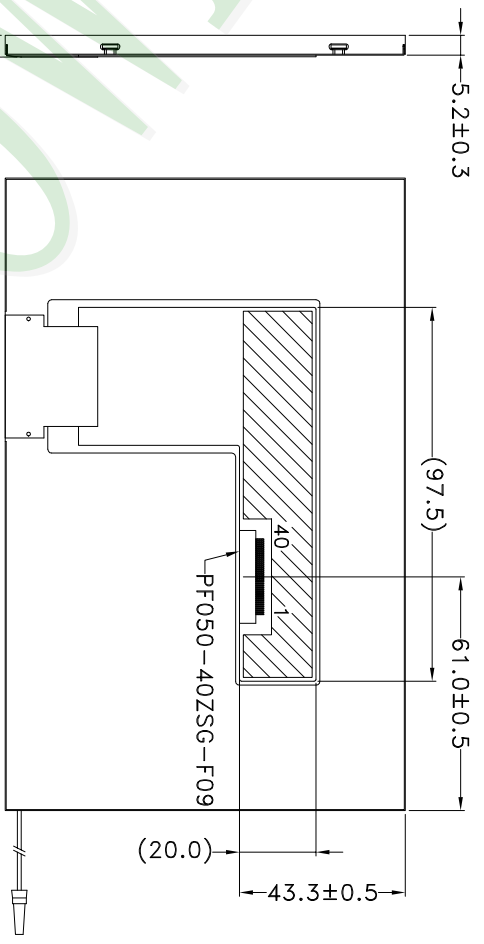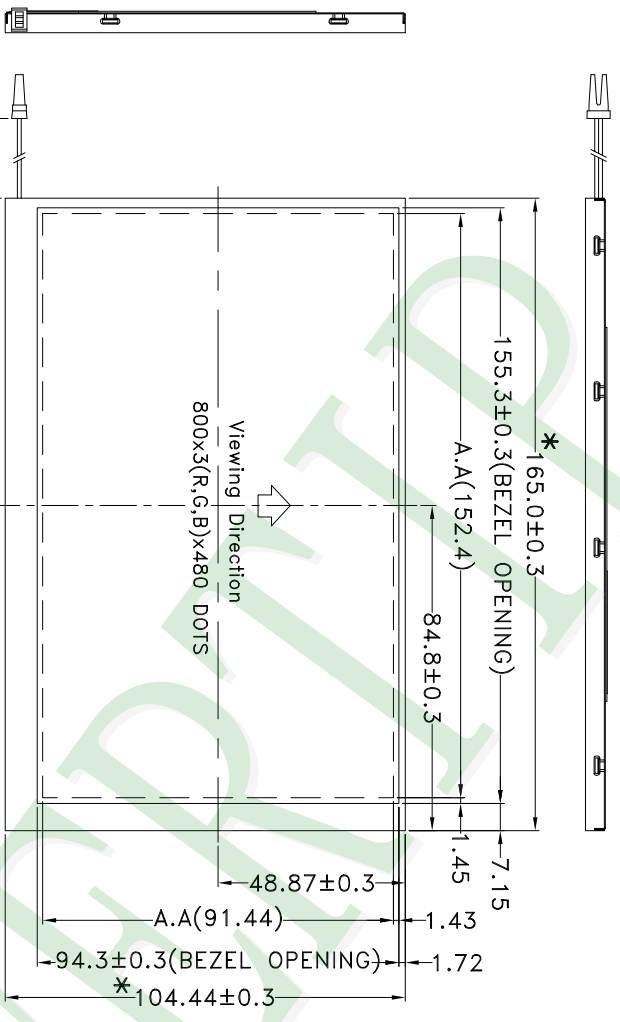

NOTE:  
 1. THE TOLERANCE UNLESS CLASSIFIED ±0.3mm  
 2. \* Important Dimension  
 3. Component area

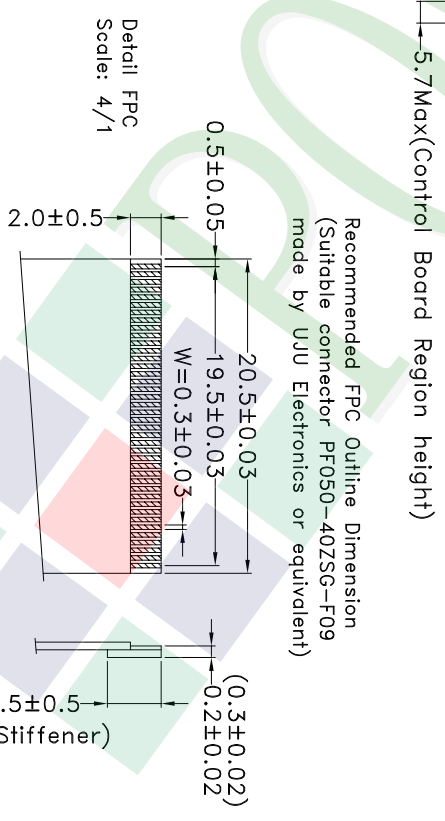

|     |                |               |                        |            |  |           |             |   |  |                 |
|-----|----------------|---------------|------------------------|------------|--|-----------|-------------|---|--|-----------------|
| 007 |                | PART NO:      | PH800480T-010-I03-Q    |            | 久正光电股份有限公司<br>POWER TIP TECHNOLOGY CORPORATION | Design    | Mandy Chang | (3) Surface<br>Unit<br>Scale<br>Material<br>Thickness<br>Quantity | Tolerance (mm)<br>1 ~ 4<br>4 ~ 16<br>16 ~ 63<br>63 ~ 250<br>250 ~ 1000 | Precision Level |
| 006 |                | DRAWING NAME: | LMD-PH800480T-010-I03Q | Check      |  | Tina Chen | MMI         |   |  |                 |
| 005 |                | TITLE:        | LCD MODULE DRAWING     |            | Approve  | Linda Lee | FIT         | 16  | -  |                 |
| 004 |                |               |                        |            |  |           | Page        | 1/1   | -  |                 |
| 003 |                |               |                        |            |  |           |             |   |  |                 |
| 002 | Modify Drawing |               | Mandy                  | 2010/08/31 |  |           |             |   |  |                 |
| 001 | NEW DRAWING    |               | Mandy                  | 2010/08/30 |  |           |             |   |  |                 |
| REV |                | REV BY        | REVISER                | DATE       |  |           |             |   |  |                 |