

## Features


- High-speed:  $t_{PD} = 2.4\text{ns}$  typical into  $15\text{pF}$  @  $5\text{V}$   $V_{CC}$
- Power down high-impedance inputs/outputs
- TTL Input compatible:  $V_{IL} = 0.8\text{V}$  (Max.)  
 $V_{IH} = 2.0\text{V}$  (Min.)
- Packaging: 5-pin space saving SOT23 (T) and SC70 (C)

## Description


The PI74STX1GT04 is an inverter that operates over the 4.5V to 5.5V  $V_{CC}$  operating range. The input threshold levels are TTL compatible. This device can be used for level shifting from 3V to 5V system.

Pericom's PI74STX series of products are produced using the Company's advanced submicron technology.

## Pinout

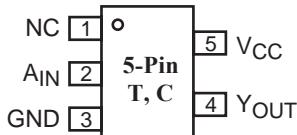

## Block Diagram

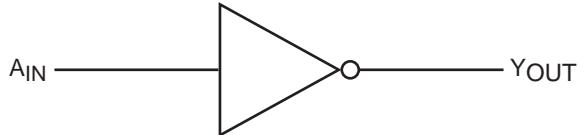

## Pin Description

Pin Names	Description
$A_{IN}$	Input
$Y_{OUT}$	Output

## Function Table

Inputs	Output
$A_{IN}$	$Y_{OUT}$
L	H
H	L

### Note:

H = HIGH Logic Level  
L = LOW Logic Level

## Recommended Operating Conditions<sup>(1)</sup>

Parameter	Condition	Min	Max	Units	
Supply Voltage ( $V_{CC}$ )		4.5	5.5	V	
Input Voltage ( $V_{IN}$ )		0	5.5		
Output Voltage ( $V_{OUT}$ )		0	$V_{CC}$		
Operating Temperature		-40	85	°C	
Input Rise and Fall Time ( $t_r, t_f$ )	$V_{CC}=5.0\text{V}\pm0.5\text{V}$	0	20	ns/V	

### Note:

1. Unused inputs must be held HIGH or LOW. They may not float.

## Absolute Maximum Ratings

Supply Voltage (V <sub>CC</sub> ) .....	-0.5V to +7V	DC Output Diode Current (I <sub>OK</sub> ) .....	-50mA to 20mA
DC Input Voltage V <sub>IN</sub> <sup>(1)</sup> .....	-0.5V to +7V	DC Output Current (I <sub>OUT</sub> ) .....	±50mA
Voltage Range Applied to any Output in the Power-Off State, V <sub>OUT</sub> <sup>(1)</sup> .....	0.5V to +7V	DC V <sub>CC</sub> /GND Current (I <sub>CC</sub> /I <sub>GND</sub> ) .....	±50mA
Voltage Range Applied to any Output in the High or Low State, V <sub>OUT</sub> <sup>(1)</sup> .....	0.5V to V <sub>CC</sub> +0.5V	Storage Temperature (T <sub>STG</sub> ) .....	-65°C to +150°C
DC Input Diode Current (I <sub>IK</sub> ) .....	-50mA to 20mA	Junction Lead Temperature (IOS) .....	200°C
		Power Dissipation SOT23 .....	200mW
		SC70 .....	150mW

### Notes:

Absolute maximum ratings are DC values beyond which the device may be damaged or have its useful life impaired. The datasheet specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Pericom does not recommend operation outside datasheet specifications.

1. The input negative voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.

## DC Electrical Characteristics (Over supply voltage and operating temperature ranges, unless otherwise specified)

Symbol	Parameters	V <sub>CC</sub> (V)	Conditions	T <sub>A</sub> = +25°C			T <sub>A</sub> = -40 to +85°C		Units
				Min.	Typ.	Max.	Min.	Max.	
V <sub>IH</sub>	High Level Input Voltage	4.5 - 5.5		2.0			2.0		V
V <sub>IL</sub>	Low Level Input Voltage	4.5 - 5.5				0.8		0.8	
V <sub>OH</sub>	High Level Output Voltage	4.5	V <sub>IN</sub> = V <sub>IL</sub>	I <sub>OH</sub> = -50µA I <sub>OH</sub> = -8mA	4.4 3.94	4.5 -		4.4 3.8	
V <sub>OL</sub>	Low Level Output Voltage	4.5	V <sub>IN</sub> = V <sub>IH</sub>	I <sub>OL</sub> = 50µA I <sub>OL</sub> = 8mA			0.1 0.36		
I <sub>IN</sub>	Input Leakage Current	0.0 - 5.5	V <sub>IN</sub> = 5.5V or GND			±0.1		±1.0	µA
I <sub>OFF</sub>	Power-Off Leakage Current	0.0	V <sub>IN</sub> or V <sub>OUT</sub> = 5.5V			±1.0		±10	
I <sub>CC</sub>	Quiescent Supply Current	5.5	V <sub>IN</sub> = 5.5V or GND			1.0		10	
I <sub>CCT</sub>	I <sub>CC</sub> per Input	5.5	One input V <sub>IN</sub> = 3.4V One input = V <sub>CC</sub> or GND			1.35		1.50	

### AC Electrical Characteristics

Symbol	Parameter	V <sub>CC</sub> (V)	Conditions	T <sub>A</sub> = +25°C			T <sub>A</sub> = -40°C to +85°C		Units	Fig. No.
				Min.	Typ.	Max.	Min.	Max.		
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation Delay	5.0 ±0.5	C <sub>L</sub> = 15pF		2.4	3.9	1.0	4.2	ns	1, 3
			C <sub>L</sub> = 50pF		2.8	4.9	1.0	5.4		
C <sub>IN</sub>	Input Capacitance	0			3	10		10	pF	2
C <sub>PD</sub>	Power Dissipation Capacitance <sup>(3)</sup>	5.0			25					

#### Notes:

3. C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I<sub>CCD</sub>) at no output loading and operating at 50% duty cycle (see Figure 2). C<sub>PD</sub> is related to I<sub>CCD</sub> dynamic operating current by the expression: I<sub>CCD</sub> = (C<sub>PD</sub>)(V<sub>CC</sub>)(f<sub>IN</sub>) + (I<sub>CC</sub> static).

### AC Loading and Waveforms

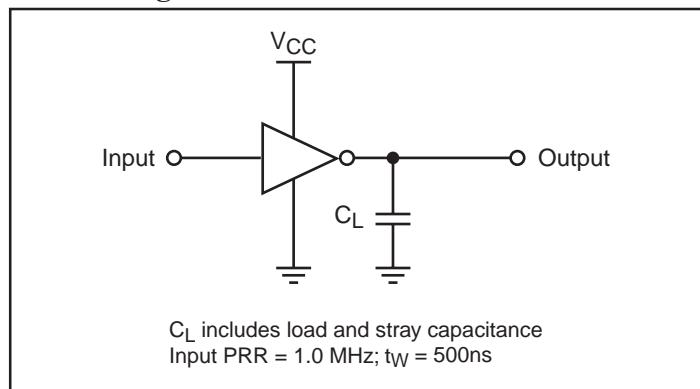


Figure 1. AC Test Circuit

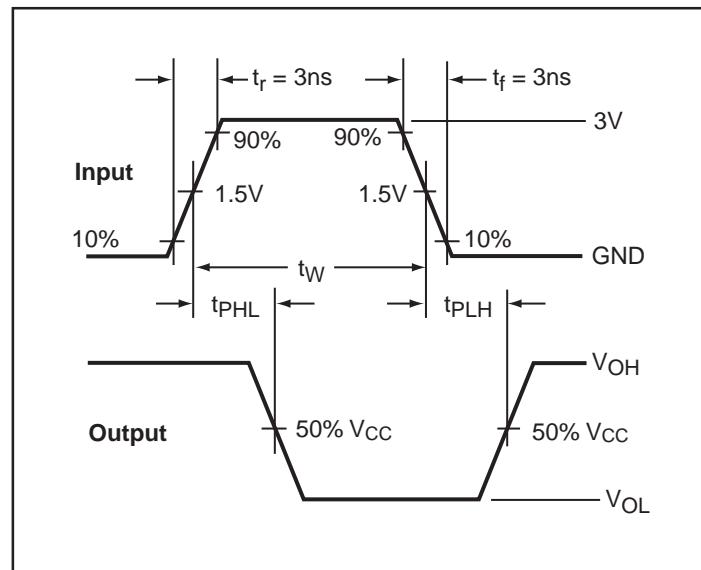


Figure 3. AC Waveforms



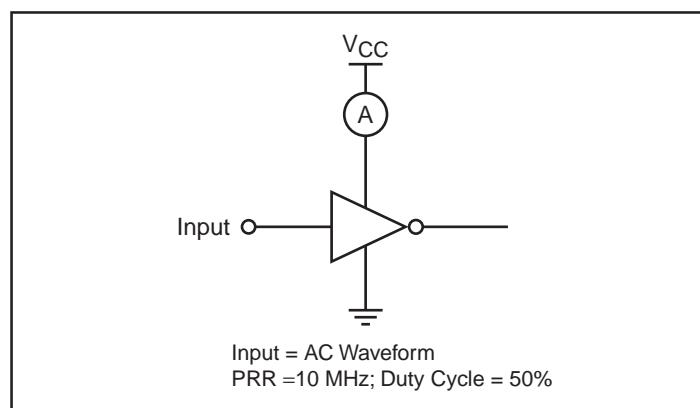


Figure 2. I<sub>CCD</sub> Test Circuit

### Packaging Mechanical: 5-Pin SOT-23 (T)

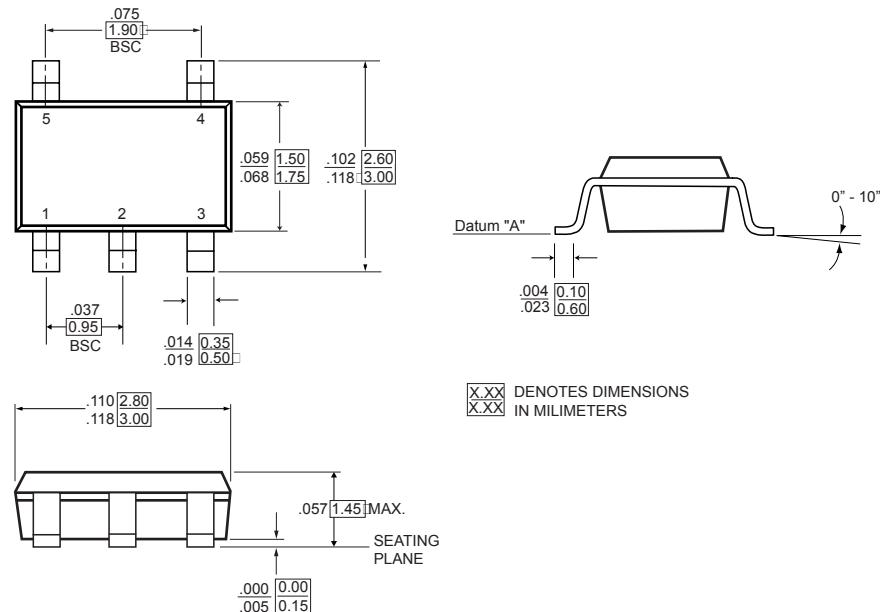

### Packaging Mechanical: 5-Pin SC70 (C)

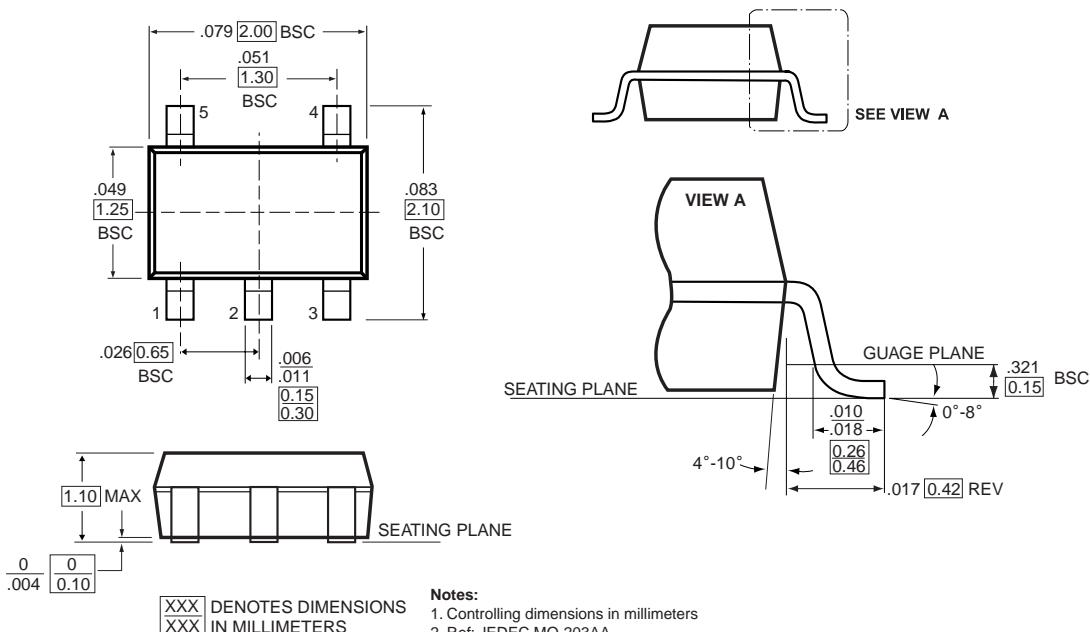

Thermal Characteristics can be found on the web: <http://www.pericom.com/packaging/mechanicals.php>

### Ordering Information

Part	Pin-Package	Top Marking	Operating Range
PI74STX1GT04TX	5-Pin - SOT-23	N04	-40°C to 85°C
PI74STX1GT04CX	5-Pin - SC70	N04	-40°C to 85°C

**Pericom Semiconductor Corporation**

2380 Bering Drive • San Jose, CA 95131 • 1-800-435-2336 • Fax (408) 435-1100 • <http://www.pericom.com>