

PJESD5V6LC-4~PJESD6V8LC-4

TYPICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$)

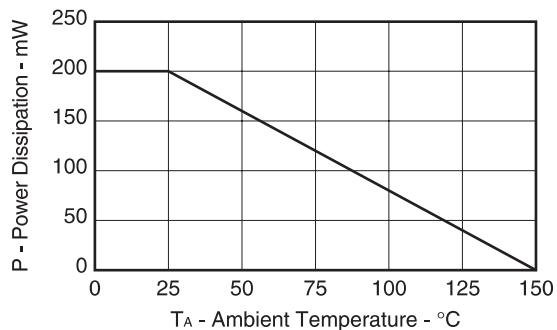


Figure1.P-TA RATING

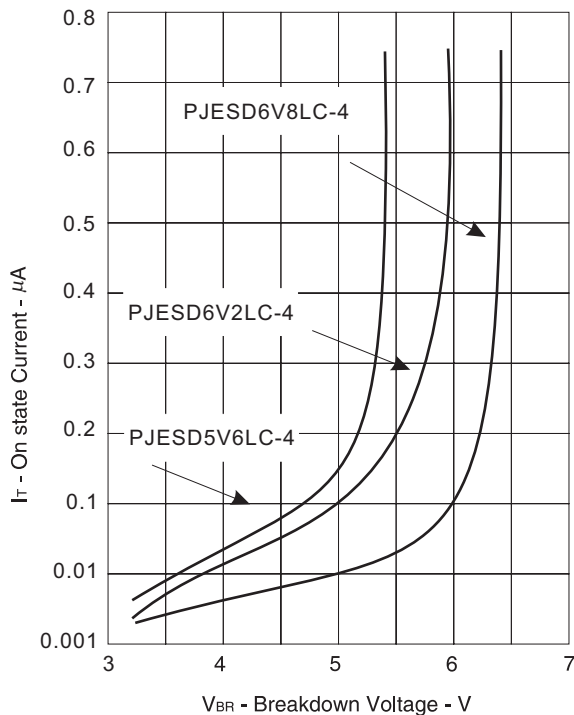


Figure 2.IT-VBR CHARACTERISTICS

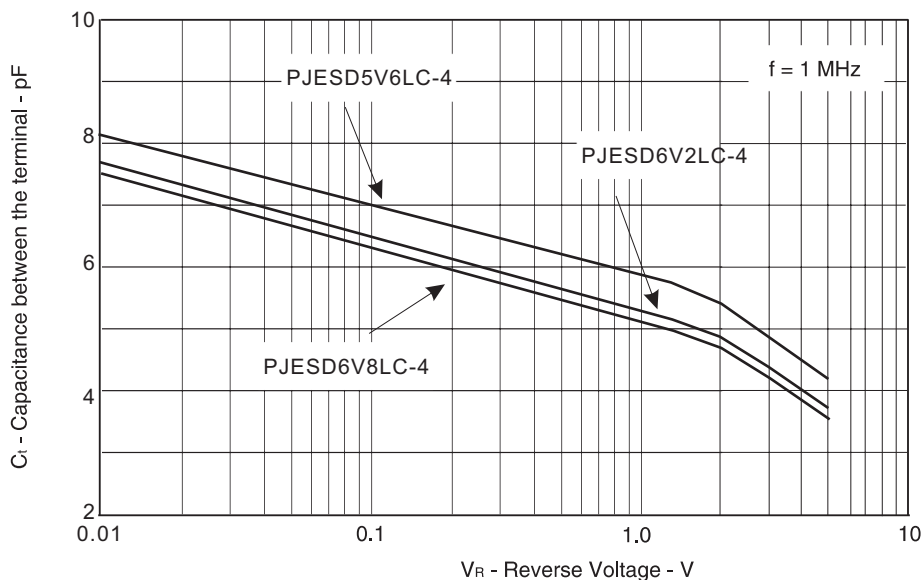


Figure 3.CT-VR CHARACTERISTICS

PJESD5V6LC-4~PJESD6V8LC-4

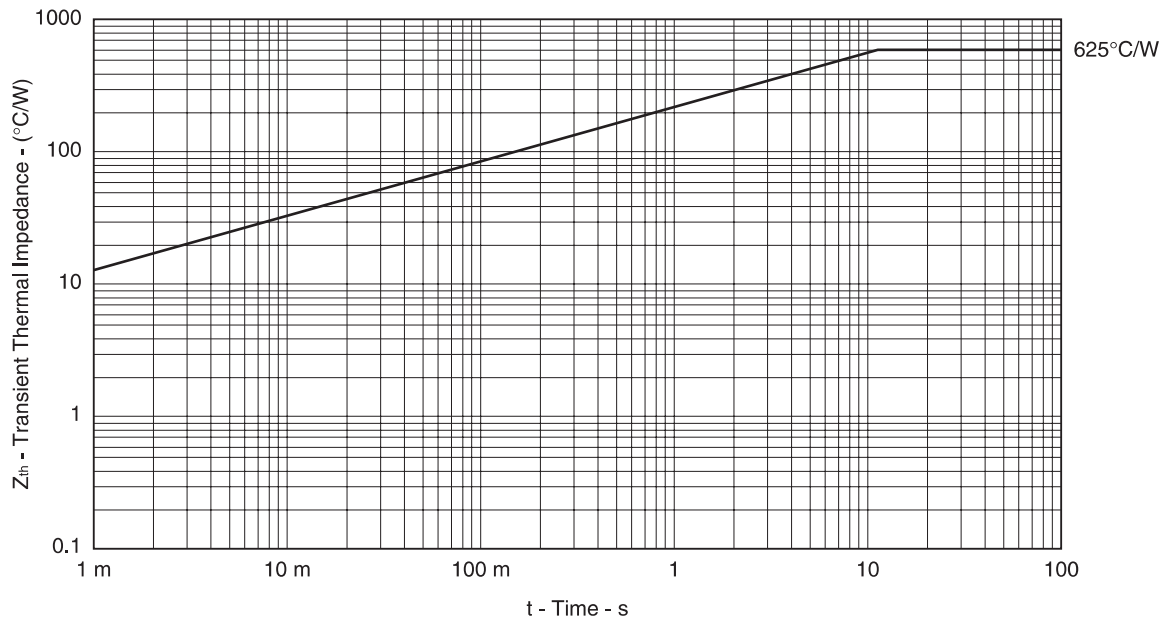


Figure 4. TRANSIENT THERMAL IMPEDANCE


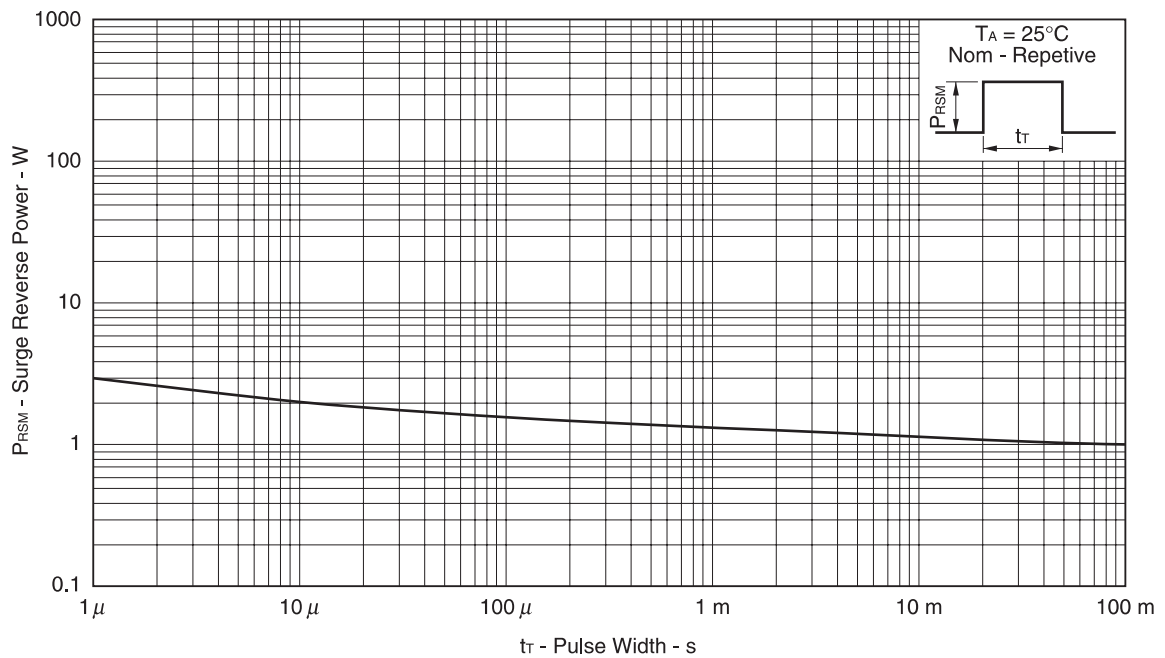


Figure 5. SURGE REVERSE POWER RATING

PJESD5V6LC-4~PJESD6V8LC-4

MOUNTING PAD LAYOUT

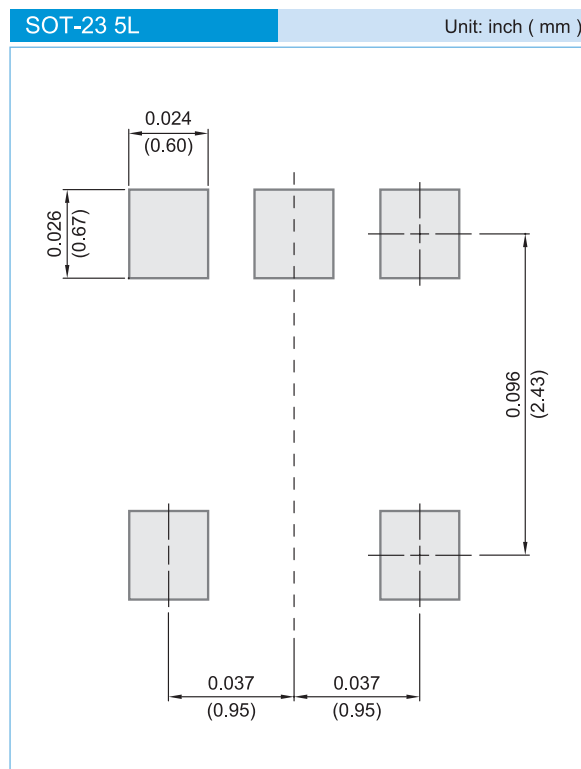

ORDER INFORMATION

- Packing information

T/R - 3K per 7" plastic Reel

T/R - 10K per 13" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2008

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.