

PJESDA5V6-4LCG SERIES

LOW CAPACITANCE QUAD ARREY FOR ESD PROTECTION

FEATURES


- ESD Protection : IEC61000-4-2
- Four Separate Unidirectional Configurations for Protection
- Low Leakage Current < 1 μ A @ 3Volts
- Power Dissipation : 380mW
- Low Capacitance
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: SOT-553, Molded Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Polarity: See Diagram Below
- Approx. Weight: 0.002 gram
- Mounting Position: Any

SOT-553

Unit: inch (mm)

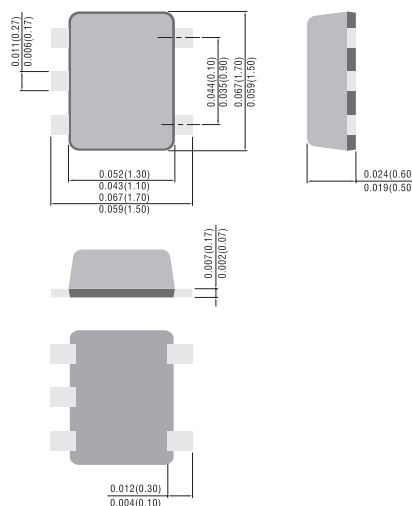

MAXIMUM RATINGS (T_A=25°C unless otherwise noted)


Parameter	Symbol	Value	Units
Peak Power Dissipation (8x20 μ s@T _A =25°C) (Note 1)	P _{PK}	20	W
Steady State Power-1 Diode (Note 2)	P _D	380	mW
Thermal Resistance, Junction-to-Ambient Above 25°C Derate	R θ JA	327 3.05	°C/W mW/°C
Maximum Junction Temperature	T _{JMAX}	150	°C
Operating Junction and Storage Temperature Range	T _J ,T _{STG}	-55 to +150	°C
Lead Solder Temperature (10 seconds duration)	T _L	260	°C

ELECTRAICAL CHARACTERISTICS(T_A=25°C)

Part Number	Breakdown Voltage V _{BR} @ 1mA(Volts)			Leakage Current I _{RM} @V _{RM}		V _C MAX@I _{PP}		Typ Capacitance@0V Bias (pF)(Note 3)		Typ Capacitance@3V Bias (pF)(Note 3)		Marking Code
	Min.	Nom.	Max.	V _{RWM}	I _{RM} (mA)	V _C (V)	I _{PP} (A)	Typ	Max	Typ	Max	
PJESDA5V6-4LCG	5.32	5.60	5.88	3.0	0.5	13	1.6	13	17	7.0	11.5	SH
PJESDA6V2-4LCG	5.89	6.20	6.51	4.3	0.5	13	1.6	12	16	7.0	10.0	SJ
PJESDA6V8-4LCG	6.37	6.71	7.04	5	0.5	13	1.6	12	15	6.7	9.5	SL

NOTES :

- 1.Non-repetitive current per Figure 1.
- 2.Only 1 diode under power. For all 4 diodes under power,P_D will be 25%.
Mounted on FR-4 board with min pad.
- 3.Capacitance of one diode at f=1MHz, V_R=0V, T_A=25°C



PJESDA5V6-4LCG SERIES

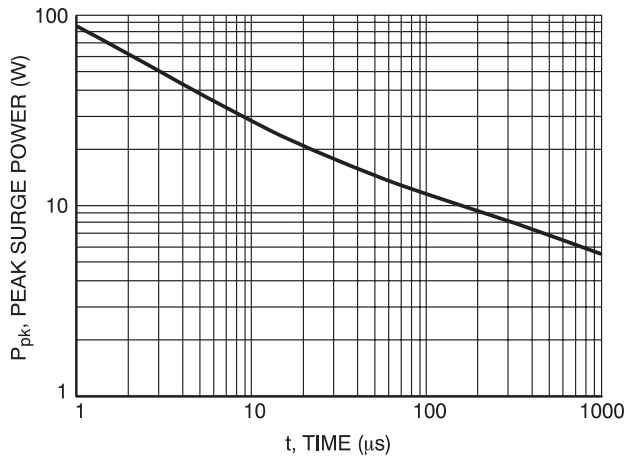


Figure 1. Pulse Width

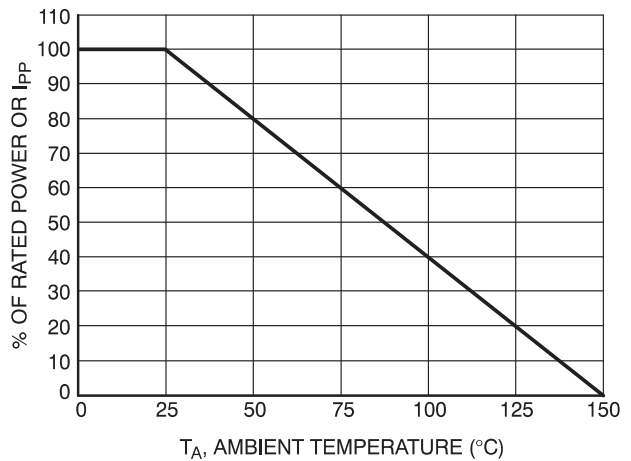


Figure 2. Power Derating Curve

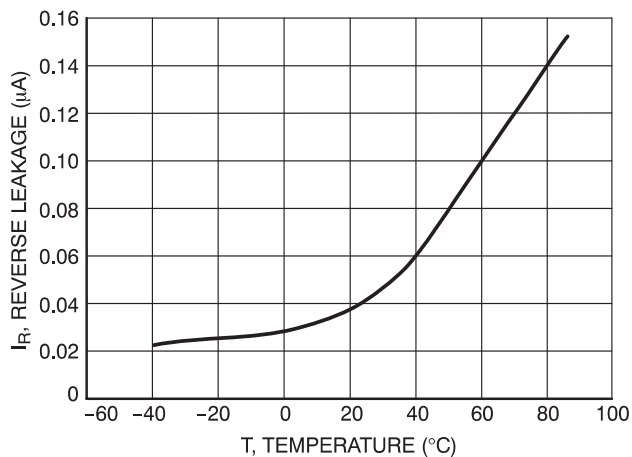


Figure 3. Reverse Leakage versus Temperature

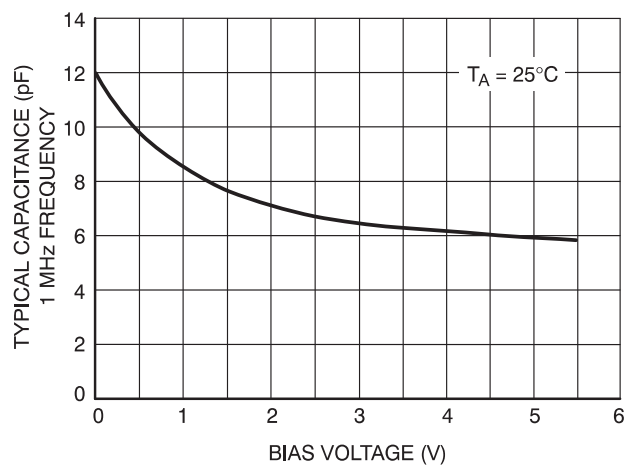


Figure 4. Capacitance

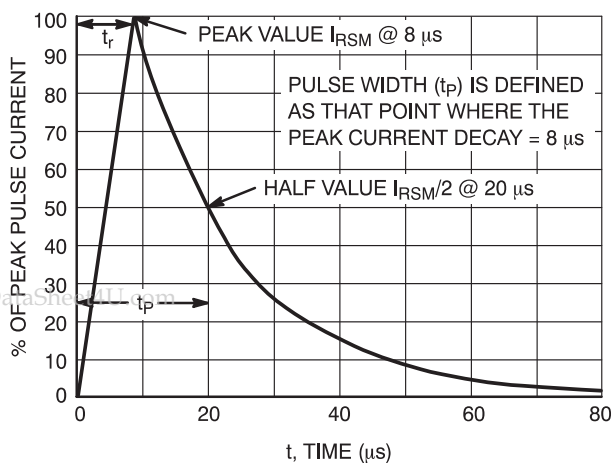


Figure 5. 8 × 20 μs Pulse Waveform


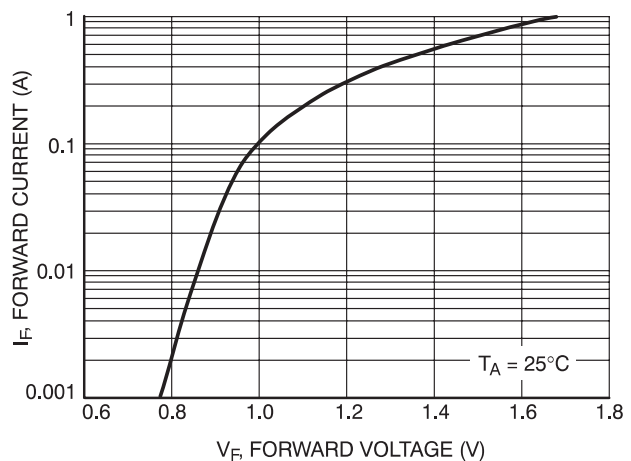


Figure 6. Forward Voltage

PJESDA5V6-4LCG SERIES

MOUNTING PAD LAYOUT

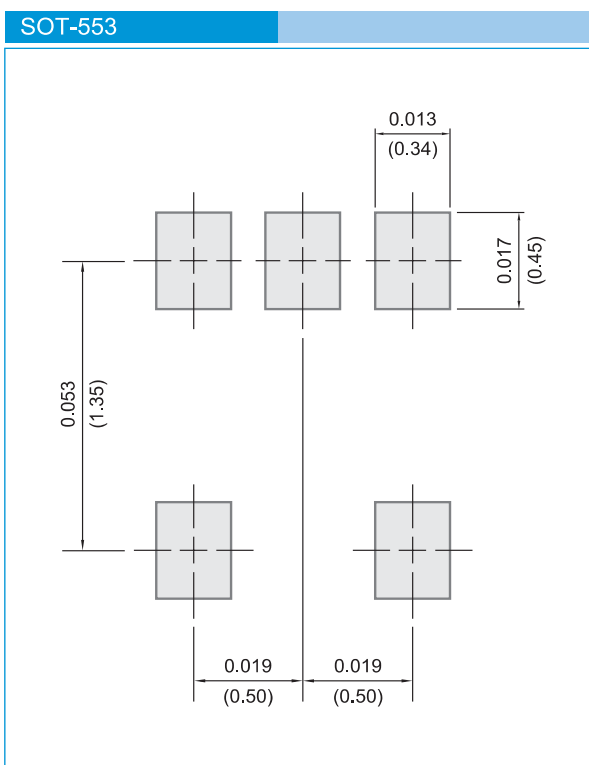

ORDER INFORMATION

- Packing information

T/R - 4K per 7" plastic Reel

T/R - 10K per 13" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2008

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.