



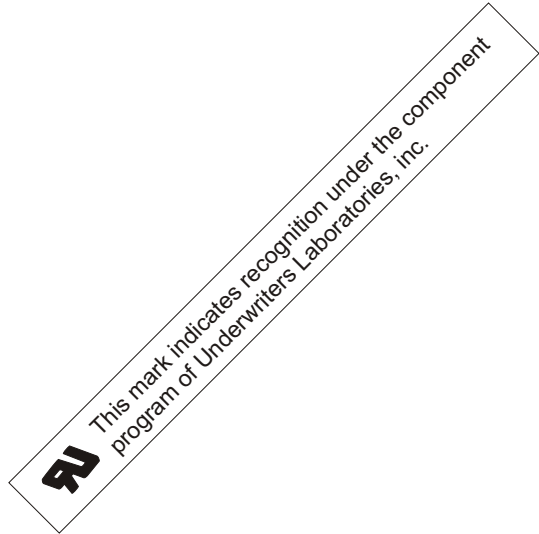

PK

MINIBRIDGE®
 10 AMPERES
 SINGLE-PHASE FULL-WAVE BRIDGES
 HEAT SINK AND CHASSIS MOUNTING

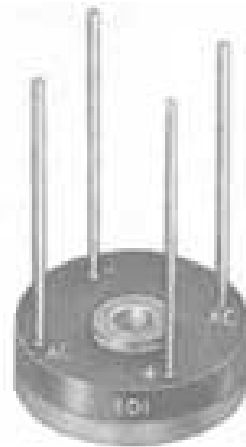

www.DataSheet4U.com

PK SERIES


PRV/Leg	50V	100V	200V	400V	600V	800V	1000V
Type No.	PK05	PK 10	PK 20	PK 40	PK 60	PK 80	PK 100

ELECTRICAL CHARACTERISTICS PER LEG
 (at T_A =25 °C Unless Oterwise Specified)

Max. Forward Voltage Drop, V _F =1.0 V @ I _F =	2.0	Amps
Max. DC Reverse Current @ PRV and 25°C, I _R	3	µA
Max. DC Reverse Current @ PRV and 100°C, I _R	75	µA
Max. Peak Surge Current, I _{FSM} (8.3ms)	150	Amp
Storage Temperature Range, T _{STG}	-55 to +150	°C
Thermal Resistance (Total Bridge), Rθ _{j-c}	5.1 typ.	°C/W


EDI reserves the right to change these specifications at any time without notice.

**Figure 1
PK SERIES CURRENT DERATING**

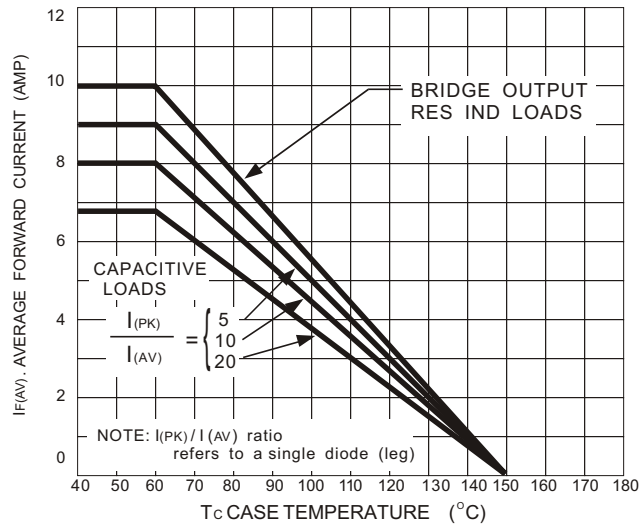


www.DataSheet4U.com

**Figure 2
NON-REPETITIVE SURGE CURRENT**

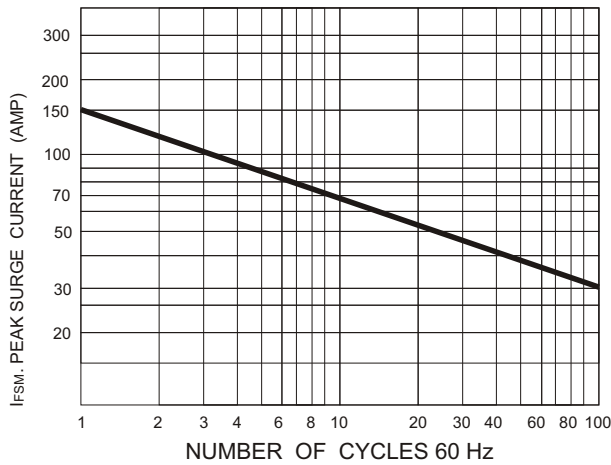


**Figure 3
POWER DISSIPATION**

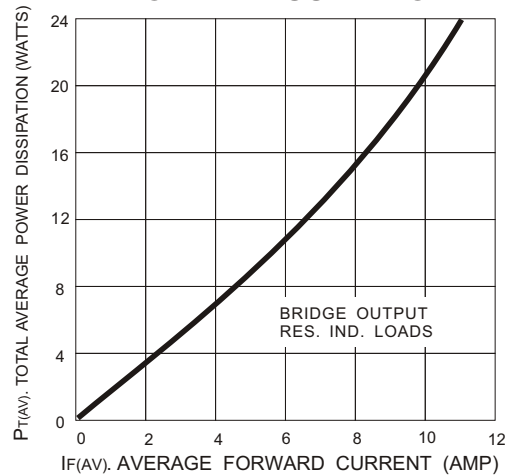

PK SERIES MECH. OUTLINE

Dielectric test voltage 1500 volts rms, max. 50-60Hz

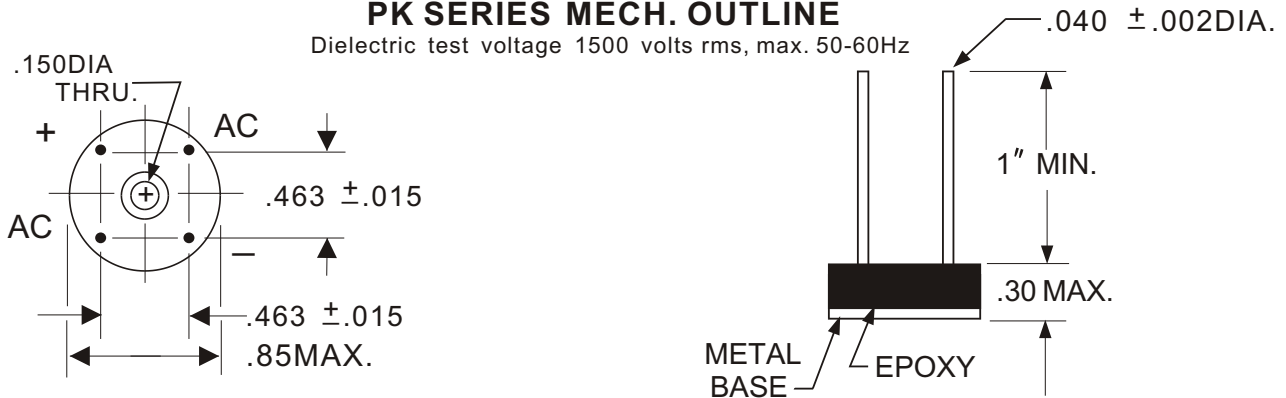

- NOTE: 1. A thin film of silicone thermal compound is recommended between the Minibridge® case and mounting surface for improved thermal conduction.
2. Fast-on terminals available. See PKF Series.

ELECTRONIC DEVICES, INC. DESIGNERS AND MANUFACTURERS OF SOLID STATE DEVICES SINCE 1951.

21 GRAY OAKS AVENUE * YONKERS, NEW YORK 10710 914-965-4400 * FAX 914-965-5531 * 1-800-678-9928
e-mail:sales@ediodes.com * website: http://www.ediodes.com www.DataSheet4U.com