

Low Dropout CMOS Voltage Regulators

PL5209L3

Features

- Maximum output current : 500mA
- Highly accurate : output voltage $\pm 2\%$
- Low power consumption : typ. $2\mu A$
- Small input/output differential:
 - 0.4V at 160mA($V_{out}=3.3V$)
 - 0.12V at 100mA($V_{out}=5V$)

Applications

- Battery powered equipment
- Palmtops
- Portable cameras and video recorders
- Reference voltage sources

Product Description


The PL5209L3 series is a group of positive voltage output, three-pin regulators, that provide a high current even when the input/output voltage differential is small. Low power consumption and high accuracy is achieved through CMOS and programmable fuse technologies. Output voltage: 2V to 6V in 0.1V increments.

The PL5209L3 consists of a high-precision voltage reference, an error correction circuit, and a current limited output driver. Transient response to load variations is improved in comparison to the existing ones.

Absolute Maximum Ratings

Parameter	Symbol	Ratings	Units
Input Voltage	V_{in}	12	V
Output Current	I_{out}	500	mA
Output Voltage	V_{out}	$-0.3 \sim V_{in}+0.3$	V
Continuous Total Power Dissipation	P_D	Internally Limited	W
Operating Ambient Temperature	T_{opr}	$-30 \sim +80$	$^{\circ}C$
Storage Temperature	T_{stg}	$-40 \sim +125$	$^{\circ}C$

Pin Configuration

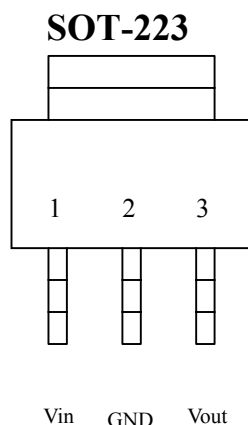

**Ordering Information**

Device	Output Voltage	Package
PL5209-3.3 L3	3.3V	SOT-223
PL5209-5.0 L3	5.0V	SOT-223


Electrical Characteristics @ $V_{IN}=5V$, $T_a=25^{\circ}C$, unless otherwise noted**PL5209-3.3L3**

Parameter	Conditions	Min	Typ	Max	Units
Output Voltage	$I_o=40mA$, $V_{in}=4.3V$	3.234	3.30	3.366	V
Line Regulation $\Delta V_{out}/\Delta V_{in}V_{out}$	$I_o=40mA$, $4.3V < V_{in} < 10V$	-	0.2	0.3	%/V
Load Regulation	$V_{in}=6V$, $1mA < I_o < 80mA$	-	45	90	mV
Current Consumption	$V_{in}=4.3V$	-	1.0	2.9	μA
Dropout Voltage	$I_o=160mA$	-	0.4	0.7	V

PL5209-5.0L3

Parameter	Conditions	Min	Typ	Max	Units
Output Voltage	$I_o=40mA$, $V_{in}=6.0V$	4.900	5.000	5.100	V
Line Regulation $\Delta V_{out}/\Delta V_{in}V_{out}$	$I_o=40mA$, $6.0V < V_{in} < 10V$	-	0.2	0.3	%/V
Load Regulation	$V_{in}=6V$, $1mA < I_o < 100mA$	-	40	80	mV
Current Consumption	$V_{in}=6.0V$	-	2.0	4.5	μA
Dropout Voltage	$I_o=100mA$	-	0.12	0.3	V
	$I_o=200mA$	-	0.38	0.6	V

SOT-223 Dimension

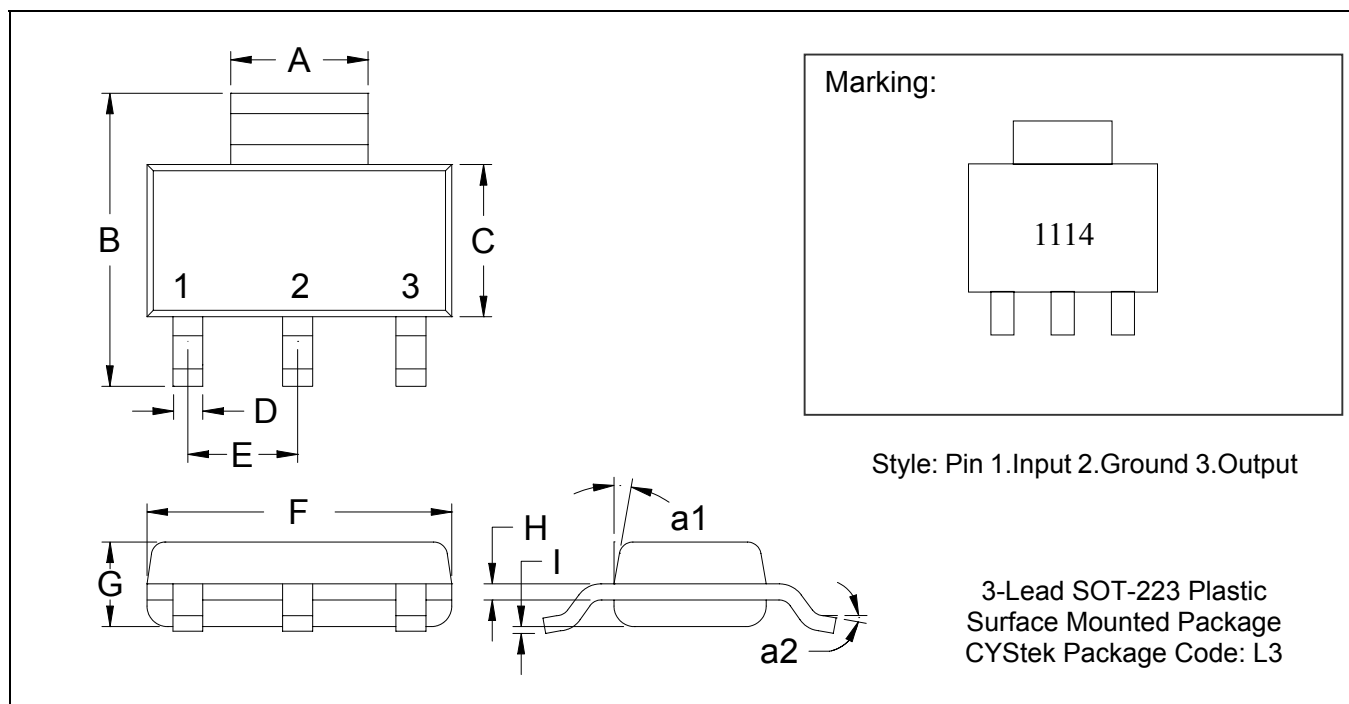

*: Typical

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.1142	0.1220	2.90	3.10	G	0.0551	0.0709	1.40	1.80
B	0.2638	0.2874	6.70	7.30	H	0.0098	0.0138	0.25	0.35
C	0.1299	0.1457	3.30	3.70	I	0.0008	0.0039	0.02	0.10
D	0.0236	0.0315	0.60	0.80	a1	*13°	-	*13°	-
E	*0.0906	-	*2.30	-	a2	0°	10°	0°	10°
F	0.2480	0.2638	6.30	6.70					

Notes: 1.Controlling dimension: millimeters.

2.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.

3.If there is any question with packing specification or packing method, please contact your local CYStek sales office.

Material:

- Lead: 42 Alloy; solder plating
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.