

1.8V to 3.3V Single IC XO with Frequency Tuning (10 MHz to 130 MHz)

Features


- Single Die, Wide Frequency Coverage, Programmable Advanced Oscillator Design
- Single IC to Cover up to 130 MHz Output Frequency.
- Direct Oscillation Operation with Optional Programmable Features:
 - ± 50 ppm Frequency Tuning
 - Output Drive Setting (4 mA, 8 mA, or 16 mA)
 - 6-Bit Odd/Even Output Divider ($\leq \pm 63$)
- Fundamental Crystal Input Frequency:
 - 10 MHz to 60 MHz (Default)
 - 60 MHz to 130 MHz (Programming Option)
- Output Frequency: LVCMOS
 - 80 kHz to 130 MHz
- Wire Bond and Flip Chip Options to Choose from
- Very Low Jitter and Phase Noise
- Low Current Consumption
- Single 1.8V, 2.5V, or 3.3V $\pm 10\%$ Power Supply
- Operating Temperature Range from -40°C to $+85^{\circ}\text{C}$

General Description

The PL610 is a high performance general purpose clock that uses a single die to cover outputs up to 130 MHz, eliminating the need for multiple ICs to cover a wide frequency range. Designed to fit in a small 2.0 mm x 1.6 mm, or larger substrates, the PL610 offers the best phase noise and jitter performance, smallest die size, and lowest power consumption of any comparable IC.

The optional 'frequency fine tuning' feature of PL610 allows for frequency adjustment after encapsulation of the module, up to ± 50 ppm. In addition, there is a '6' bit optional programmable Odd/Even divider (default = $\div 1$), and three programmable output drive strengths (4 mA, 8 mA (default), 16 mA) to choose from. The full feature set of PL610 makes it the most versatile XO for any application.

Block Diagram

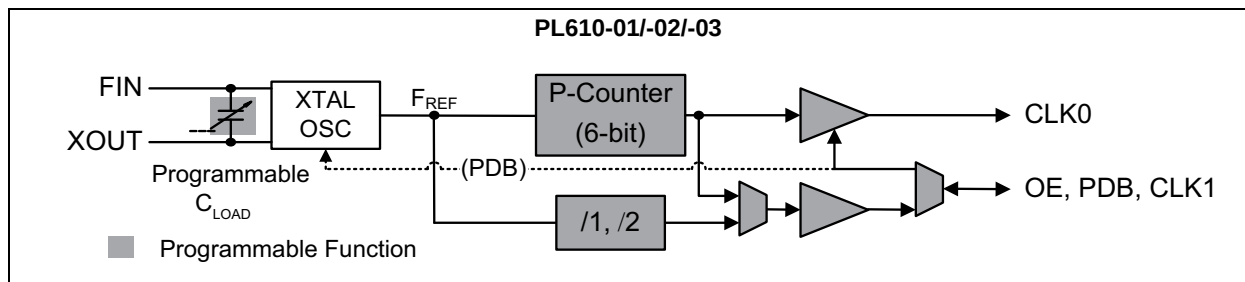

1.0 ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings †

Supply Voltage (V_{DD})		–0.5V to +7.0V
Input Voltage (V_{IN})		–0.5V to $V_{DD} + 0.5V$
Output Voltage (V_{OUT})		–0.5V to $V_{DD} + 0.5V$

† **Notice:** Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability. Parts are tested to commercial grade only.

TABLE 1-1: AC ELECTRICAL CHARACTERISTICS

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Crystal Input Frequency (XIN)	—	10	—	60	MHz	Fundamental Crystal, Low Frequency
		60	—	130		Fundamental Crystal, High Frequency
Output Frequency	—	.080	—	130	MHz	@ $V_{DD} = 1.8V$ to $3.3V$, $\pm 10\%$
V_{DD} Sensitivity	—	-2	—	+2	ppm	Frequency vs. $V_{DD} \pm 10\%$
Output Rise Time (see Figure 3-1)	—	—	1	1.2	ns	15 pF Load, 10/90% V_{DD} , High Drive, 3.3V
Output Fall Time (see Figure 3-1)	—	—	1	1.2	ns	15 pF Load, 10/90% V_{DD} , High Drive, 3.3V
Duty Cycle (Note 1, see Figure 3-1)	—	45	50	55	%	—

Note 1: For 1.8V operation, the 50% $\pm 5\%$ duty cycle is guaranteed for frequencies ≤ 40 MHz.

TABLE 1-2: DC ELECTRICAL CHARACTERISTICS

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Supply Current, Dynamic, with Loaded LVCMOS Output	I_{DD}	—	3.7	—	mA	$V_{DD} = 3.3V$, 40 MHz, Load = 15 pF
		—	2.75	—		$V_{DD} = 2.5V$, 40 MHz, Load = 15 pF
		—	2.0	—		$V_{DD} = 1.8V$, 40 MHz, Load = 15 pF
		—	2.5	—		$V_{DD} = 3.3V$, 26 MHz, Load = 15 pF
		—	1.8	—		$V_{DD} = 2.5V$, 26 MHz, Load = 15 pF
		—	1.3	—		$V_{DD} = 1.8V$, 26 MHz, Load = 15 pF
Supply Current, Dynamic, with Unloaded LVCMOS Output	—	—	1.65	—	mA	$V_{DD} = 3.3V$, 40 MHz, No Load
		—	1.2	—		$V_{DD} = 2.5V$, 40 MHz, No Load
		—	0.9	—		$V_{DD} = 1.8V$, 40 MHz, No Load
		—	1.2	—		$V_{DD} = 3.3V$, 26 MHz, No Load
		—	0.8	—		$V_{DD} = 2.5V$, 26 MHz, No Load
		—	0.58	—		$V_{DD} = 1.8V$, 26 MHz, No Load
Operating Voltage	V_{DD}	1.62	—	3.63	V	—
Power Supply Ramp	t_{PU}	0.001	—	100	ms	Time for V_{DD} to reach 90% V_{DD} . Power ramp must be monotonic.
Output Low Voltage	V_{OL}	—	—	0.1	V	$I_{OL} = +4$ mA Standard Drive
Output High Voltage	V_{OH}	$V_{DD} - 0.4$	—	—	V	$I_{OH} = -4$ mA Standard Drive

PL610-01/-02/-03

TABLE 1-2: DC ELECTRICAL CHARACTERISTICS (CONTINUED)

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Output Current, Low Drive (See Figure 3-2)	I _{OLD}	±4	—	—	mA	V _{OL} = 0.4V, V _{OH} = 2.4V
Output Current, Standard Drive (See Figure 3-2)	I _{OSD}	±8	—	—	mA	V _{OL} = 0.4V, V _{OH} = 2.4V
Output Current, High Drive (See Figure 3-2)	I _{OHD}	±16	—	—	mA	V _{OL} = 0.4V, V _{OH} = 2.4V

TABLE 1-3: CRYSTAL SPECIFICATIONS (10 MHZ TO 60 MHZ)

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Fundamental Crystal Resonator Frequency	F _{XIN}	10	—	60	MHz	—
Crystal Loading Rating (The IC can be programmed for any value in this range.)	C _{L(XTAL)}	8	—	12	pF	—
Maximum Sustainable Drive Level	—	—	—	100	μW	—
Operating Drive Level	—	—	25	—	μW	—
Crystal Shunt Capacitance	C ₀	—	—	3	pF	—
Effective Series Resistance, Fundamental, (See Figure 3-4)	ESR	—	—	50	Ω	—

TABLE 1-4: CRYSTAL SPECIFICATIONS (60 MHZ TO 130 MHZ)

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Fundamental Crystal Resonator Frequency	F _{XIN}	60	—	130	MHz	—
Crystal Loading Rating (The IC can be programmed for any value in this range.)	C _{L(XTAL)}	5	—	8	pF	—
Maximum Sustainable Drive Level	—	—	—	100	μW	—
Operating Drive Level	—	—	25	—	μW	—
Crystal Shunt Capacitance	C ₀	—	—	2.5	pF	—
Effective Series Resistance, Fundamental, (See Figure 3-4)	ESR	—	—	30	Ω	—

TABLE 1-5: PHASE NOISE SPECIFICATIONS (SEE MTC-3)

Parameters	Freq.	@1 Hz	@10 Hz	@100 Hz	@1 kHz	@10 kHz	@100 kHz	@1 MHz	Units
Phase noise relative to carrier (typ.)	40 MHz	–67	–98	–127	–142	–151	–155	–155	dBc/Hz
	26 MHz	–65	–96	–124	–145	–150	–155	–155	

TABLE 1-6: KEY PROGRAMMING PARAMETERS (OPTIONAL)

CLK[0:1] Output Frequency	Crystal Load	Output Drive Strength	Output Dividers
$CLK0 = F_{REF}, F_{REF}/2 \text{ or } F_{REF}/P$ Where $P = 6\text{-bit}$ Optional: $CLK1 = F_{REF}, F_{REF}/2 \text{ or } CLK0$	Optional 'Frequency Tuning' after encapsulation, up to: $\pm 50 \text{ ppm}$ Tuning Range Single-bit C_L adjustment for high/low frequency input	Three optional drive strengths to choose from: - Low: 4 mA - Std: 8 mA (default) - High: 16 mA	Optional 6-bit odd/even output divider: $\div 1$ (default) to $\div 63$

TEMPERATURE SPECIFICATIONS (Note 1)

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Temperature Ranges						
Storage Temperature Range	T _S	–65	—	+150	°C	—
Ambient Operating Temperature	T _A	–40	—	+85	°C	—

Note 1: Exposure of the device under conditions beyond the limits specified by the maximum ratings for extended periods may cause permanent damage to the device and affect product reliability. These conditions represent a stress rating only, and functional operations of the device at these or any other conditions above the operational limits noted in this specification is not implied. Operating temperature is guaranteed by design. Parts are tested to commercial grade only.

2.0 PAD DESCRIPTIONS

The descriptions of the pads are listed in [Table 2-2](#).

Pad Configurations

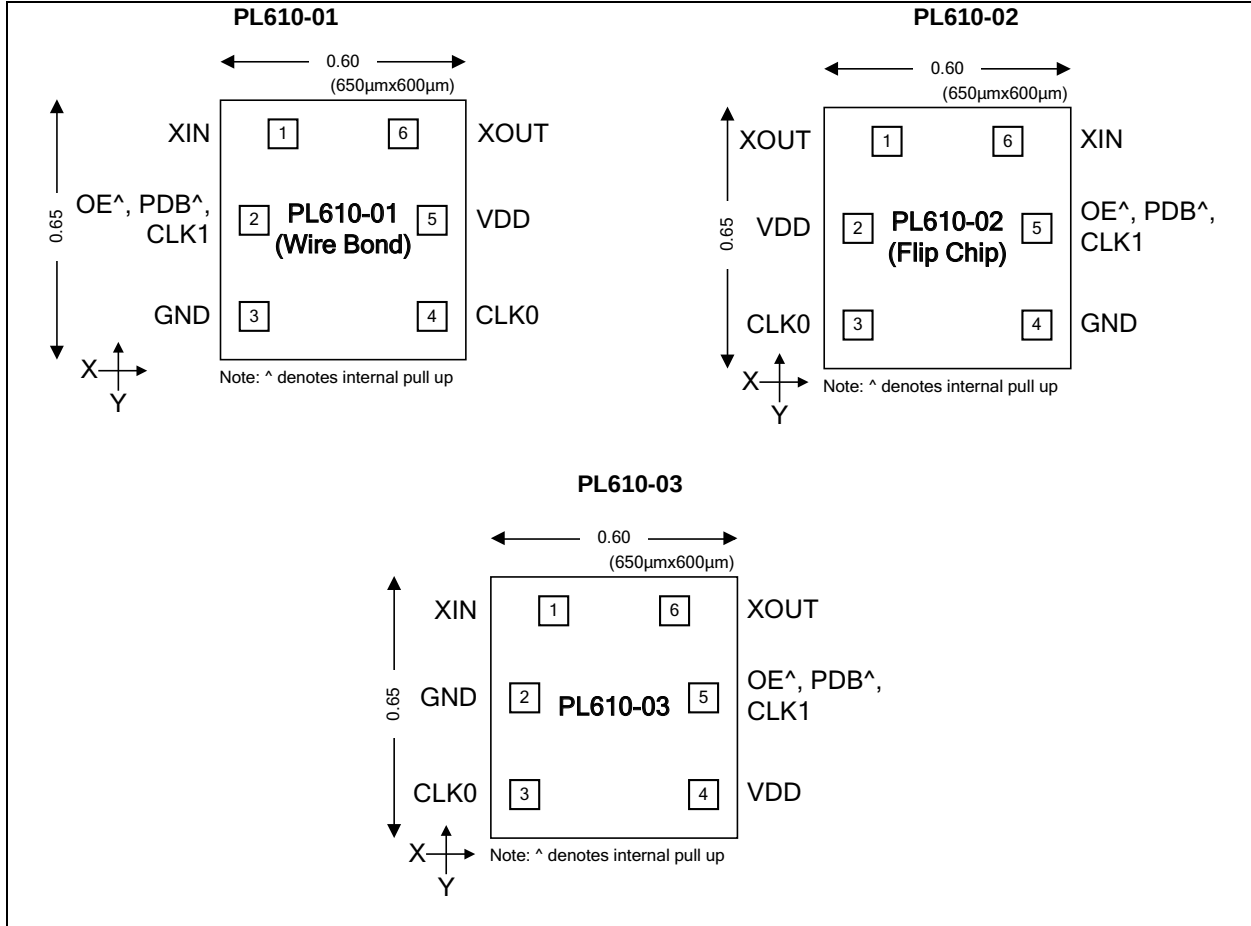


TABLE 2-1: DIE SPECIFICATION

Chip Size	Chip Thickness	Pad Size	Chip Base
0.65 mm x 0.60 mm	Optional	90 μm	GND Level

TABLE 2-2: PAD FUNCTION TABLE

Pad Number	Pad Center		Pad Name PL610-01	Pad Name PL610-02	Pad Name PL610-03
	X	Y			
1	-177	231	XIN	XOUT	XIN
2	-215	41	OE, PDB, CLK1	VDD	GND
3	-215	-186	GND	CLK0	CLK0
4	215	-186	CLK0	GND	VDD
5	215	41	VDD	OE, PDB, CLK1	OE, PDB, CLK1
6	177	213	XOUT	XIN	XOUT

TABLE 2-3: PAD FUNCTION DESCRIPTIONS

Pad Name	Description
CLK0	Programmable clock output
GND	GND connection
OE [^] , PDB [^] , CLK1	Programmable as: Output Enable (OE) – Enables/Disables CLK0 output buffer Power Down (PDB) – Enables/Disables CLK0 output buffer and crystal oscillator circuitry CLK1 – Second clock output
V _{DD}	V _{DD} connection
XIN	Crystal input pad
XOUT	Crystal output pad

3.0 MEASUREMENT TEST CIRCUITS (MTC)

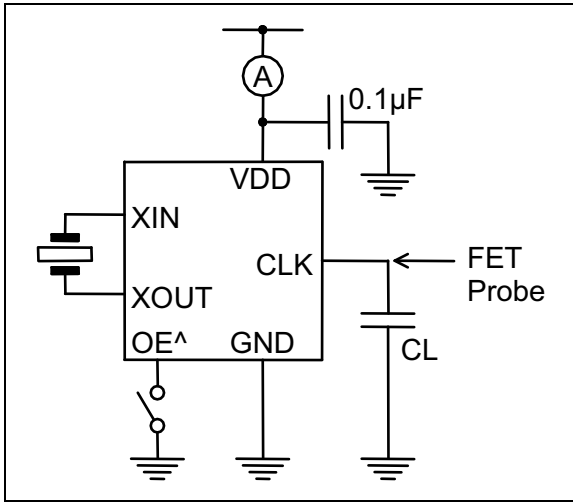


FIGURE 3-1: MTC-1: Rise Time, Fall Time, Duty Cycle, V_{OL} , V_{OH} , I_{DD} , Power Down Current, Output Enable/Disable.

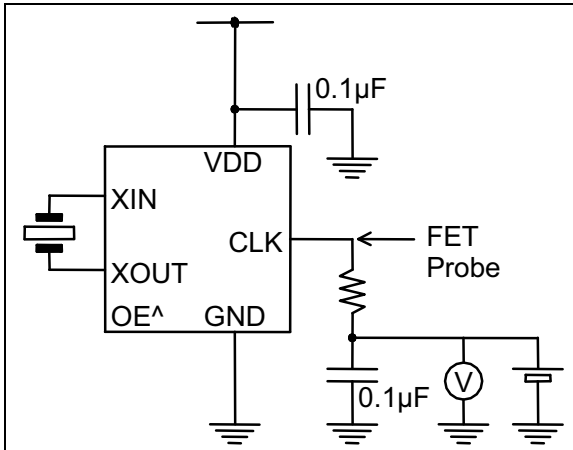


FIGURE 3-2: MTC-2: Output Drive Current and Output Impedance.

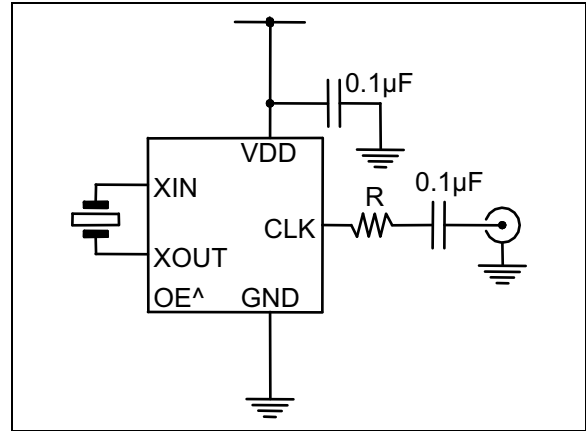


FIGURE 3-3: MTC-3: Jitter and Phase Noise.

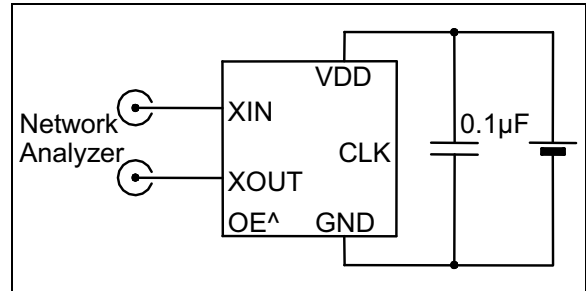


FIGURE 3-4: MTC-4: Negative Resistance.

4.0 WAVEFORM SWITCHING CHARACTERISTICS

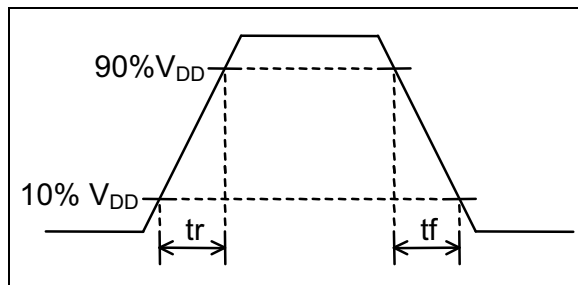


FIGURE 4-1: Rise and Fall Times.

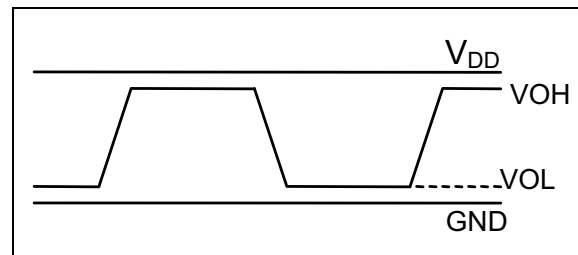


FIGURE 4-2: V_{OH} , V_{OL} .

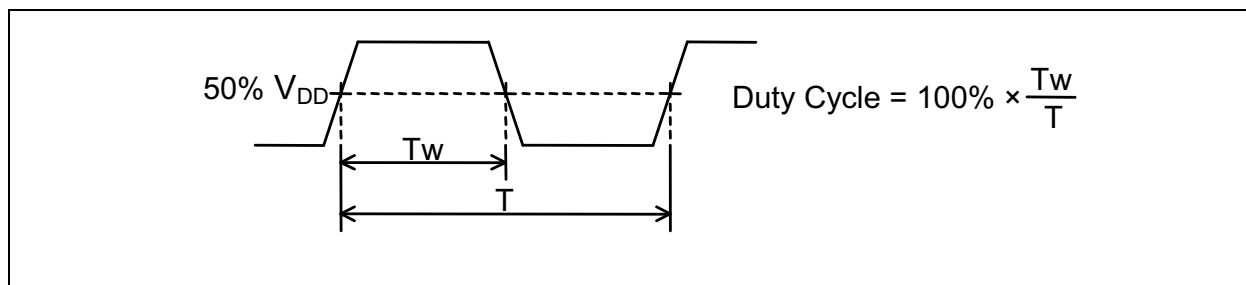


FIGURE 4-3: Duty Cycle.

APPENDIX A: REVISION HISTORY

Revision A (August 2016)

- Converted Micrel document PL610-01/-02/-03 to Microchip data sheet DS20005616A.
- Minor text changes throughout.

NOTES:

PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

<u>PART NO.</u>		X	X	X	X
Device		Package	Thickness	Temperature	Media Type
Device:	PL610-01:	1.8V to 3.3V Single IC XO with Frequency Tuning (10 MHz to 130 MHz)			
	PL610-02:	1.8V to 3.3V Single IC XO with Frequency Tuning (10 MHz to 130 MHz)			
	PL610-03:	1.8V to 3.3V Single IC XO with Frequency Tuning (10 MHz to 130 MHz)			
Package:	D =	Die			
	E =	Die (with non-conductive backcoating)			
	V =	Wafer (with non-conductive backcoating)			
	W =	Wafer			
Thickness:	6 =	6 mm (Die Only)			
	8 =	8 mm			
	A =	10 mm			
	none =	12 mm			
Temperature:	C =	0°C to +70°C (Commercial)			
Media Type:	none =	Tray			

Examples:	
a) PL610-01D6C:	1.8V to 3.3V Single IC XO with Frequency Tuning, Die, 6 mm Thickness, Commercial Temp. Range, Tray
b) PL610-02E8C:	1.8V to 3.3V Single IC XO with Frequency Tuning, Die (non-conductive back), 8 mm Thickness, Commercial Temp. Range, Tray
c) PL610-03VAC:	1.8V to 3.3V Single IC XO with Frequency Tuning, Wafer (non-conductive back), 10 mm Thickness, Commercial Temp. Range, Tray
d) PL610-01WC:	1.8V to 3.3V Single IC XO with Frequency Tuning, Wafer, 12 mm Thickness, Commercial Temp. Range, Tray
e) PL610-02W8C:	1.8V to 3.3V Single IC XO with Frequency Tuning, Wafer, 8 mm Thickness, Commercial Temp. Range, Tray
f) PL610-03DAC:	1.8V to 3.3V Single IC XO with Frequency Tuning, Die, 10 mm Thickness, Commercial Temp. Range, Tray
g) PL610-02E6C:	1.8V to 3.3V Single IC XO with Frequency Tuning, Die (non-conductive back), 6 mm Thickness, Commercial Temp. Range, Tray
h) PL610-01VC:	1.8V to 3.3V Single IC XO with Frequency Tuning, Wafer (non-conductive back), 12 mm Thickness, Commercial Temp. Range, Tray

NOTES:

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELoQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
== ISO/TS 16949 ==

Trademarks

The Microchip name and logo, the Microchip logo, AnyRate, dsPIC, FlashFlex, flexPWR, Helder, JukeBlox, KeeLoq, KeeLoq logo, Klear, LANCheck, LINK MD, MediaLB, MOST, MOST logo, MPLAB, OptoLyzer, PIC, PICSTART, PIC32 logo, RightTouch, SpyNIC, SST, SST Logo, SuperFlash and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

ClockWorks, The Embedded Control Solutions Company, ETHERSYNCH, Hyper Speed Control, HyperLight Load, IntelliMOS, mTouch, Precision Edge, and QUIET-WIRE are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BodyCom, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, JitterBlocker, KlearNet, KlearNet logo, MiWi, motorBench, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PureSilicon, RightTouch logo, REAL ICE, Ripple Blocker, Serial Quad I/O, SQL, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademarks of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2016, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 978-1-5224-0877-2

Worldwide Sales and Service

AMERICAS

Corporate Office
 2355 West Chandler Blvd.
 Chandler, AZ 85224-6199
 Tel: 480-792-7200
 Fax: 480-792-7277
 Technical Support:
<http://www.microchip.com/support>
 Web Address:
www.microchip.com

Atlanta
 Duluth, GA
 Tel: 678-957-9614
 Fax: 678-957-1455

Austin, TX
 Tel: 512-257-3370

Boston
 Westborough, MA
 Tel: 774-760-0087
 Fax: 774-760-0088

Chicago
 Itasca, IL
 Tel: 630-285-0071
 Fax: 630-285-0075

Cleveland
 Independence, OH
 Tel: 216-447-0464
 Fax: 216-447-0643

Dallas
 Addison, TX
 Tel: 972-818-7423
 Fax: 972-818-2924

Detroit
 Novi, MI
 Tel: 248-848-4000

Houston, TX
 Tel: 281-894-5983

Indianapolis
 Noblesville, IN
 Tel: 317-773-8323
 Fax: 317-773-5453

Los Angeles
 Mission Viejo, CA
 Tel: 949-462-9523
 Fax: 949-462-9608

New York, NY
 Tel: 631-435-6000

San Jose, CA
 Tel: 408-735-9110

Canada - Toronto
 Tel: 905-695-1980
 Fax: 905-695-2078

ASIA/PACIFIC

Asia Pacific Office
 Suites 3707-14, 37th Floor
 Tower 6, The Gateway
 Harbour City, Kowloon

Hong Kong
 Tel: 852-2943-5100
 Fax: 852-2401-3431

Australia - Sydney
 Tel: 61-2-9868-6733
 Fax: 61-2-9868-6755

China - Beijing
 Tel: 86-10-8569-7000
 Fax: 86-10-8528-2104

China - Chengdu
 Tel: 86-28-8665-5511
 Fax: 86-28-8665-7889

China - Chongqing
 Tel: 86-23-8980-9588
 Fax: 86-23-8980-9500

China - Dongguan
 Tel: 86-769-8702-9880

China - Guangzhou
 Tel: 86-20-8755-8029

China - Hangzhou
 Tel: 86-571-8792-8115
 Fax: 86-571-8792-8116

China - Hong Kong SAR
 Tel: 852-2943-5100
 Fax: 852-2401-3431

China - Nanjing
 Tel: 86-25-8473-2460
 Fax: 86-25-8473-2470

China - Qingdao
 Tel: 86-532-8502-7355
 Fax: 86-532-8502-7205

China - Shanghai
 Tel: 86-21-5407-5533
 Fax: 86-21-5407-5066

China - Shenyang
 Tel: 86-24-2334-2829
 Fax: 86-24-2334-2393

China - Shenzhen
 Tel: 86-755-8864-2200
 Fax: 86-755-8203-1760

China - Wuhan
 Tel: 86-27-5980-5300
 Fax: 86-27-5980-5118

China - Xian
 Tel: 86-29-8833-7252
 Fax: 86-29-8833-7256

ASIA/PACIFIC

China - Xiamen
 Tel: 86-592-2388138
 Fax: 86-592-2388130

China - Zhuhai
 Tel: 86-756-3210040
 Fax: 86-756-3210049

India - Bangalore
 Tel: 91-80-3090-4444
 Fax: 91-80-3090-4123

India - New Delhi
 Tel: 91-11-4160-8631
 Fax: 91-11-4160-8632

India - Pune
 Tel: 91-20-3019-1500

Japan - Osaka
 Tel: 81-6-6152-7160
 Fax: 81-6-6152-9310

Japan - Tokyo
 Tel: 81-3-6880-3770
 Fax: 81-3-6880-3771

Korea - Daegu
 Tel: 82-53-744-4301
 Fax: 82-53-744-4302

Korea - Seoul
 Tel: 82-2-554-7200
 Fax: 82-2-558-5932 or
 82-2-558-5934

Malaysia - Kuala Lumpur
 Tel: 60-3-6201-9857
 Fax: 60-3-6201-9859

Malaysia - Penang
 Tel: 60-4-227-8870
 Fax: 60-4-227-4068

Philippines - Manila
 Tel: 63-2-634-9065
 Fax: 63-2-634-9069

Singapore
 Tel: 65-6334-8870
 Fax: 65-6334-8850

Taiwan - Hsin Chu
 Tel: 886-3-5778-366
 Fax: 886-3-5770-955

Taiwan - Kaohsiung
 Tel: 886-7-213-7828

Taiwan - Taipei
 Tel: 886-2-2508-8600
 Fax: 886-2-2508-0102

Thailand - Bangkok
 Tel: 66-2-694-1351
 Fax: 66-2-694-1350

EUROPE

Austria - Wels
 Tel: 43-7242-2244-39
 Fax: 43-7242-2244-393

Denmark - Copenhagen
 Tel: 45-4450-2828
 Fax: 45-4485-2829

France - Paris
 Tel: 33-1-69-53-63-20
 Fax: 33-1-69-30-90-79

Germany - Dusseldorf
 Tel: 49-2129-3766400

Germany - Karlsruhe
 Tel: 49-721-625370

Germany - Munich
 Tel: 49-89-627-144-0
 Fax: 49-89-627-144-44

Italy - Milan
 Tel: 39-0331-742611
 Fax: 39-0331-466781

Italy - Venice
 Tel: 39-049-7625286

Netherlands - Drunen
 Tel: 31-416-690399
 Fax: 31-416-690340

Poland - Warsaw
 Tel: 48-22-3325737

Spain - Madrid
 Tel: 34-91-708-08-90
 Fax: 34-91-708-08-91

Sweden - Stockholm
 Tel: 46-8-5090-4654

UK - Wokingham
 Tel: 44-118-921-5800
 Fax: 44-118-921-5820