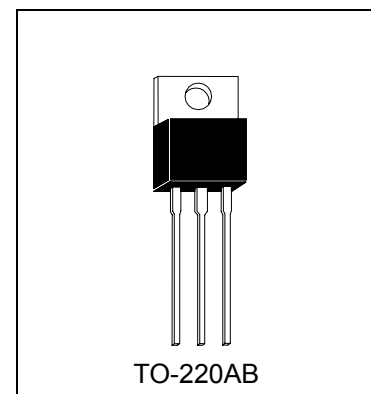


**3-TERMINAL POSITIVE VOLTAGE REGULATOR**

# PL7818XE3



**Description**

The PL7818XE3 series of three-terminal positive regulators are available in the TO-220AB package. These regulators can provide local on-card regulation, eliminating the distribution problems associated with single point regulation. Each employs internal current limiting, thermal shutdown and safe operating area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 1A output current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.


PL7818XE3 is characterized for operation from 0°C to +125°C, and if operating temperature is always high, please refer to the power dissipation curve.

**Absolute Maximum Ratings** (Ta=25°C)

- Input Voltage ..... 35 V
- Total Power Dissipation ..... Internally limited
- Operating Temperature Range ..... 0 °C to +125 °C
- Maximum Junction Temperature ..... 125 °C
- Storage Temperature Range ..... -55 °C to +150 °C
- Lead Temperature (Soldering 10S) ..... 230 °C

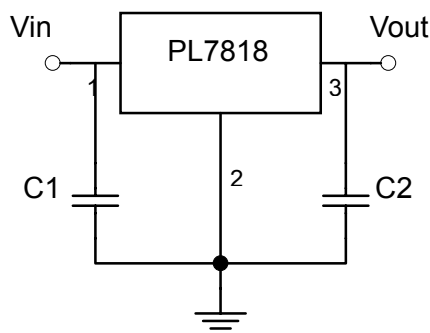**Typical Application**

**Note:**

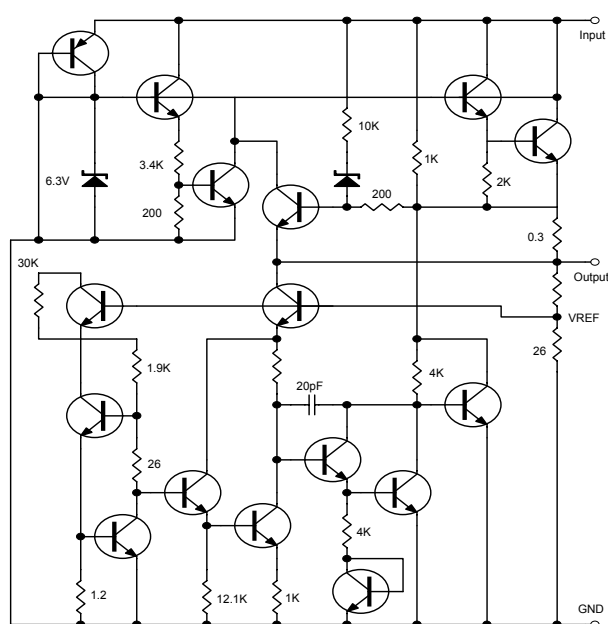C1 and C2 are required if regulator is located far from power supply filter and load, or oscillation may induced on the loop.

**Schematic Diagram**




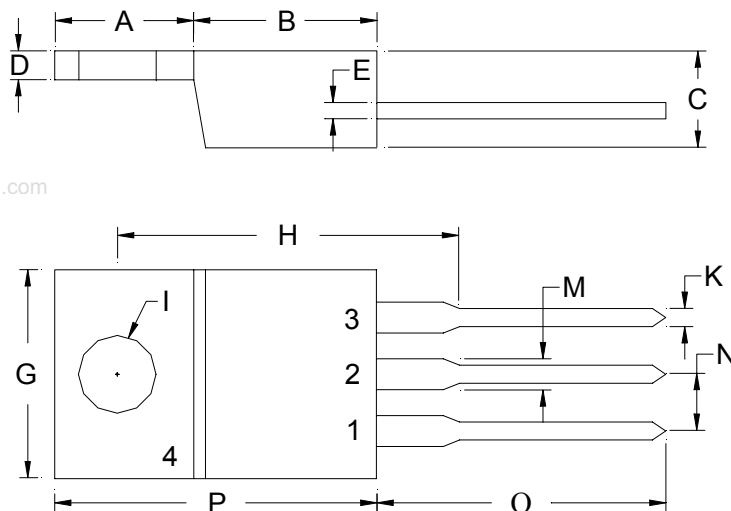
## Electrical Characteristics

$V_{in}=27V$ ,  $I_o=500mA$ ,  $0^{\circ}C \leq T_j \leq 125^{\circ}C$  (unless otherwise noted)


| Symbol                  | Parameter                  | Conditions                                           | PL7818A |     |       | Units          |
|-------------------------|----------------------------|------------------------------------------------------|---------|-----|-------|----------------|
|                         |                            |                                                      | Min     | Typ | Max   |                |
| $V_o$                   | Output Voltage             | $T_j=25^{\circ}C$                                    | 17.46   | 18  | 18.54 | V              |
|                         |                            | $PD \leq 15W$ , $5mA \leq I_o \leq 1A$               | 17.46   | 18  | 18.54 |                |
| $\Delta V_o$            | Line Regulation            | $T_j=25^{\circ}C$ , $21V \leq V_{in} \leq 33V$       | -       | 15  | 360   | mV             |
|                         |                            | $T_j=25^{\circ}C$ , $24V \leq V_{in} \leq 30V$       | -       | -   | 180   |                |
| $\Delta V_o$            | Load Regulation            | $5mA \leq I_o \leq 1.5A$                             | -       | -   | 360   | mV             |
|                         |                            | $250mA \leq I_o \leq 750mA$                          | -       | 5   | 180   |                |
| $I_Q$                   | Quiescent Current          | $I_o \leq 1A$ , $T_j=25^{\circ}C$                    | -       | 5.5 | 8     | mA             |
| $\Delta I_Q$            | Quiescent Current Change   | $5mA \leq I_o \leq 1A$                               | -       | -   | 0.5   | mA             |
|                         |                            | $21V \leq V_{in} \leq 33V$                           | -       | -   | 1.3   |                |
| $V_n$                   | Output Noise Voltage       | $T_a=25^{\circ}C$ , $10Hz \leq f \leq 100KHz$        | -       | 110 | -     | $\mu V$        |
| $RR$                    | Ripple Rejection           | $28V \leq V_{in} \leq 38V$ , $f=120Hz$               | 53      | 69  | -     | dB             |
| $VD$                    | Dropout Voltage            | $T_j=25^{\circ}C$ , $I_o=1A$                         | -       | 2   | -     | V              |
| $I_{sc}$                | Short Circuit Current      | $T_j=25^{\circ}C$ , $V_i=35V$                        | -       | 1.5 | -     | A              |
| $I_{pk}$                | Peak Output Current        | $T_j=25^{\circ}C$                                    | 1.7     | -   | -     | A              |
| $\Delta V_o / \Delta T$ | Average $T_c$ of $V_{out}$ | $0^{\circ}C \leq T_j \leq +125^{\circ}C$ , $I_o=5mA$ | -       | -1  | -     | $mV/^{\circ}C$ |

| Symbol                  | Parameter                  | Conditions                                           | PL7818B |     |       | Units          |
|-------------------------|----------------------------|------------------------------------------------------|---------|-----|-------|----------------|
|                         |                            |                                                      | Min     | Typ | Max   |                |
| $V_o$                   | Output Voltage             | $T_j=25^{\circ}C$                                    | 17.28   | 18  | 18.72 | V              |
|                         |                            | $PD \leq 15W$ , $5mA \leq I_o \leq 1A$               | 17.1    | 18  | 18.9  |                |
| $\Delta V_o$            | Line Regulation            | $T_j=25^{\circ}C$ , $21V \leq V_{in} \leq 33V$       | -       | 15  | 360   | mV             |
|                         |                            | $T_j=25^{\circ}C$ , $24V \leq V_{in} \leq 30V$       | -       | -   | 180   |                |
| $\Delta V_o$            | Load Regulation            | $5mA \leq I_o \leq 1.5A$                             | -       | -   | 360   | mV             |
|                         |                            | $250mA \leq I_o \leq 750mA$                          | -       | 5   | 180   |                |
| $I_Q$                   | Quiescent Current          | $I_o \leq 1A$ , $T_j=25^{\circ}C$                    | -       | 5.5 | 8     | mA             |
| $\Delta I_Q$            | Quiescent Current Change   | $5mA \leq I_o \leq 1A$                               | -       | -   | 0.5   | mA             |
|                         |                            | $21V \leq V_{in} \leq 33V$                           | -       | -   | 1.3   |                |
| $V_n$                   | Output Noise Voltage       | $T_a=25^{\circ}C$ , $10Hz \leq f \leq 100KHz$        | -       | 110 | -     | $\mu V$        |
| $RR$                    | Ripple Rejection           | $28V \leq V_{in} \leq 38V$ , $f=120Hz$               | 53      | 69  | -     | dB             |
| $VD$                    | Dropout Voltage            | $T_j=25^{\circ}C$ , $I_o=1A$                         | -       | 2.5 | -     | V              |
| $I_{sc}$                | Short Circuit Current      | $T_j=25^{\circ}C$ , $V_i=35V$                        | -       | 1.5 | -     | A              |
| $I_{pk}$                | Peak Output Current        | $T_j=25^{\circ}C$                                    | 1.7     | -   | -     | A              |
| $\Delta V_o / \Delta T$ | Average $T_c$ of $V_{out}$ | $0^{\circ}C \leq T_j \leq +125^{\circ}C$ , $I_o=5mA$ | -       | -1  | -     | $mV/^{\circ}C$ |

## TO-220AB Dimension



Marking:



Style: Pin 1.Vin 2.Ground 3.Vout  
 4.Ground

3-Lead TO-220AB Plastic Package  
 CYStek Package Code: E3

\*: Typical

| DIM | Inches |         | Millimeters |        | DIM | Inches |         | Millimeters |       |
|-----|--------|---------|-------------|--------|-----|--------|---------|-------------|-------|
|     | Min.   | Max.    | Min.        | Max.   |     | Min.   | Max.    | Min.        | Max.  |
| A   | 0.2197 | 0.2949  | 5.58        | 7.49   | I   | -      | *0.1508 | -           | *3.83 |
| B   | 0.3299 | 0.3504  | 8.38        | 8.90   | K   | 0.0295 | 0.0374  | 0.75        | 0.95  |
| C   | 0.1732 | 0.185   | 4.40        | 4.70   | M   | 0.0449 | 0.0551  | 1.14        | 1.40  |
| D   | 0.0453 | 0.0547  | 1.15        | 1.39   | N   | -      | *0.1000 | -           | *2.54 |
| E   | 0.0138 | 0.0236  | 0.35        | 0.60   | O   | 0.5000 | 0.5618  | 12.70       | 14.27 |
| G   | 0.3803 | 0.4047  | 9.66        | 10.28  | P   | 0.5701 | 0.6248  | 14.48       | 15.87 |
| H   | -      | *0.6398 | -           | *16.25 |     |        |         |             |       |

Notes: 1.Controlling dimension: millimeters.

2.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.

3.If there is any question with packing specification or packing method, please contact your local CYStek sales office.

### Material:

- Lead: 42 Alloy ; solder plating
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0

### Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.