

*Version : 2.0*

**TECHNICAL SPECIFICATION**

**MODEL NO : PM102ZY2**

The content of this information is subject to be changed without notice.  
Please contact PVI or its agent for further information.

Customer's Confirmation


Customer \_\_\_\_\_

Date \_\_\_\_\_

By \_\_\_\_\_

PVI's Confirmation

  
Confirmed By \_\_\_\_\_

  
Prepared By \_\_\_\_\_

## *Revision History*

<b>Rev.</b>	<b>Eng.</b>	<b>Issued Date</b>	<b>Revised Content</b>
0.1	黃秀晶	Apr 10, 2007	Preliminary
0.2	黃秀晶	May 08, 2007	Add Page21 13. Optical Characteristics Brightness(Typ.=350nit)
1.0	黃秀晶	June 04, 2007	Add Page11 7.Electrical Characteristics Page 21 13. Optical Characteristics
2.0	黃秀晶	Aug 09, 2007	Modify Page10 Note 5-14: R1 from 0Ω to OPEN

---

***TECHNICAL SPECIFICATION***  
***CONTENTS***

<b><i>NO.</i></b>	<b><i>ITEM</i></b>	<b><i>PAGE</i></b>
-	Cover	1
-	Revision History	2
-	Contents	3
1	Application	4
2	Features	4
3	Mechanical Specifications	4
4	Mechanical Drawing of TFT-LCD module	5
5	Input / Output Terminals	7
6	Absolute Maximum Ratings	11
7	Electrical Characteristics	11
8	Pixel Arrangement	12
9	Display Color and Gray Scale Reference	13
10	Block Diagram	14
11	Interface Timing	15
12	Power On Sequence	21
13	Optical Characteristics	21
14	Handling Cautions	24
15	Reliability Test	25
16	Packing Diagram	26

1. Application

This data sheet applies to a color TFT LCD module, PM102ZY2. This module applies to OA product, computer peripheral, industrial meter, image communication and multi-media. If you must use in severe reliability environment, please don't extend over PVI's reliability test conditions.


2. Features


- . Amorphous silicon TFT-LCD panel with Backlight unit.
- . WSVGA (1024\*600 pixels) resolution
- . Pixel in stripe configuration
- . Slim and compact, designed for O/A application
- . Display Colors : 262,144 colors
- . Support TTL/RSDS interface

3. Mechanical Specifications

Parameter	Specifications	Unit
Screen Size	10.2" (diagonal)	inch
Display Format	1024 X(RGB) X600	dot
Display Colors	262,144	
Active Area	222.72(H) X30.5(V)	mm
Pixel Pitch	0.2175(H) X0.2175(V)	mm
Pixel Configuration	Stripe	
Outline Dimension	235.0(W) X45.8(H) X6.2(D) (typ.)	mm
Weight	313±15	g
Surface treatment	Anti-Glare and E/Wide View Film	
Display mode	Normally white	
Gray scale inversion direction	6 (ref to Page 20 viewing angle )	o'clock

4. Mechanical Drawing of TFT-LCD Module

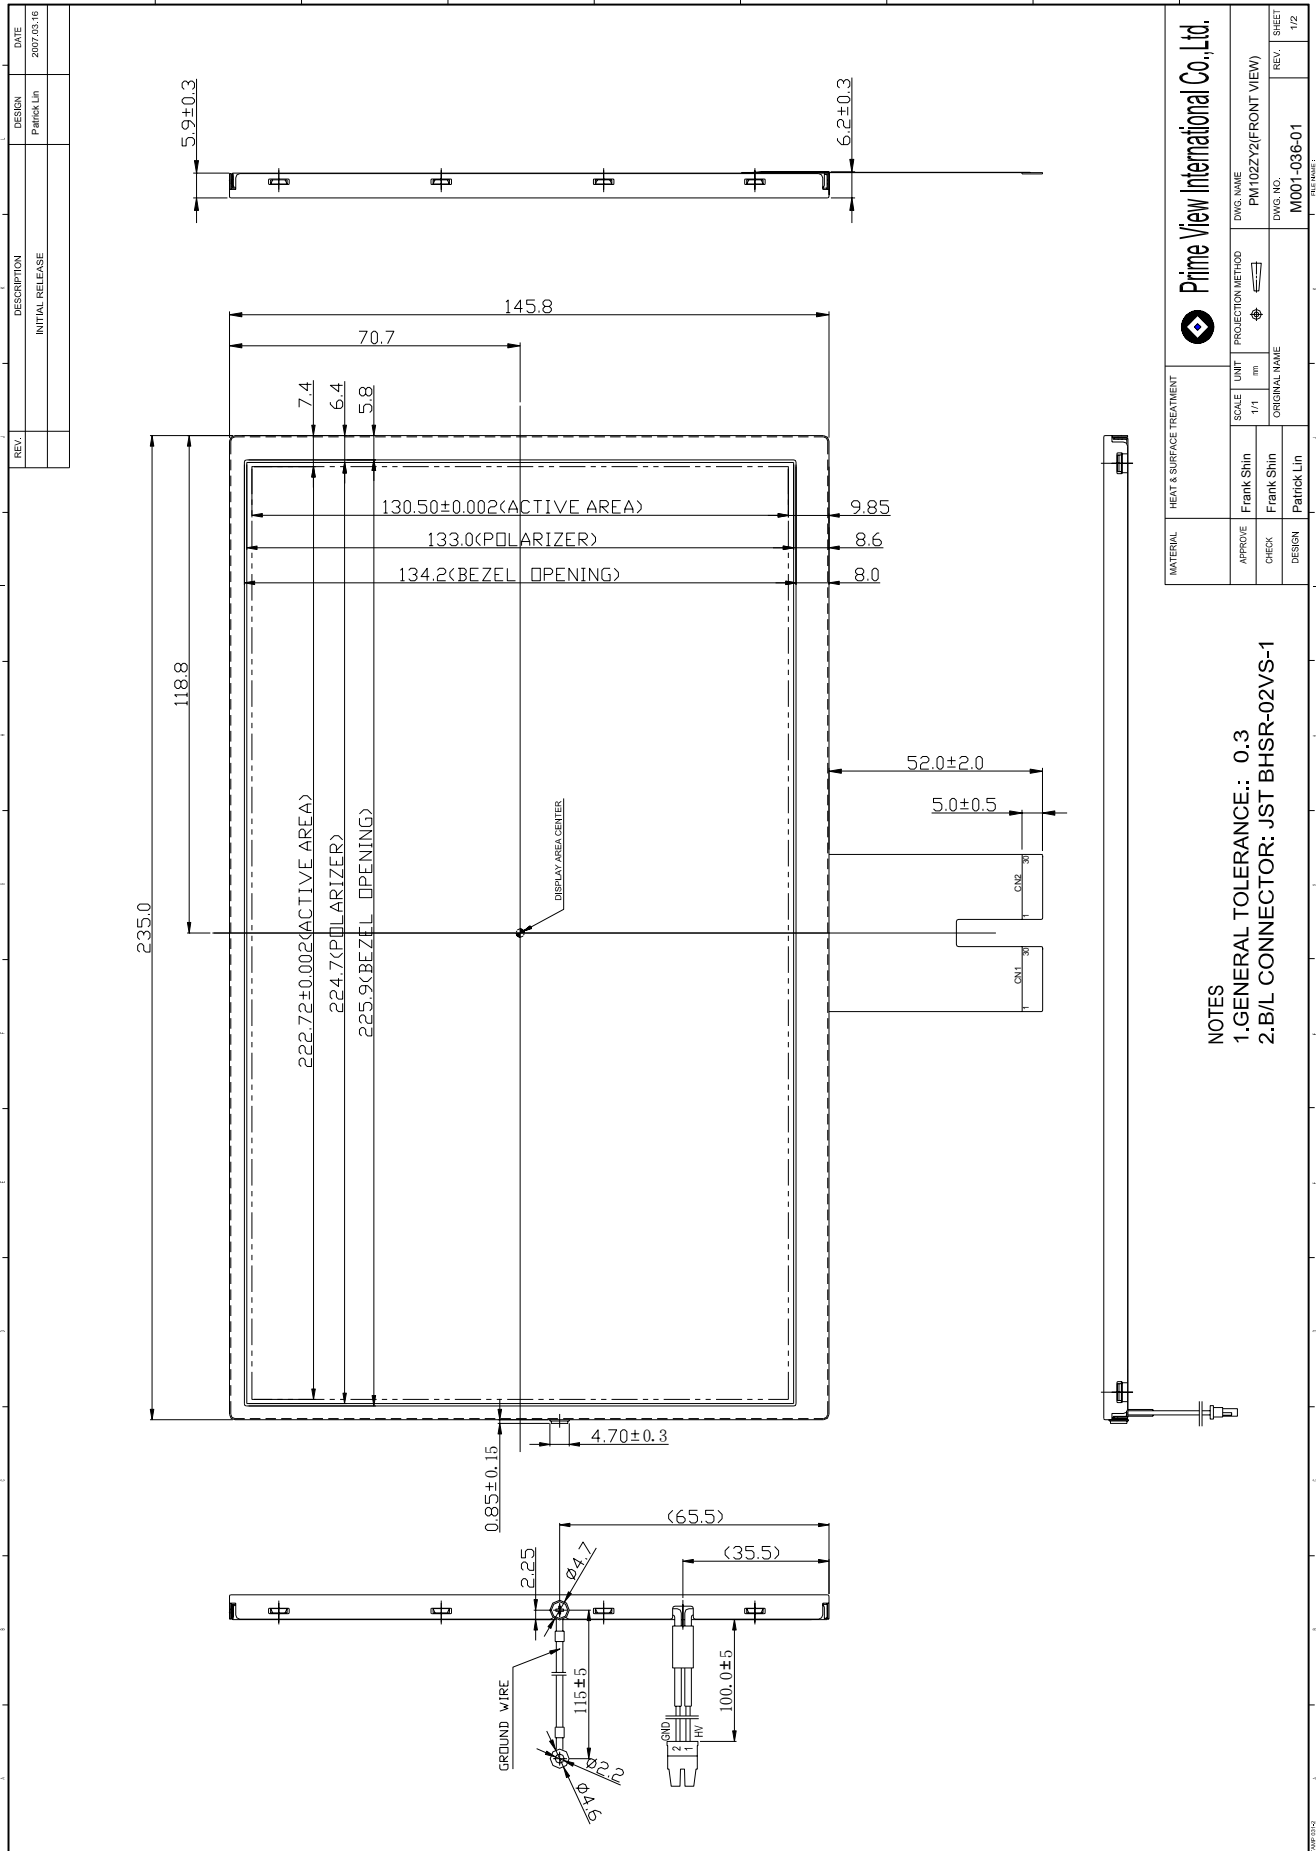

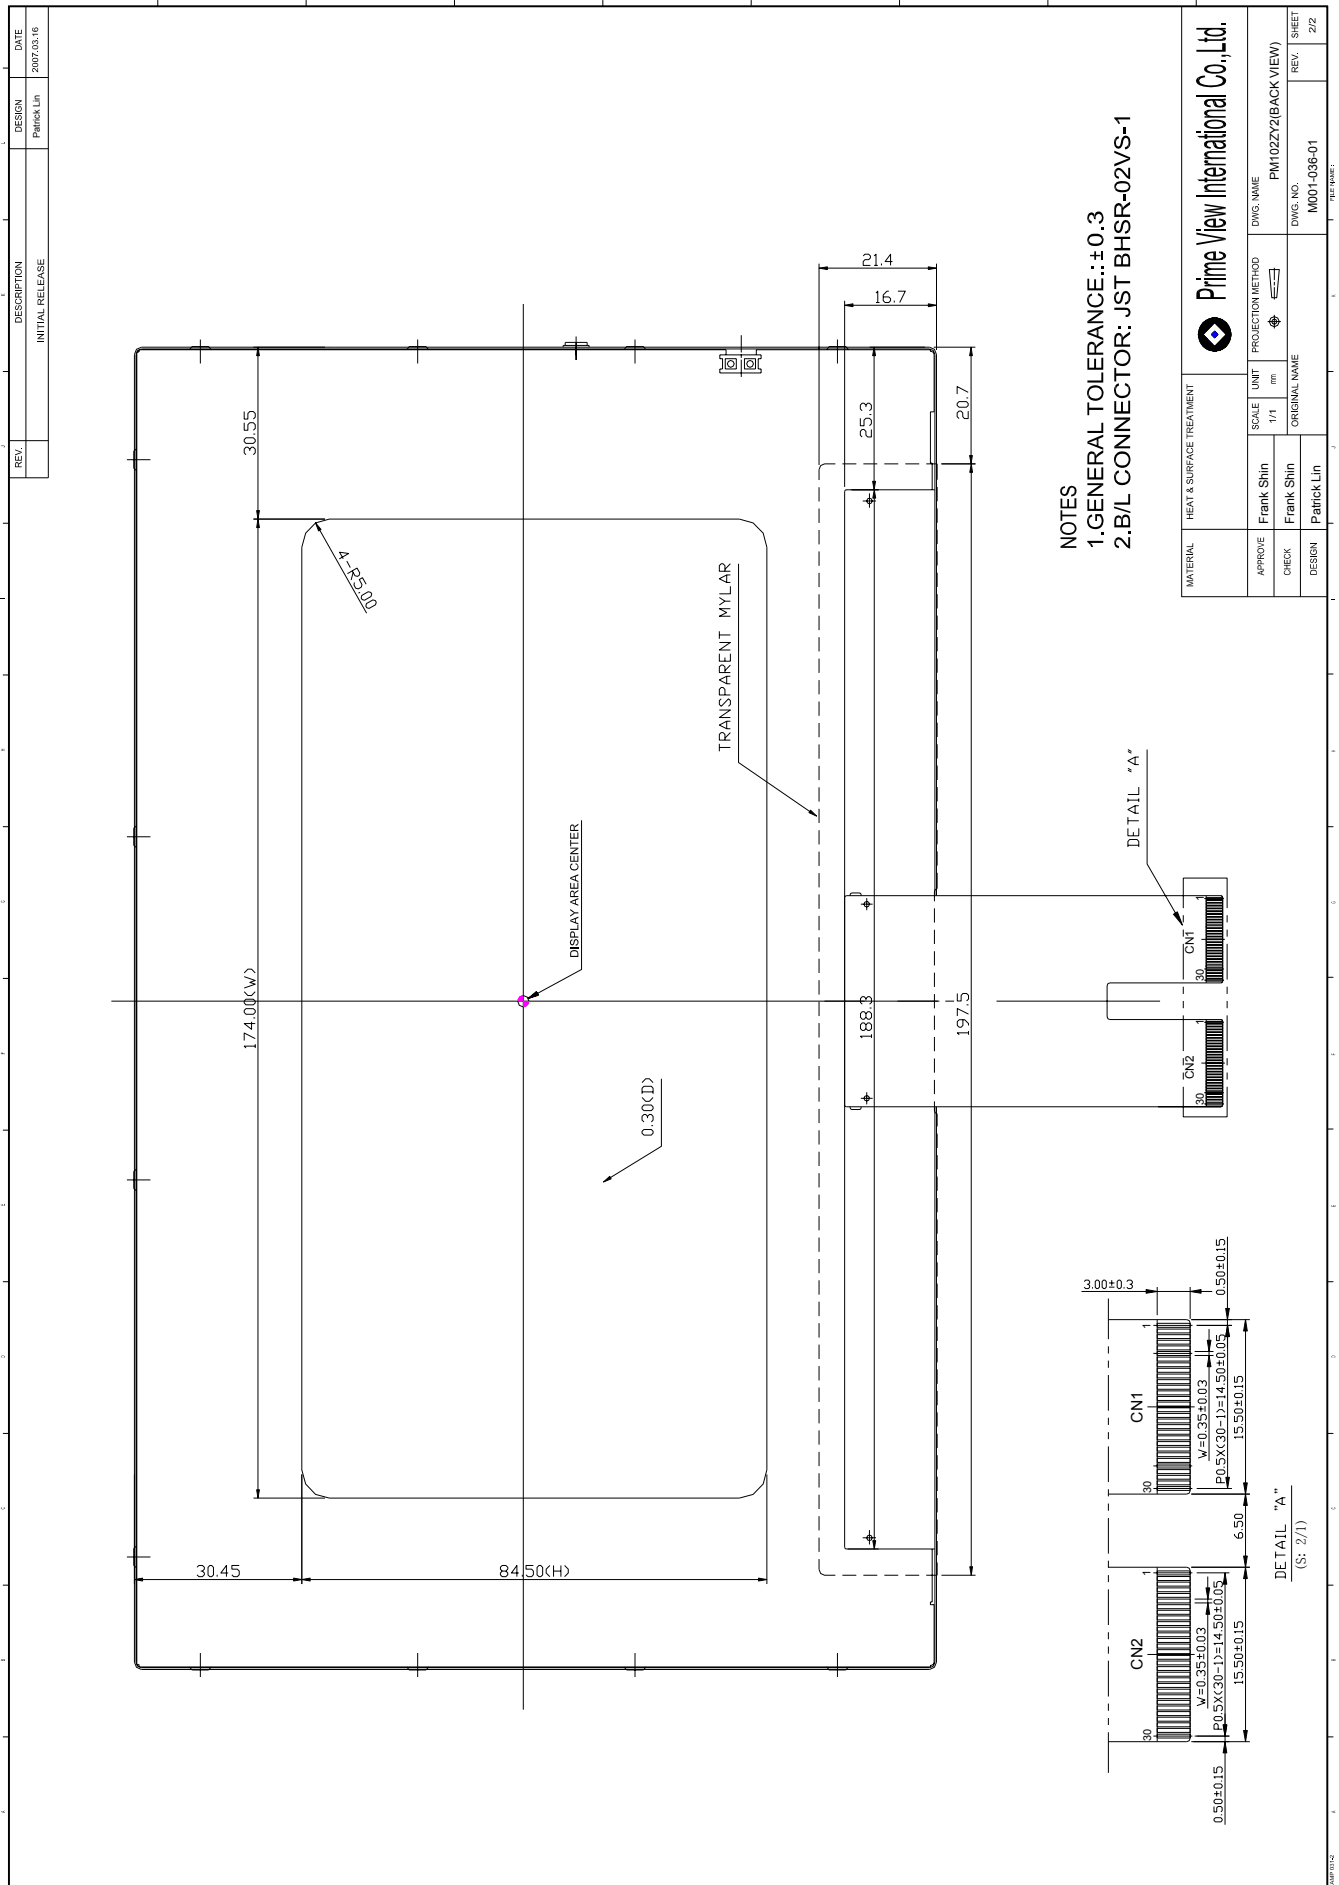

5. Input / Output Terminals

5-1) TFT-LCD Panel Driving

FPC Down Connect, 30 Pins, Pitch: 0.5 mm

CN 1

Pin No.	Symbol	I/O	Function	Remark
1	DIO1	I/O	Horizontal Start Pulse Signal Input or Output	Note 5-6
2	VSS1	I	Ground	
3	VDD1	I	Power Supply	
4	CLK	I	Shift Clock input	Note 5-10
5	CLKN	I	RSDS Shift Clock input	Note 5-11
6	R/L	I	Right / Left selection	Note 5-6
7	R0(D00)	I	Red Data (LSB)	Note 5-13
8	R1(D01)	I	Red Data	
9	R2(D02)	I	Red Data	
10	R3(D03)	I	Red Data	
11	R4(D04)	I	Red Data	
12	R5(D05)	I	Red Data (MSB)	
13	VSS1	I	Ground	
14	G0(D10)	I	Green Data (LSB)	Note 5-13
15	G1(D11)	I	Green Data	
16	G2(D12)	I	Green Data	
17	G3(D13)	I	Green Data	
18	G4(D14)	I	Green Data	
19	G5(D15)	I	Green Data (MSB)	
20	VSS1	I	Ground	
21	B0(D20)	I	Blue Data (LSB)	Note 5-13
22	B1(D21)	I	Blue Data	
23	B2(D22)	I	Blue Data	
24	B3(D23)	I	Blue Data	
25	B4(D24)	I	Blue Data	
26	B5(D25)	I	Blue Data (MSB)	
27	LD	I	Load output signal	Note 5-7
28	REV	I	Data invert control	Note 5-8
29	POL	I	Polarity selection	Note 5-9
30	DIO2	I/O	Horizontal Start Pulse Signal Input or Output	Note 5-6

CN 2

Pin No.	Symbol	I/O	Function	Remark
1	VSS2	I	Ground	
2	V1	I	Gamma Voltage 1	Note 5-14
3	V2	I	Gamma Voltage 2	
4	V3	I	Gamma Voltage 3	
5	V4	I	Gamma Voltage 4	
6	V5	I	Gamma Voltage 5	
7	V6	I	Gamma Voltage 6	
8	V7	I	Gamma Voltage 7	
9	VSS2	I	Ground	
10	V8	I	Gamma Voltage 8	Note 5-14
11	V9	I	Gamma Voltage 9	
12	V10	I	Gamma Voltage 10	
13	V11	I	Gamma Voltage 11	
14	V12	I	Gamma Voltage 12	
15	V13	I	Gamma Voltage 13	
16	V14	I	Gamma Voltage 14	
17	VSS2	I	Ground	
18	VDD2	I	Voltage for analog circuit	Note 5-14
19	VCOM	I	Common Voltage	
20	TTL/RSDS	I	TTL / RSDS Input mode Selection	Note 5-12
21	OE	I	Output Enable	Note 5-5
22	U/D	I	Up / Down Selection	Note 5-3
23	CKV	I	Vertical Shift Clock	Note 5-4
24	STVU	I/O	Vertical Shift Pulse Signal Input or Output	Note 5-3
25	STVD	I/O	Vertical Shift Pulse Signal Input or Output	
26	VGG	I	Gate On Voltage	Note 5-2
27	GND	I	Ground	
28	VCC	I	Voltage for logic circuit	
29	GND	I	Ground	
30	VEE	I	Gate Off Voltage	Note 5-1



Note 5-1: Gate off voltage, VEE=-5.6V

Note 5-2: Gate on voltage, VGG=17V

Note 5-3: Select up or down shift

U/D	STVU	STVD	Shift
1	Hi-Z	Input	Down to Up
0	Input	Hi-Z	Up to Down

Note 5-4: Gate driver shift clock

Note 5-5: When OE is connected to high “1”, the driver outputs are disabled (Gate output = VEE). Under this condition, the operation of registers will not be affected.

Note 5-6: Select left or right shift

R/L	DIO1	DIO2	Shift
1	Input	Hi-Z	Left to Right
0	Hi-Z	Input	Right to Left

Note 5-7: Latch the polarity of outputs and switch the new data to outputs. At the rising edge (LD), latch the “POL” signal to control the polarity of the outputs.

Note 5-8: Control whether the Data R0~G5 are inverted or not. (PVI suggests connecting to GND)  
 When “REV=1”, these data will be inverted.  
 EX: “00”→”3F”, “07”→”38”, “15”→”2A”


Note 5-9: Polarity selector for dot-inversion control. Available at the rising edge of LD.  
 When POL=1: Even outputs range from V1~V7, and Odd outputs range from V8~V14; When POL=0: Even outputs range from V8~V14, and Odd outputs range from V1~V7.

Note 5-10: Clock signal. When RSDS input mode, CLK is used as CLKP input pin.

Note 5-11: The RSDS clock input pairs generate the internal shift clock through the comparison between CLKP and CLKN. When TTL mode, connect to GND.

Note 5-12: TTL/RSDS=H: RSDS data input  
 TTL/RSDS=L or open: TTL data input


U/D CN2(PIN22)=0 R/L CN1(PIN6)=1 U/D CN2(PIN22)=1 R/L CN1(PIN6)=0

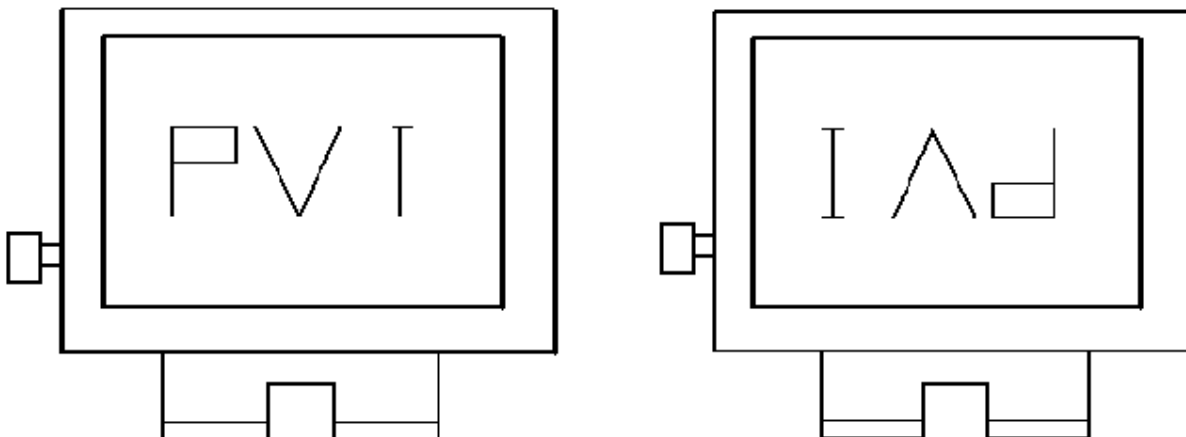

Note 5-13:

Pin name	RSDS input mode TTLRSDS = H	TTL input mode TTLRSDS = L
D04,D02,D00	D0[2:0]N	D04,D02,D00
D05,D03,D01	D0[2:0]P	D05,D03,D01
D14,D12,D10	D1[2:0]N	D14,D12,D10
D15,D13,D11	D1[2:0]P	D15,D13,D11
D24,D22,D20	D2[2:0]N	D24,D22,D20
D25,D23,D21	D2[2:0]P	D25,D23,D21

Note 5-14: Typical Application Circuit (When VDD2 = 9.1V)

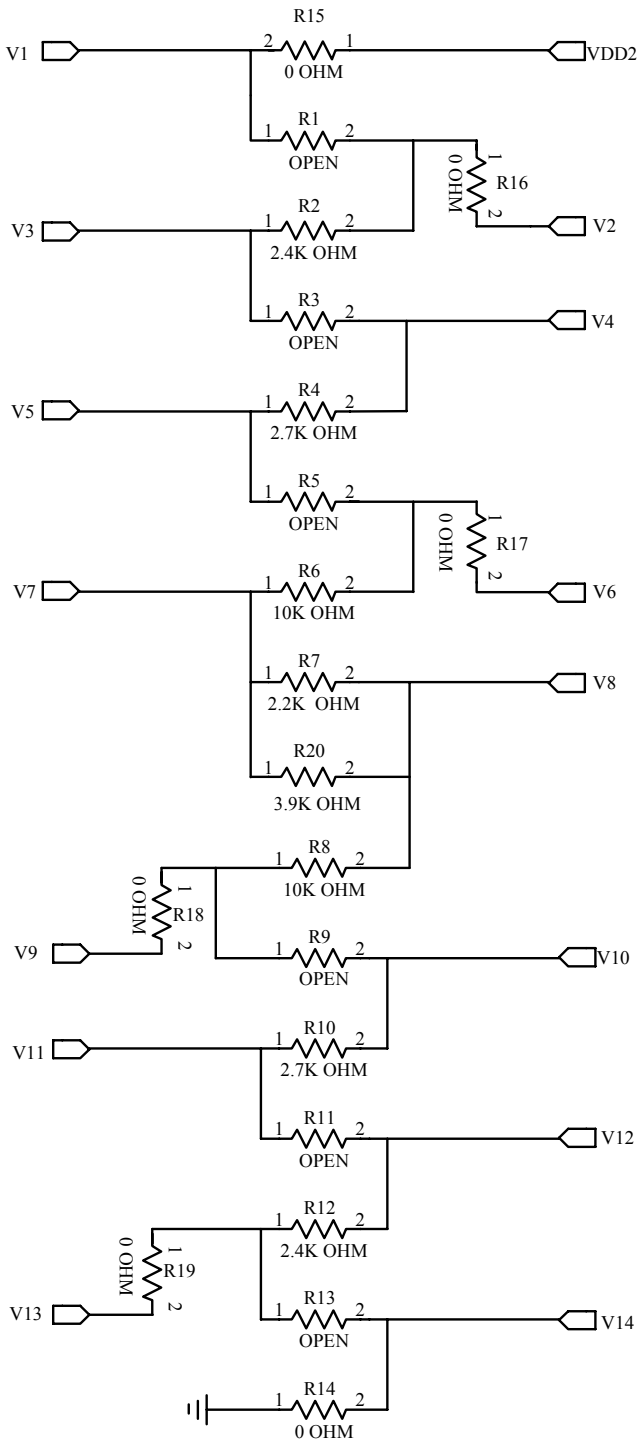

## 5-2) Backlight driving

Connector type: JST BHSR-02VS-1, PIN No 2 pins, pitch=3.5mm

Pin No	Symbol	Description	Remark
1	VL1	Input terminal (Hi voltage side)	Wire color : Pink
2	VL2	Input terminal (Low voltage side)	Wire color : White Note 5-15

Note 5-15: Low voltage side of backlight inverter connects with ground of inverter circuits.

## 6. Absolute Maximum Ratings:

 $V_{SS1}=V_{SS2}= GND=0V, T_a=25^{\circ}C$ 

Parameters	Symbol	MIN.	MAX.	Unit	Remark
Supply Voltage	VDD1	-0.5	5.0	V	
	VCC	-0.3	6.0	V	
	VDD2	-0.5	12.0	V	
	VGG	-0.3	40.0	V	
	VGG-VEE	-0.3	40.0	V	
	VEE	-20	0.3	V	

## 7. Electrical Characteristics

## 7-1) Recommended Operating Conditions :

 $V_{SS1}=V_{SS2}= GND =0V, T_a=25^{\circ}C$ 

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Supply Voltage for Source Driver	VDD1	3.0	3.3	3.6	V	
	VDD2	8.6	9.1	9.6	V	
Supply Voltage for Gate Driver	VGG	-	17	-	V	
	VEE	-	-5.6	-	V	
	VCC	3.0	3.3	3.6	V	
VCOM Voltage	VCOM	-	3.6	-	V	
Digital Input Voltage	$V_{IH}$	$0.7 V_{CC}$	-	$V_{CC}$	V	
	$V_{IL}$	0	-	$0.3 V_{CC}$	V	

## 7-2) Power Consumption

Parameter	Symbol	Condition	Typ.	Max.	Unit	Remark
Supply Current for Gate Driver (Hi level)	IGG	VGG= 17V	0.19	0.57	mA	
Supply Current for Gate Driver (Low level)	IEE	VEE=-5.6V	0.98	2.94	mA	
Supply Current for Source Driver (Digital)	IDD1	VDD1= 3.3V	8.36	16.72	mA	
Supply Current for Source Driver (Analog)	IDD2	VDD2= 9.1V	35.07	70.14	mA	
Supply Current for Gate Driver (Digital)	ICC	VCC= 3.3V	0.02	0.06	mA	
LCD Panel Power Consumption	-	-	355.5	719.8	mW	Note 7-1
Back Light Lamp Power Consumption	-	-	4.8	5.28	W	Note 7-2 $I_L=6mA$
Total Power Consumption	-	-	5.16	6.0	W	

Note 7-1: The power consumption for backlight is not included.

 Note 7-2: Back light lamp power consumption is calculated by  $I_L \times V_L$ .

7-3) Recommended Driving Condition for Back Light

Ta=25°C


Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Lamp Voltage	V <sub>L</sub>	720	800	880	V	I <sub>L</sub> =6mA
Lamp Current	I <sub>L</sub>	4	6	8	mA	Note 7-3
Lamp Frequency	P <sub>L</sub>	30	60	80	KHz	Note 7-4
Starting Voltage (25°C) (Reference Value)	V <sub>s</sub>	-	-	1270	Vrms	Note 7-5
Starting Voltage (0°C) (Reference Value)	V <sub>s</sub>	-	-	1650	Vrms	
Starting Voltage (-20°C) (Reference Value)	V <sub>s</sub>	-	-	1900	Vrms	

Note 7-3: In order to have proper operation of the B/L, no matter what kind of inverters, the output lamp current must be between Min. and Max. values to avoid the abnormal display image caused by B/L.

Note 7-4: The waveform of lamp driving voltage should be as close to a perfect sine wave as possible.

Note 7-5: The "Max of Starting off voltage" means the minimum voltage of inverter to turn on the CCFL, and it should be applied to the lamp for more than 1 second to start up. Otherwise the lamp may not be turned on.

8. Pixel Arrangement

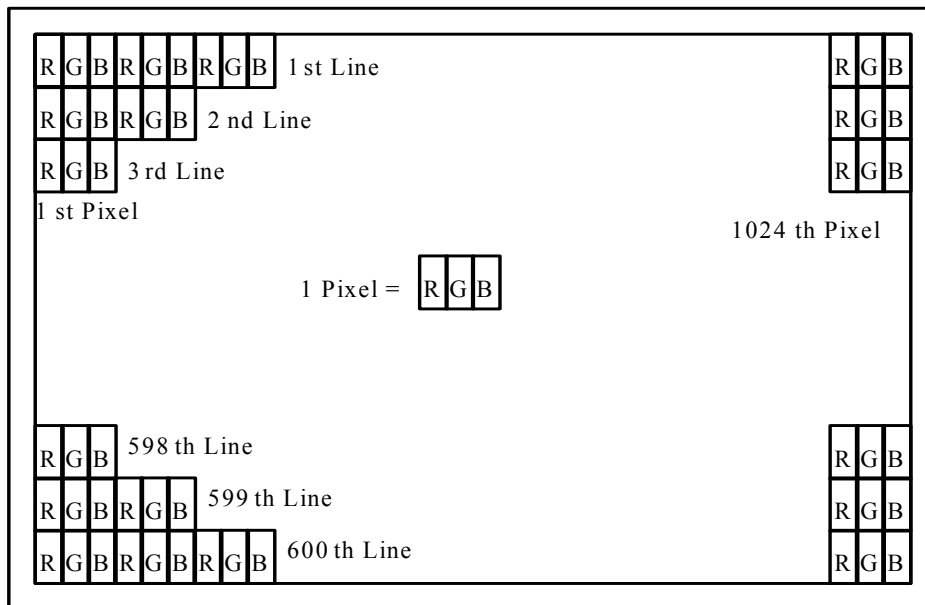


9. Display Color and Gray Scale Reference

Color		Input Color Data																	
		Red						Green						Blue					
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red	Red (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red (02)	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker																		
	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
	Brighter																		
	Red (61)	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red (62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
Red (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	
Green	Green (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green (01)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	Green (02)	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	Darker																		
	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
	Brighter																		
	Green (61)	0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0	0	0
	Green (62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
Green (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	
Blue	Blue (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue (01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue (02)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	Darker																		
	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
	Brighter																		
	Blue (61)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	1
	Blue (62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
Blue (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	

10. Block Diagram

10-1) TFT-module Block Diagram

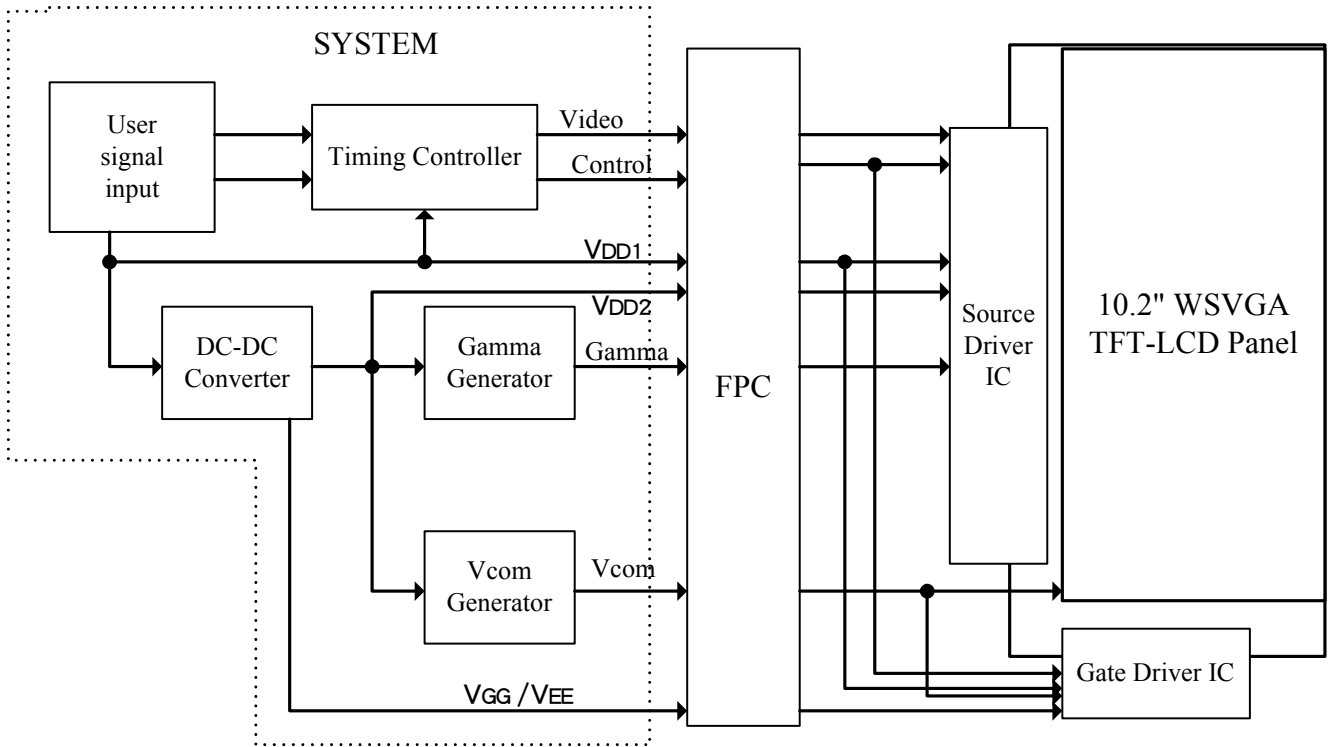

11. Interface Timing

11-1) Timing Parameters

AC Electrical Characteristics (VDD1=VCC=3.3V, VDD2=9.1V, GND=VSS1=VSS2=0V) Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
CLK Frequency	Fclk	-	50	55	MHz	
CLK Pulse Width	Tcw	18	-	-	ns	
Data Set-up Time	Tsu	4	-	-	ns	
Data Hold Time	Thd	2	-	-	ns	
Propagation Delay of DIO2/1	Tphl	6	10	15	ns	
Time That The Last Data to LD	Tld	1	-	-	Tcw	
Pulse width of LD	Twld	2	-	-	Tcw	
Time That LD to DIO1/2	Tlds	5	-	-	Tcw	
POL Set-up Time	Tpsu	6	-	-	ns	
POL Hold Time	Tphd	6	-	-	ns	
OE Pulse Width	T <sub>OE</sub> V	1	-	-	μs	
CKV Pulse Width	T <sub>CKV</sub>	500	-	-	ns	
STV Set-up Time	T <sub>SUV</sub>	400	-	-	ns	
STV Hold Time	T <sub>H<sub>HDV</sub></sub>	400	-	-	ns	
Horizontal Display Period	T <sub>HDP</sub>	1024	1024	1024	Tcw	
Horizontal Period Timing Range	T <sub>HP</sub>	1200	1344	1466	Tcw	
Horizontal Lines Per Field	T <sub>V</sub>	-	625	-	T <sub>HP</sub>	
Vertical Display Timing Range	T <sub>DV</sub>	600	600	600	T <sub>HP</sub>	
RSDS Low level Input Voltage	Vilrsds	-	-200	-100	mV	D2[2:0]P,D2[2:0]N, CLKP,CLKN
RSDS High level Input Voltage	Vihrsds	100	200	-	mV	D2[2:0]P,D2[2:0]N, CLKP,CLKN
RSDS reference Voltage	Vcomrsds	VSS1+0.1	1.2	VDD1-1.2	V	D2[2:0]P,D2[2:0]N, CLKP,CLKN

11-2) Timing Diagram

1.  $V_{CMRSDS} = (V_{CLKP} + V_{CLKN}) / 2$  or  $V_{CMRSDS} = (V_{DxxP} + V_{DxxN}) / 2$
2.  $V_{DIFFRSDS} = V_{CLKP} - V_{CLKN}$  or  $V_{DIFFRSDS} = V_{DxxP} - V_{DxxN}$

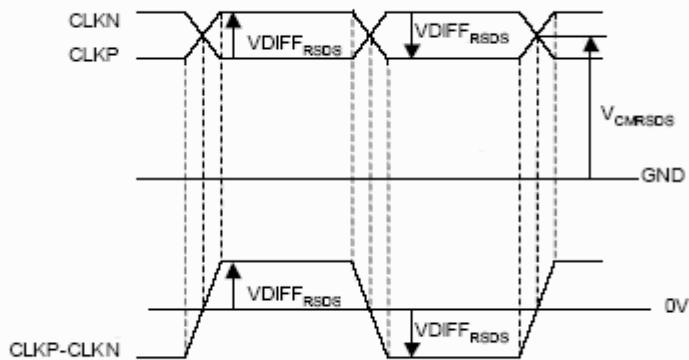


Figure11-1 RSDS clock

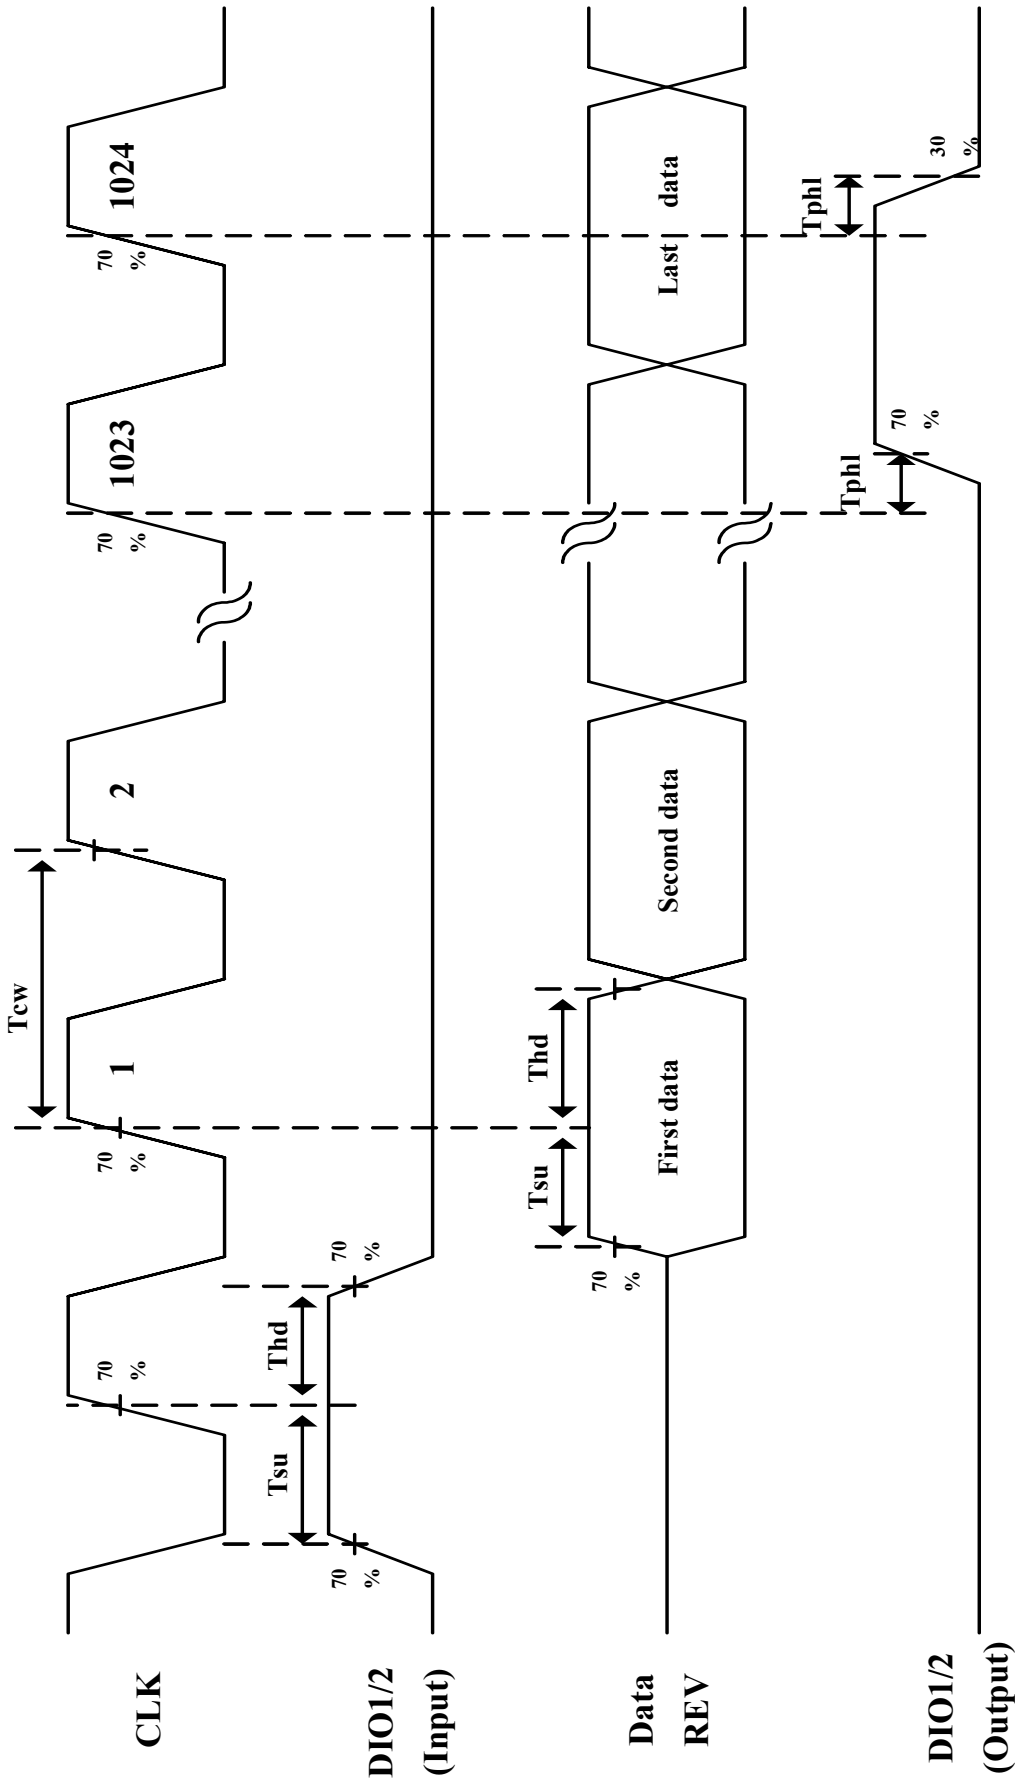
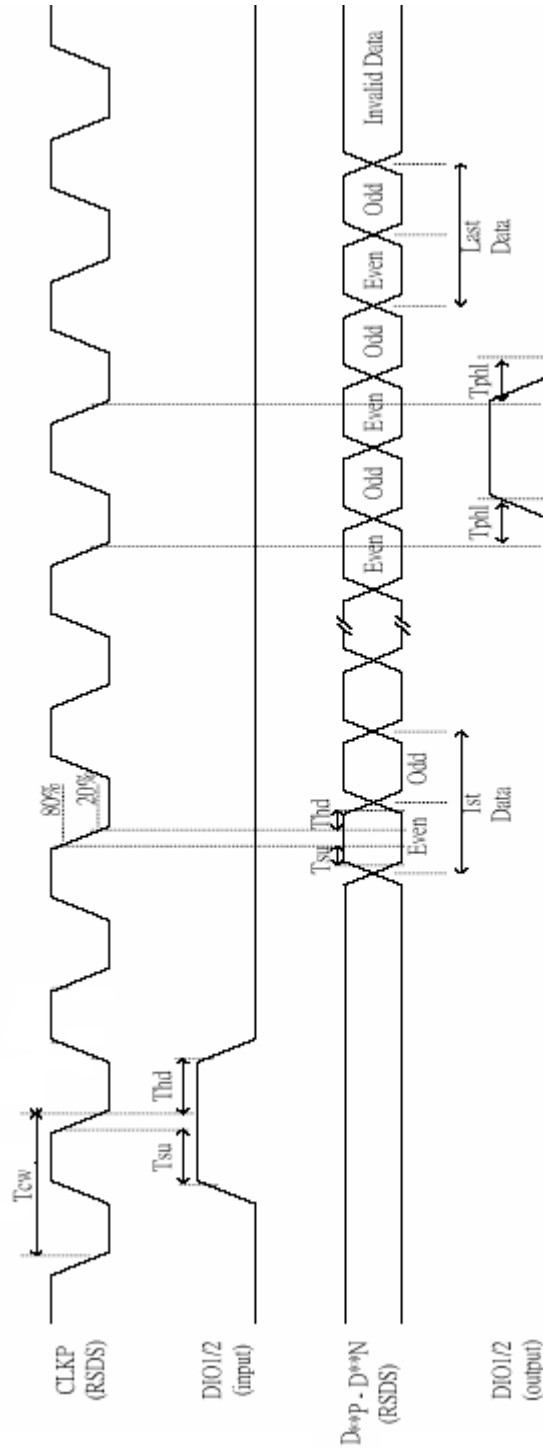


Fig. 11-2 Horizontal timing-TTL(1)





**Figure 11-2 Horizontal timing-RSDS(2)**

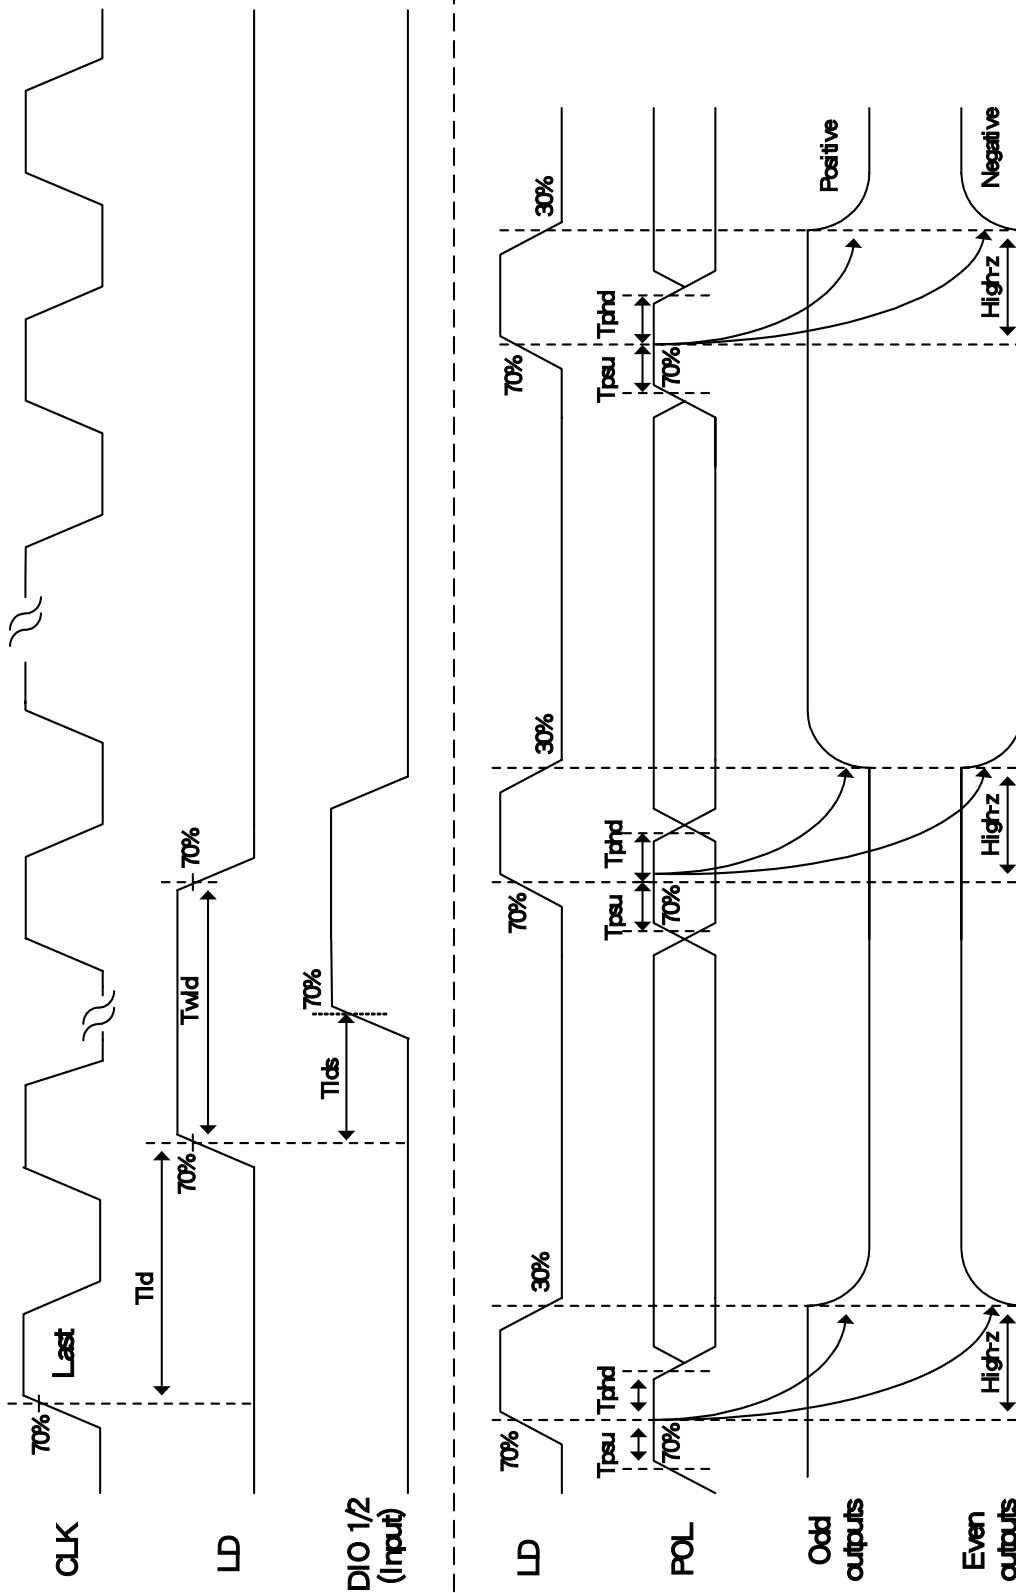


Fig. 11-3 Horizontal timing

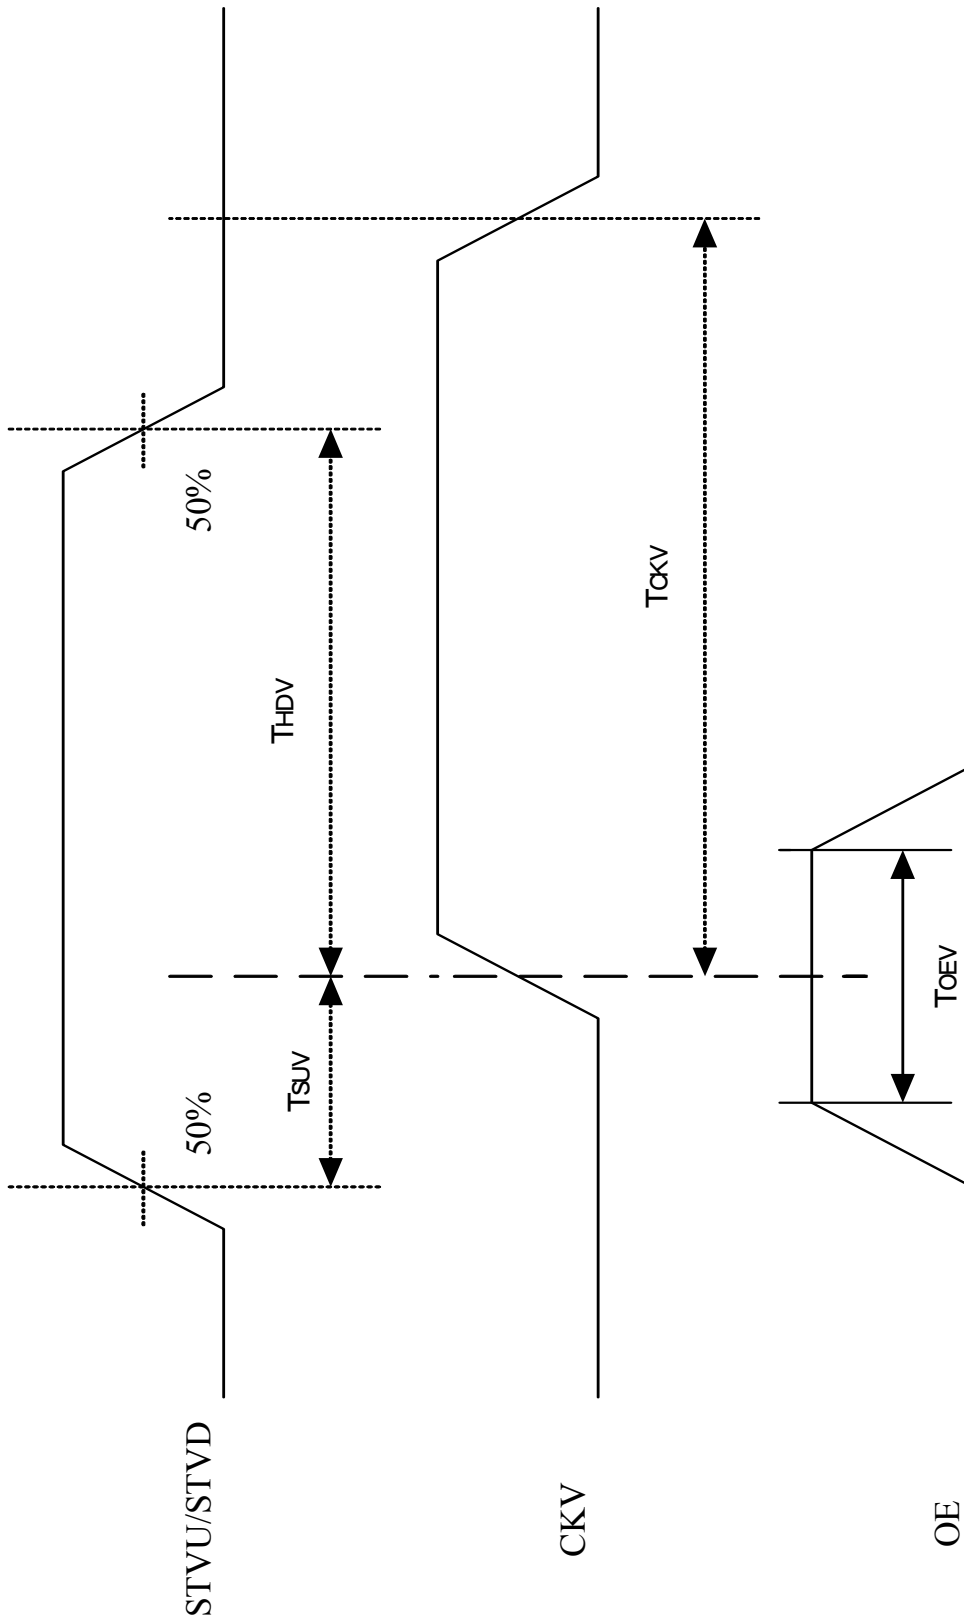


Fig. 11-4 Vertical shift clock timing


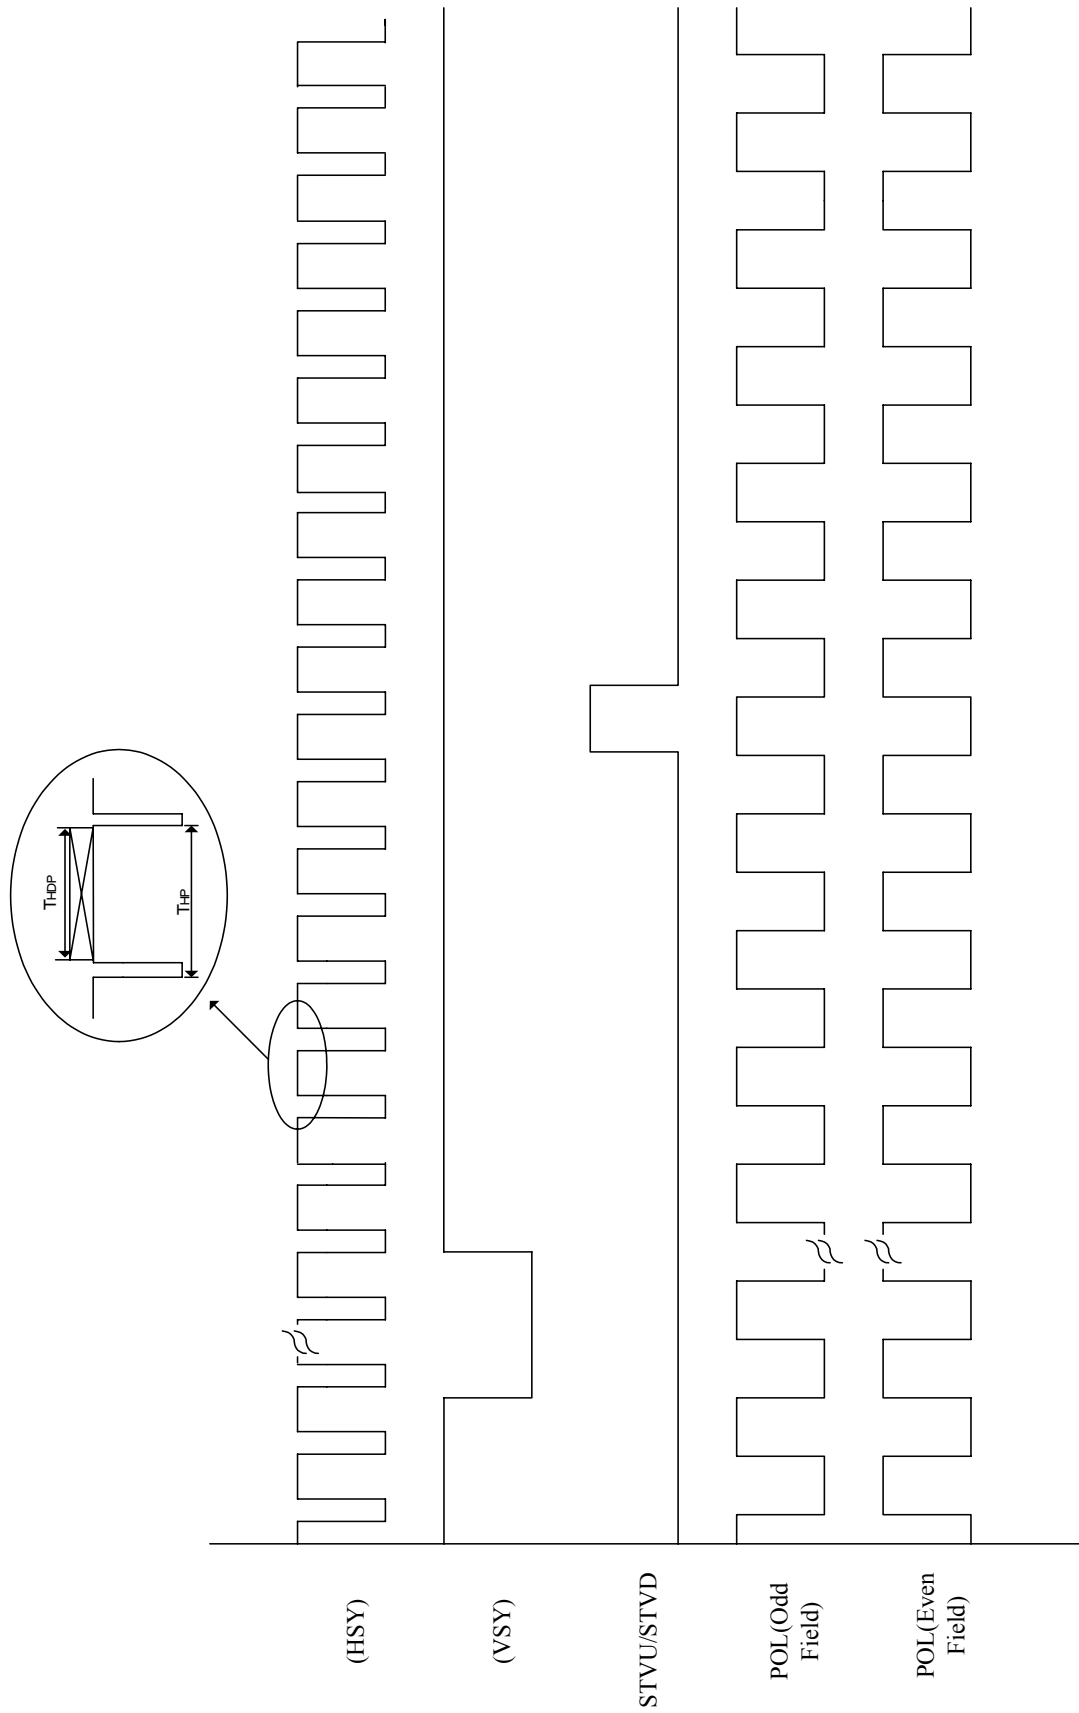


Fig. 11-5 Vertical timing

12. Power On Sequence

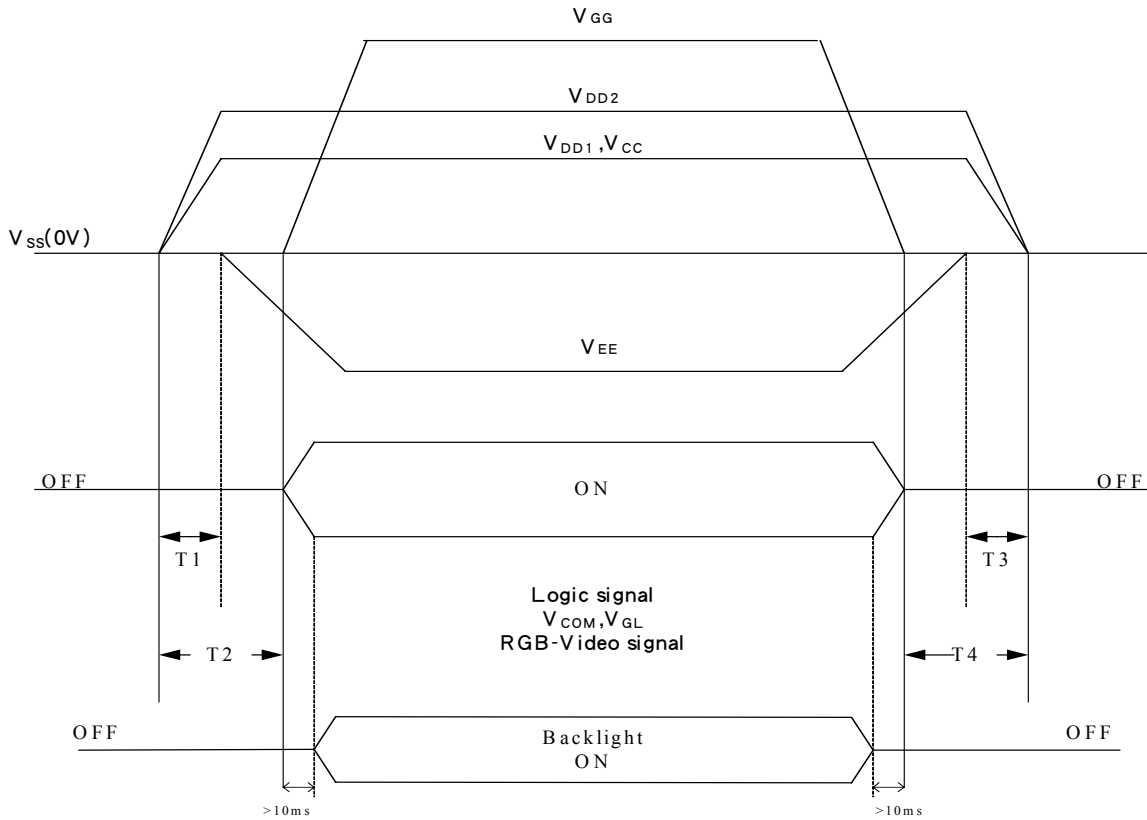

1.  $10\text{ms} \cong T1 < T2$
2.  $0\text{ms} < T3 \cong T4 \cong 10\text{ms}$


13. Optical Characteristics

13-1) Specification:

T<sub>a</sub> = 25°C


Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit	Remarks
Viewing Angle	Horizontal	$\theta$	55	60	-	deg	Note 13-1
	Vertical	$\theta$ (to 12 'clock)	35	40	-	deg	
		$\theta$ (to 6 o'clock)	50	55	-	deg	
Contrast Ratio	CR	At optimized Viewing angle	200	600	-	-	Note 13-2
Brightness	L	$\theta = 0^\circ / \phi = 0^\circ$	300	350	-	cd/m <sup>2</sup>	Note 13-4
Response time	Rise	$\theta = 0^\circ / \phi = 0^\circ$	-	15	30	ms	Note 13-3
	Fall			25	50		
Cross Talk Ratio	CTK	-	-	-	3.5	%	Note 13-5
Luminance Uniformity	U	-	75	80	-	%	Note 13-6
White Chromaticity	x	$\theta = 0^\circ / \phi = 0^\circ$	0.28	0.31	0.34	-	Note 13-4
	y		0.31	0.34	0.37	-	
Lamp Life Time		25°C	30000	-	-	hrs	At=6mA

Note 13-1: The definitions of viewing angles are as follow

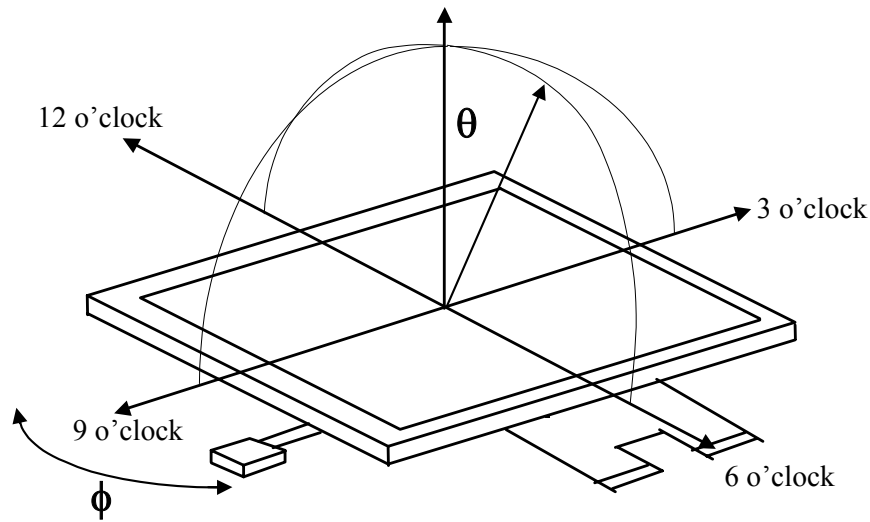

Note 13-2 : The definition of contrast ratio  $CR = \frac{\text{Luminance at gray level 63}}{\text{Luminance at gray level 0}}$

Note 13-3: Definition of Response Time  $T_r$  and  $T_f$ :

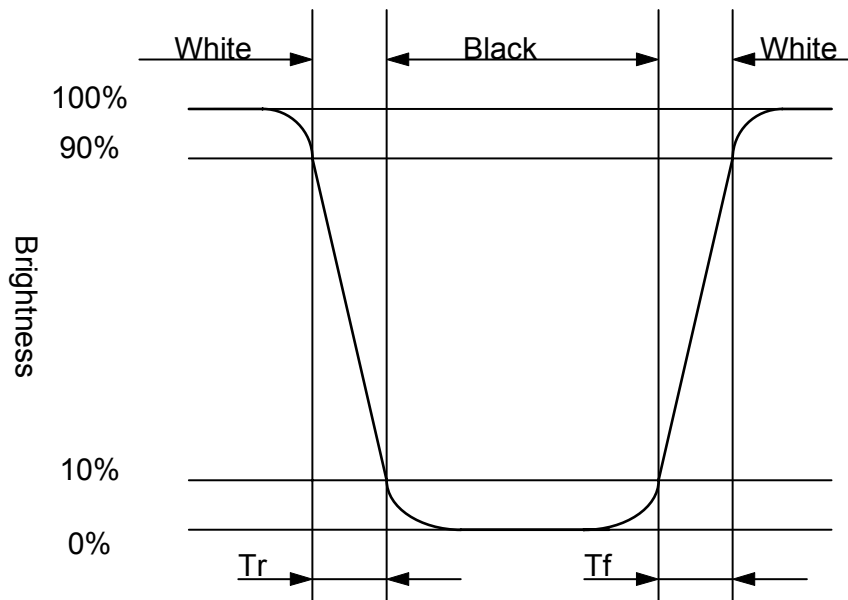

- Note 13-4 :
- 1.Topcon BM-7(fast) luminance meter 1° field of view is used in the testing (after 20~30 minutes operation).
  - 2.Lamp current : 6 mA
  - 3.Inverter model : TDK-347.

Note 13-5: Cross Talk (CTK) =  $\frac{|YA-YB|}{YA} \times 100\%$

YA: Brightness of Pattern A


YB: Brightness of Pattern B

Luminance meter : BM 5A (TOPCON)

Measurement distance : 500 mm +/- 50 mm

Ambient illumination : < 1 Lux

Measuring direction : Perpendicular to the surface of module

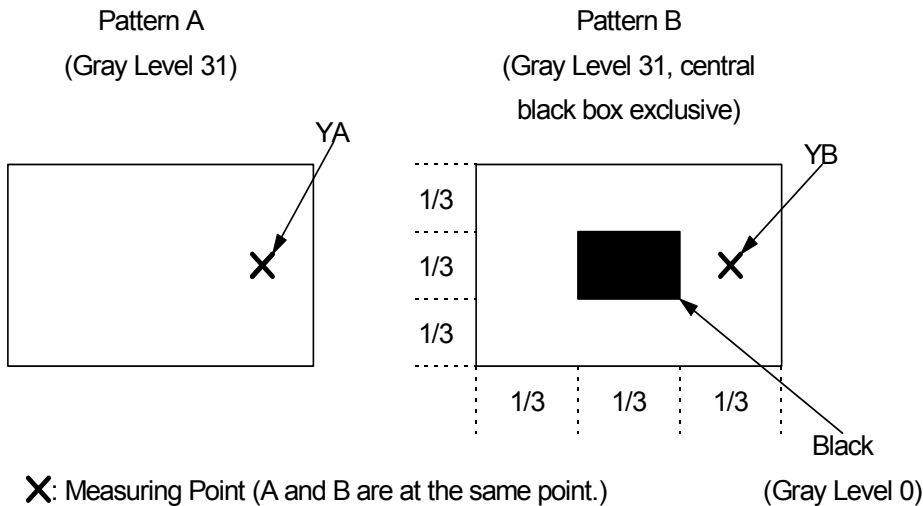

Note 13-6 : The uniformity of LCD is defined as

$$U = \frac{\text{The Minimum Brightness of the 9 testing Points}}{\text{The Maximum Brightness of the 9 testing Points}}$$


Luminance meter : BM-5A or BM-7 fast (TOPCON)

Measurement distance : 500 mm +/- 50 mm

Ambient illumination : < 1 Lux

Measuring direction : Perpendicular to the surface of module

The test pattern is white (Gray Level 63).

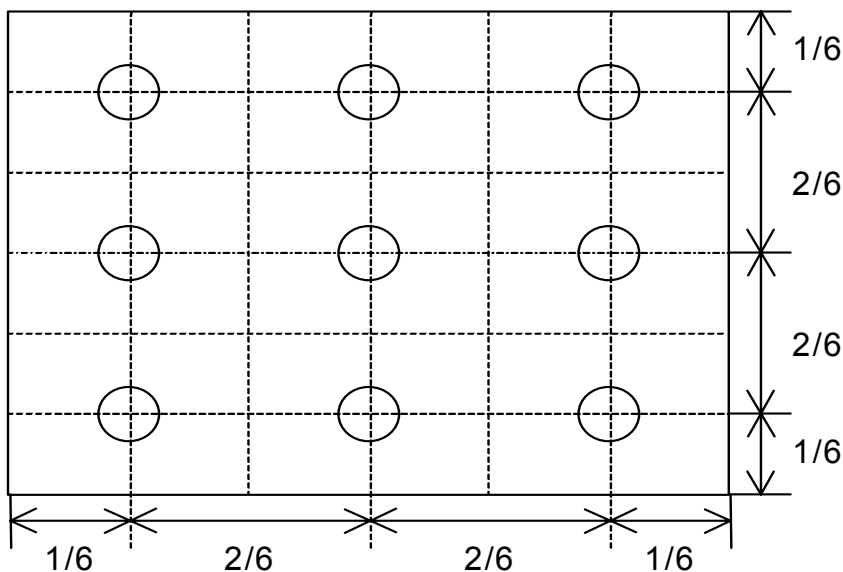

## 14. Handling Cautions

### 14-1) Mounting of module

- a) Please power off the module when you connect the input/output connector.
- b) Please connect the ground pattern of the inverter circuit surely. If the connection is not perfect, some following problems may happen possibly.
  - 1. The noise from the backlight unit will increase.
  - 2. The output from inverter circuit will be unstable.
  - 3. In some cases a part of module will heat.
- c) Polarizer which is made of soft material and susceptible to flaw must be handled carefully.
- d) Protective film (Laminator) is applied on surface to protect it against scratches and dirt. It is recommended to peel off the laminator before use and taking care of static electricity.

### 14-2) Precautions in mounting

- a) When metal part of the TFT-LCD module (shielding lid and rear case) is soiled, wipe it with soft dry cloth.
- b) Wipe off water drops or finger grease immediately. Long contact with water may cause discoloration or spots.
- c) TFT-LCD module uses glass which breaks or cracks easily if dropped or bumped on hard surface. Please handle with care.
- d) Since CMOS LSI is used in the module. So take care of static electricity and earth yourself when handling.

### 14-3) Adjusting module

- a) Adjusting volumes on the rear face of the module have been set optimally before shipment.
- b) Therefore, do not change any adjusted values. If adjusted values are changed, the Specifications described may not be satisfied.

### 14-4) Others

- a) Do not expose the module to direct sunlight or intensive ultraviolet rays for many hours.
- b) Store the module at a room temperature place.
- c) The voltage of beginning electric discharge may over the normal voltage because of leakage current from approach conductor by to draw lump read lead line around.
- d) If LCD panel breaks, it is possibly that the liquid crystal escapes from the panel. Avoid putting it into eyes or mouth. When liquid crystal sticks on hands, clothes or feet. Wash it out immediately with soap.
- e) Observe all other precautionary requirements in handling general electronic components.
- f) Please adjust the voltage of common electrode as material of attachment by 1 module.



15. Reliability Test

No	Test Item	Test Condition
1	High Temperature Storage Test	Ta = +80°C, 240 hrs
2	Low Temperature Storage Test	Ta = -30°C, 240 hrs
3	High Temperature Operation Test	Ta = +80°C, 240 hrs
4	Low Temperature Operation Test	Ta = -20°C, 240 hrs
5	High Temperature & High Humidity Operation Test	Ta = +50°C, 80%RH, 240 hrs
6	Thermal Cycling Test (non-operating)	0°C → +60°C, 50 Cycles 1hr 1hr
7	Vibration Test (non-operating)	Frequency : 10 ~ 57 Hz, Amplitude : 0.5 mm 58~500Hz, 1G Sweep time: 11 min Test Period: 3 hrs (1 hr for each direction of X, Y, Z)
8	Shock Test (non-operating)	80G, 6ms, X,Y, Z 1 times for each direction
9	Electrostatic Discharge Test (non-operating)	200pF, 0Ω ±200V 1 time / each terminal


Ta: ambient temperature

Note: The protective film must be removed before temperature test

[Criteria]

In the standard conditions, there is not display function NG issue occurred. (Including: line defect ,no image). All the cosmetic specification is judged before the reliability stress.

16.Packing

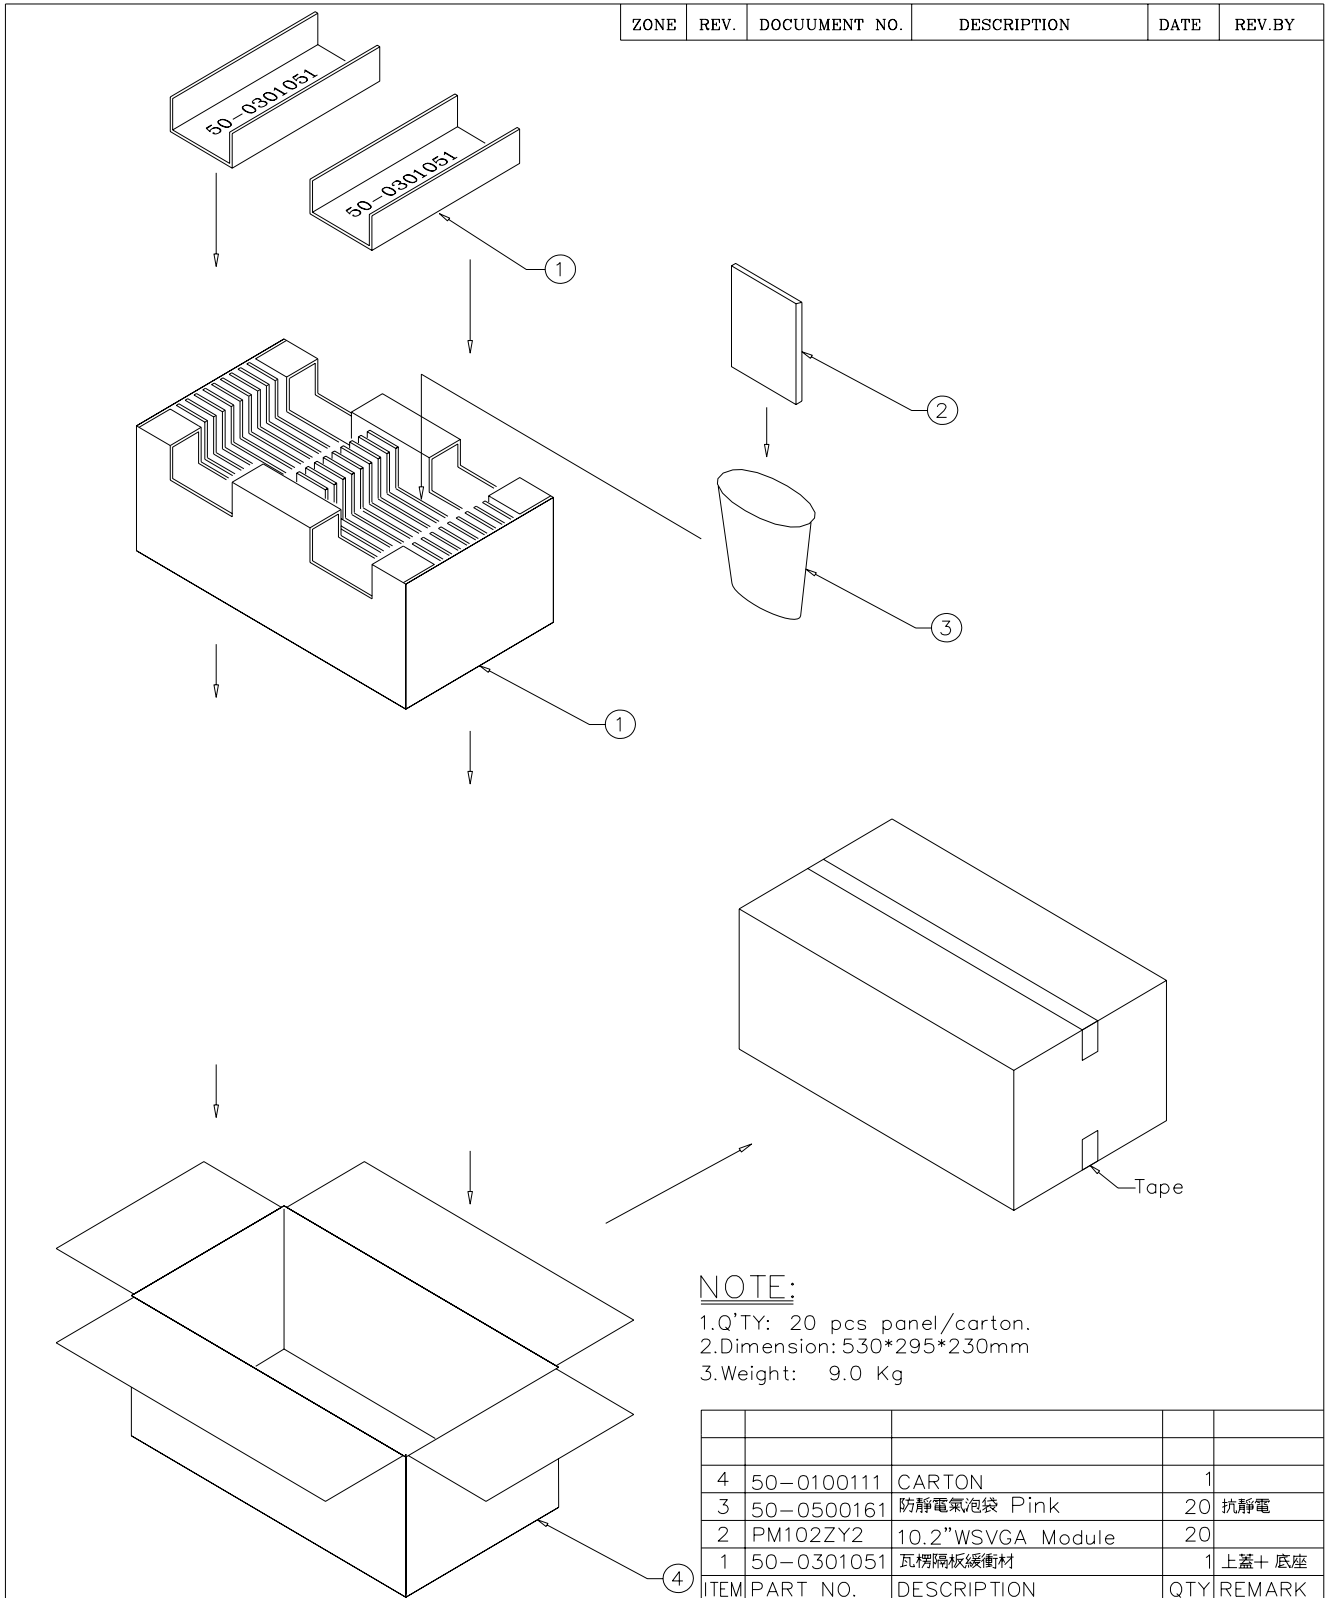

NOTE:

- 1.Q'TY: 20 pcs panel/carton.
- 2.Dimension: 530\*295\*230mm
- 3.Weight: 9.0 Kg

ITEM	PART NO.	DESCRIPTION	QTY	REMARK
4	50-0100111	CARTON	1	
3	50-0500161	防靜電氣泡袋 Pink	20	抗靜電
2	PM102ZY2	10.2"WSVGA Module	20	
1	50-0301051	瓦楞隔板緩衝材	1	上蓋+底座

MTL.SPEC.		UNSPECIFIED TOL'S		REMARK		元太科技工業股份有限公司 Prime View International Co., Ltd.	
		ANGLE					
		ROUGHNESS				DWG.TITLE	
APPROVE	Frank Shin	'07.05.31	SCALE	UNIT	SHEET	PM102ZY2 Packing Draw	
CHECK	Frank Shin	'07.05.31			1 OF 1		
DRAWN	Patrick	'07.05.31	MTL.NO.		DWG FILE:		REV. 01
							A <sub>4</sub> SIZE