


PM514BA


N-Channel Enhancement Mode MOSFET

PRODUCT SUMMARY

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
20V	40mΩ @ $V_{GS} = 4.5V$	3.3A



SOT-23(S)



ABSOLUTE MAXIMUM RATINGS ($T_A = 25\text{ }^{\circ}\text{C}$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNITS
Gate-Source Voltage		V_{GS}	± 8	V
Continuous Drain Current	$T_A = 25\text{ }^{\circ}\text{C}$	I_D	3.3	A
	$T_A = 70\text{ }^{\circ}\text{C}$		2.7	
Pulsed Drain Current ¹		I_{DM}	12	
Power Dissipation	$T_A = 25\text{ }^{\circ}\text{C}$	P_D	0.7	W
	$T_A = 70\text{ }^{\circ}\text{C}$		0.4	
Operating Junction & Storage Temperature Range		T_J, T_{STG}	-55 to 150	$^{\circ}\text{C}$

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Ambient ²	$R_{\theta JA}$		170	$^{\circ}\text{C} / \text{W}$

¹Pulse width limited by maximum junction temperature.

²The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^{\circ}\text{C}$.

PM514BA

N-Channel Enhancement Mode MOSFET

ELECTRICAL CHARACTERISTICS (T_J = 25 °C, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNITS
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = 250μA	20			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	0.5	0.7	1	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0V, V _{GS} = ±8V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 16V, V _{GS} = 0V			1	μA
		V _{DS} = 10V, V _{GS} = 0V , T _J = 55 °C			10	
Drain-Source On-State Resistance ¹	R _{DS(ON)}	V _{GS} = 1.8V, I _D = 2.5A		55	80	mΩ
		V _{GS} = 2.5V, I _D = 2.8A		36	50	
		V _{GS} = 4.5V, I _D = 3A		29	40	
Forward Transconductance ¹	g _{fs}	V _{DS} = 5V, I _D = 3A		16		S
DYNAMIC						
Input Capacitance	C _{iss}	V _{GS} = 0V, V _{DS} = 10V, f = 1MHz		331		pF
Output Capacitance	C _{oss}			56		
Reverse Transfer Capacitance	C _{rss}			44		
Total Gate Charge ²	Q _g	V _{DS} = 10V, V _{GS} = 4.5V, I _D = 3A		5		nC
Gate-Source Charge ²	Q _{gs}			0.6		
Gate-Drain Charge ²	Q _{gd}			1.7		
Turn-On Delay Time ²	t _{d(on)}	V _{DD} = 10V I _D ≅ 3A, V _{GEN} = 4.5V, R _G = 6Ω		30		nS
Rise Time ²	t _r			30		
Turn-Off Delay Time ²	t _{d(off)}			90		
Fall Time ²	t _f			31		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICE (T _J = 25 °C)						
Continuous Current	I _S				0.7	A
Forward Voltage ¹	V _{SD}	I _F = 3A, V _{GS} = 0V			1	V
Reverse Recovery Time	t _{rr}	I _F = 3A, dI _F /dt = 100A /μS		10		nS
Reverse Recovery Change	Q _{rr}			2		nC


¹Pulse test : Pulse Width ≤ 300 μsec, Duty Cycle ≤ 2%.

²Independent of operating temperature.


PM514BA

N-Channel Enhancement Mode MOSFET


Output Characteristics

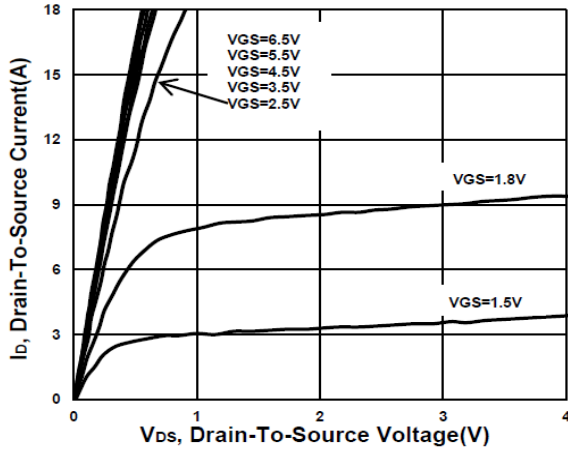


Transfer Characteristics

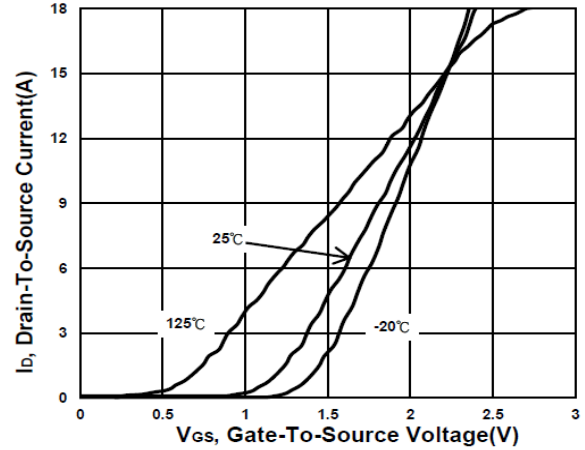


On-Resistance VS Temperature

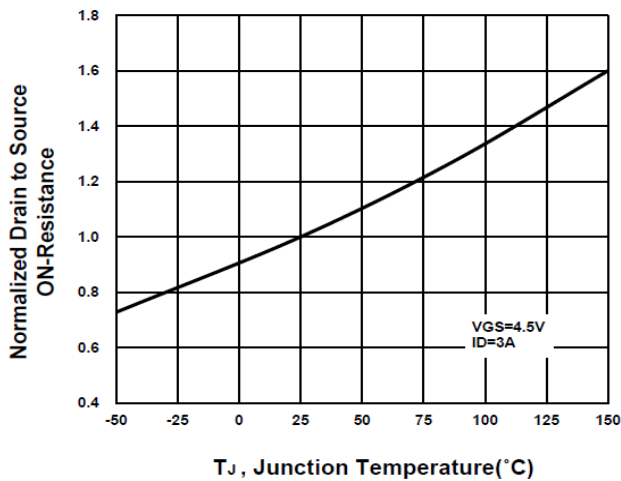


Capacitance Characteristic

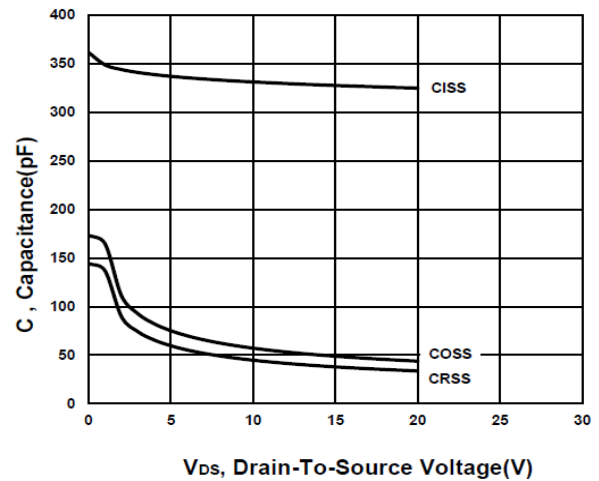

Gate charge Characteristics

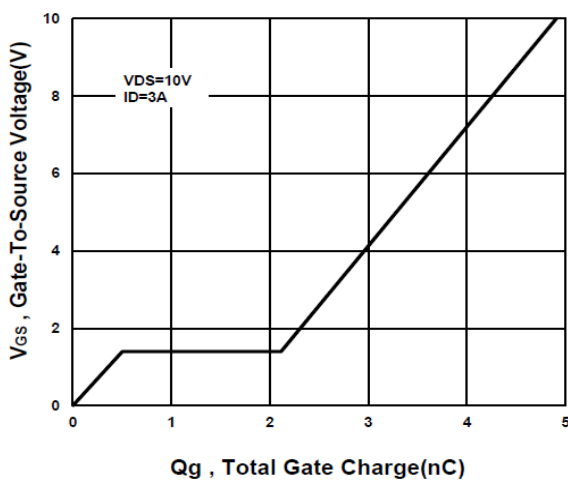


Source-Drain Diode Forward Voltage

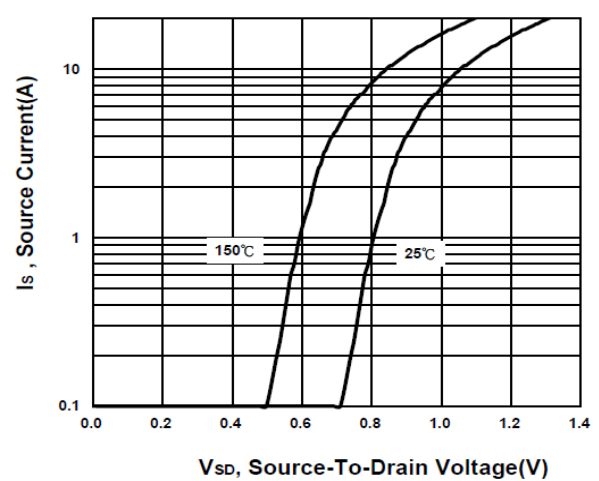


PM514BA

N-Channel Enhancement Mode MOSFET


Safe Operating Area

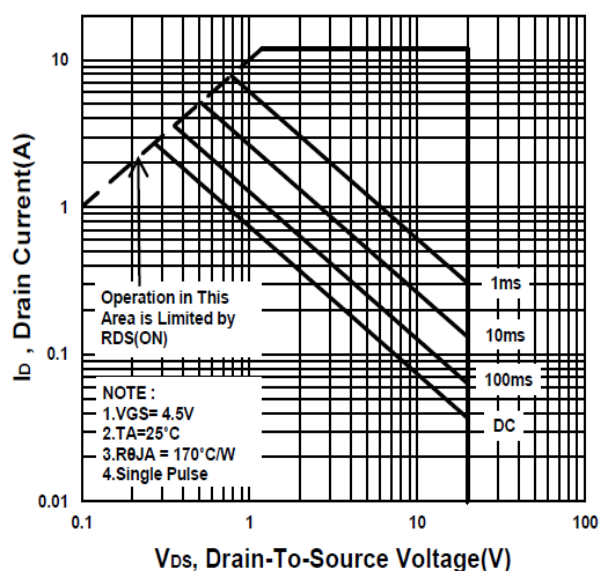

Single Pulse Maximum Power Dissipation

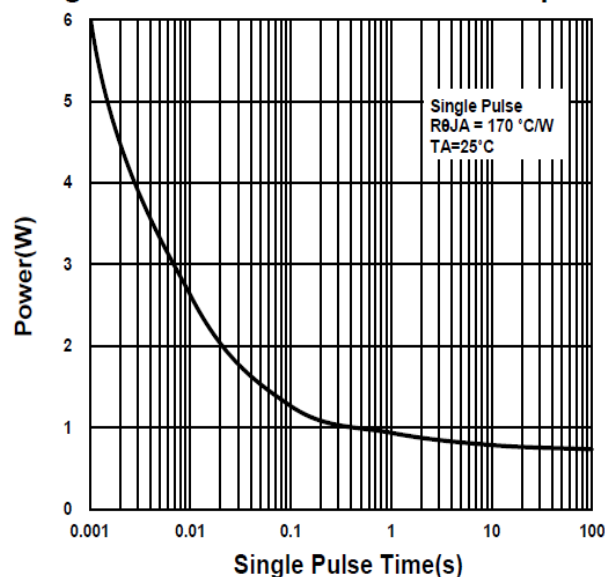

Transient Thermal Response Curve

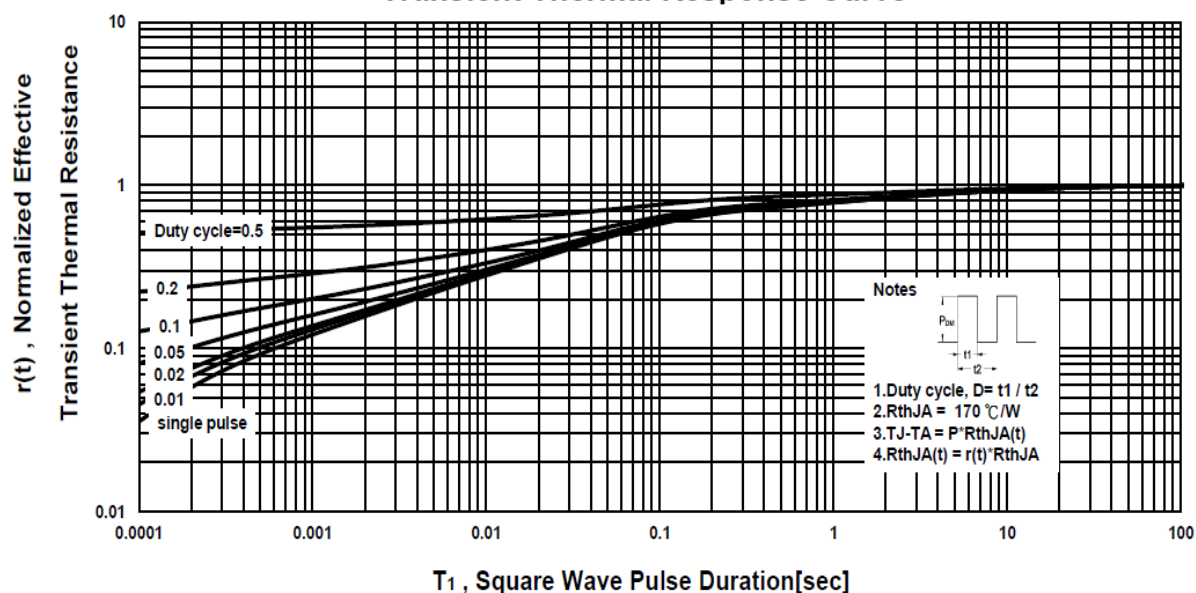


PM514BA

N-Channel Enhancement Mode MOSFET

Package Dimension

SOT-23 (S) MECHANICAL DATA

Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	0.9		1	H	0.08		0.2
B	2.25		2.85	I	0.15		0.6
C	1.2		1.4				
D	2.8		3.04				
E	0.89		1.2				
F	0		0.1				
G	0.3		0.5				

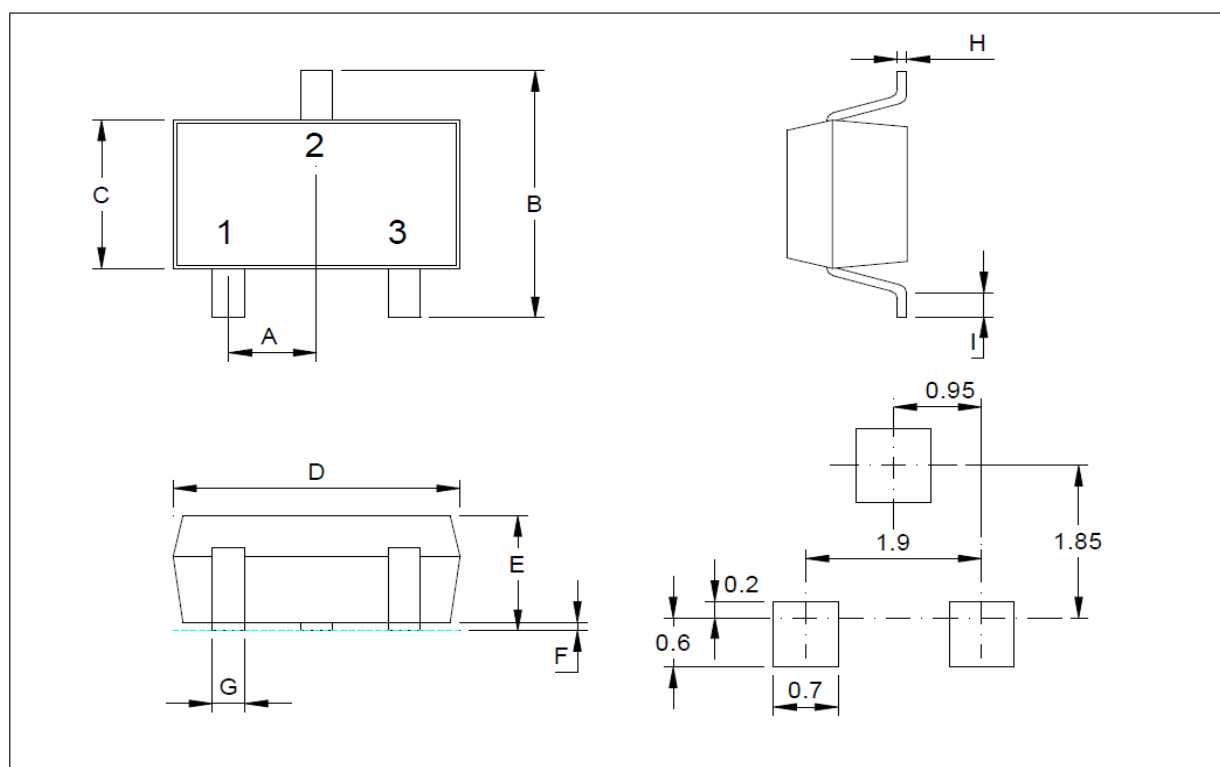


*因为各家封装模具不同而外观略有所差异，不影响电性及Layout。


PM514BA

N-Channel Enhancement Mode MOSFET

A. Marking Information (此产品代码为：2U)

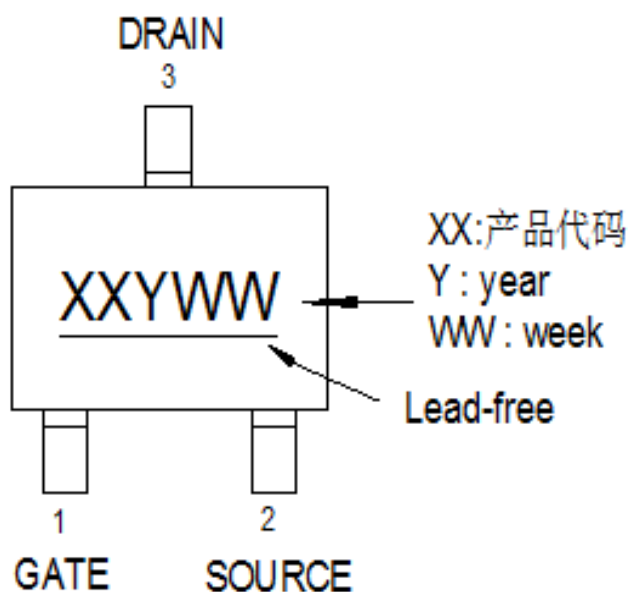

B. Tape&Reel Information:3000pcs/Reel

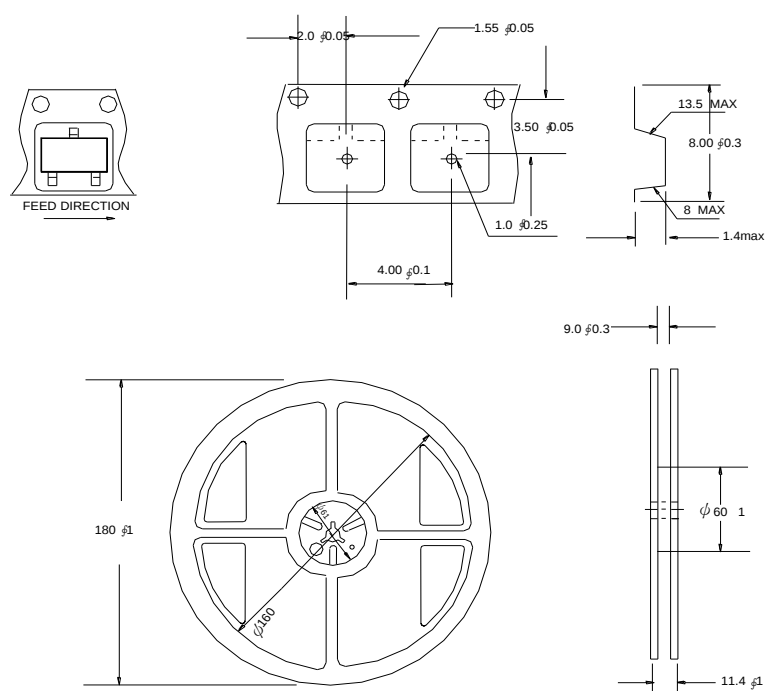


PM514BA


N-Channel Enhancement Mode MOSFET

C. Lot No.&Date Code rule

1.Lot No.

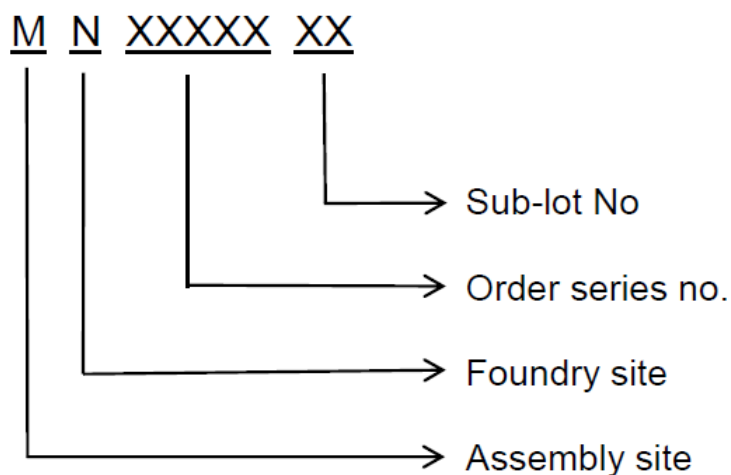

2.Date Code

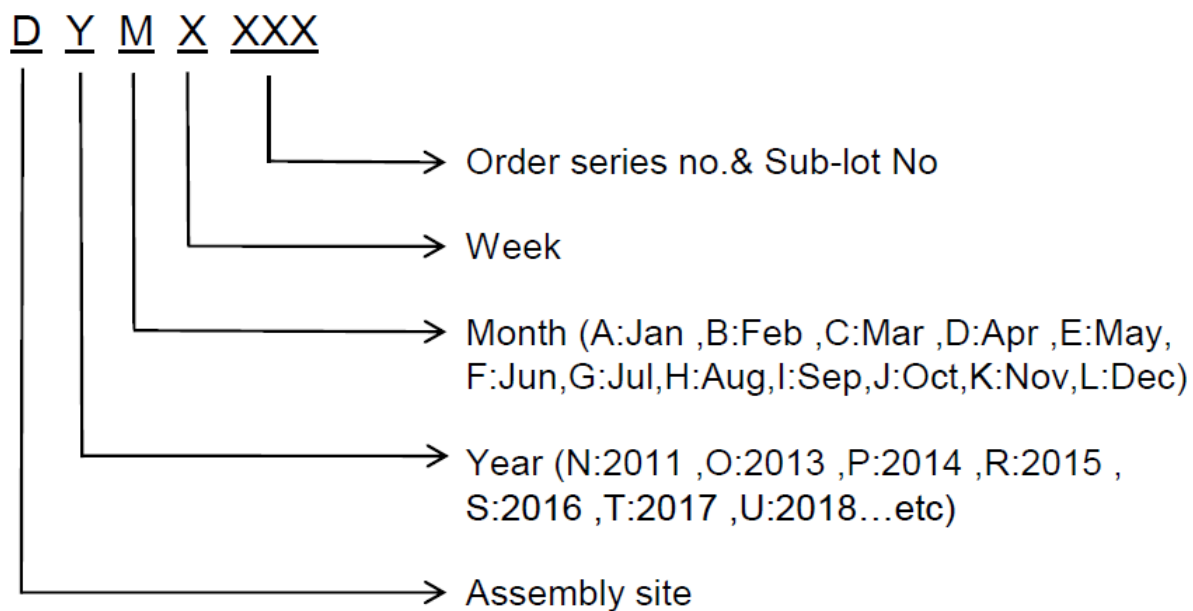

PM514BA

N-Channel Enhancement Mode MOSFET

D.Label rule

标签内容(Label content)



1	Label Size	30 * 90 mm
2	Font style	Times New Roman or Arial (或可区分英文"0"和数字"0", "G"和"Q"的字型即可)
3	U-NIKC	Height: 4 mm
4	Package	Height: 2 mm
5	Date	Height: 2 mm Shipping date: YYYY/MM/DD, ex. 2008/09/12
6	Device	Height: 3 mm (Max: 16 Digit)
7	Lot	Height: 3 mm (Max: 9 Digit) Sub lot
8	D/C	Height: 3 mm (Max: 7 Digit)
9	QTY	Height: 3 mm (Max: 6 Digit) Thousand mark is no needed
10	RoHS label	 long axis: 12 mm minor axis: 6 mm bottom color: White Font color: Black Font style: Arial
11	Halogen Free label	 Diameter: 10 mm bottom color: Green Font color: Black Font style: Arial
12	Scan information	Device / Lot / D/C / QTY, Insert " / " between every parts. for example: P3055LDG/G12345601/GGG2301/2000 DPI (Dots per inch): Over 300 dpi Code : Code 128 Height: 6 mm at least