

General Description


These N-Channel enhancement mode power field effect transistors are using advanced super junction technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency switch mode power supply

BVDSS	RDSON	ID
650V	0.75Ω	12A

Features

- Improved dv/dt capability
- Fast switching
- 100% EAS Guaranteed
- Green Device Available

TO220F Pin Configuration



Applications

- High efficient switched mode power supplies
- TV Power
- Adapter/charger
- Server Power
- PV Inverter / UPS

Absolute Maximum Ratings $T_c=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	650	V
V_{GS}	Gate-Source Voltage	± 30	V
I_D	Drain Current – Continuous ($T_c=25^\circ\text{C}$)	12	A
	Drain Current – Continuous ($T_c=100^\circ\text{C}$)	7.6	A
I_{DM}	Drain Current – Pulsed ¹	48	A
EAS	Single Pulse Avalanche Energy ²	405	mJ
IAS	Single Pulse Avalanche Current ²	9	A
P_D	Power Dissipation ($T_c=25^\circ\text{C}$)	52	W
	Power Dissipation – Derate above 25°C	0.42	W/ $^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	62	$^\circ\text{C/W}$
$R_{\theta JC}$	Thermal Resistance Junction to Case	---	2.4	$^\circ\text{C/W}$

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)
Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$, $I_{\text{D}}=250\mu\text{A}$	650	---	---	V
I_{DSS}	Drain-Source Leakage Current	$V_{\text{DS}}=650\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=25^\circ\text{C}$	---	---	1	μA
		$V_{\text{DS}}=520\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=100^\circ\text{C}$	---	---	10	μA
I_{GSS}	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 30\text{V}$, $V_{\text{DS}}=0\text{V}$	---	---	± 100	nA

On Characteristics

$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{\text{GS}}=10\text{V}$, $I_{\text{D}}=4\text{A}$	---	0.62	0.75	Ω
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$, $I_{\text{D}}=250\mu\text{A}$	2	3	4	V
g_{fs}	Forward Transconductance	$V_{\text{DS}}=30\text{V}$, $I_{\text{D}}=3\text{A}$	---	9	---	S

Dynamic and switching Characteristics

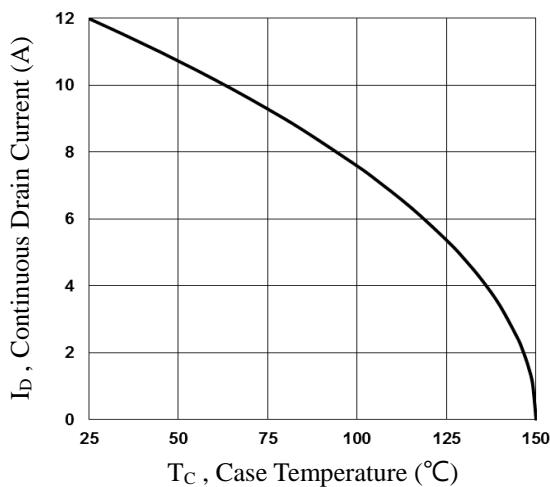
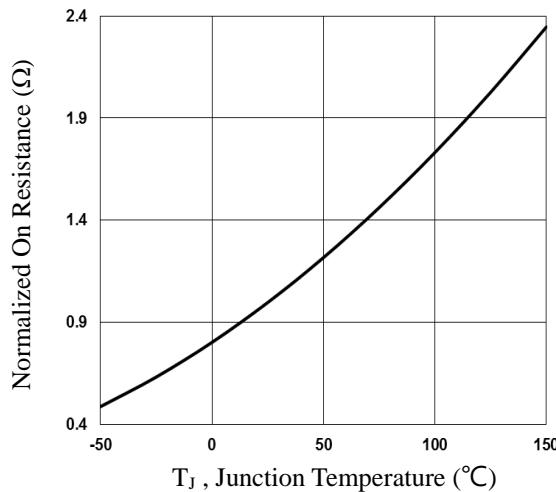
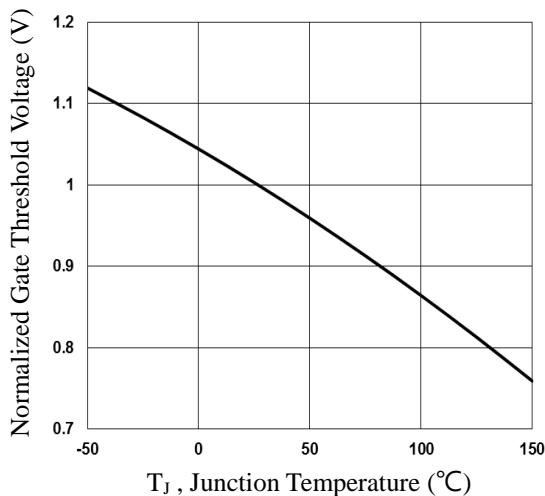
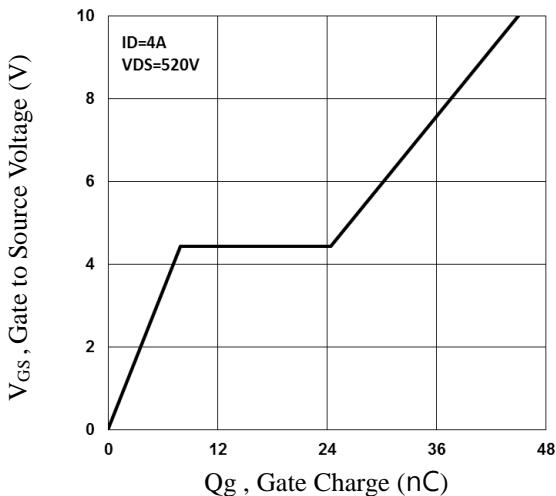
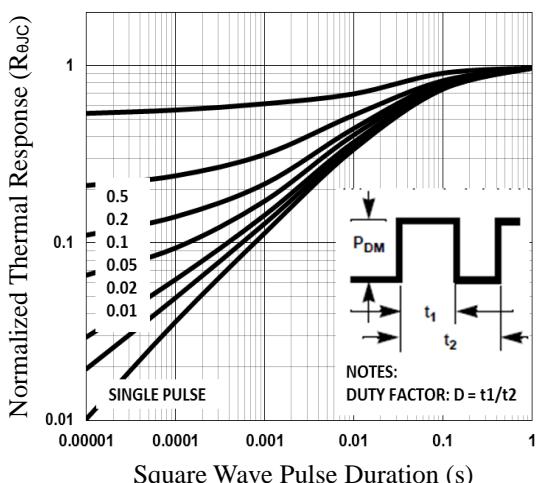
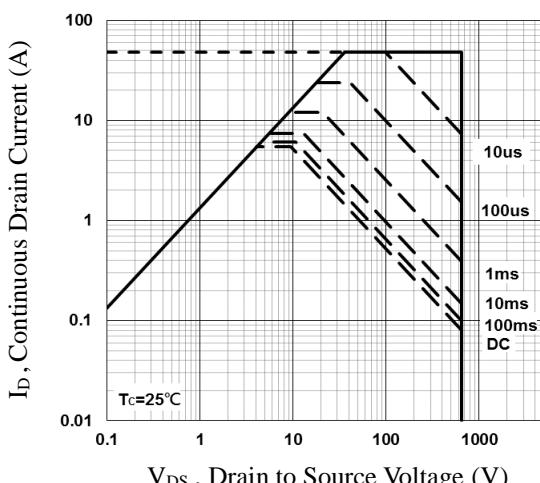
Q_g	Total Gate Charge ^{3,4}	$V_{\text{DS}}=520\text{V}$, $V_{\text{GS}}=10\text{V}$, $I_{\text{D}}=4\text{A}$	---	45	90	nC
Q_{gs}	Gate-Source Charge ^{3,4}		---	7.9	16	
Q_{gd}	Gate-Drain Charge ^{3,4}		---	16.5	32	
$T_{\text{d(on)}}$	Turn-On Delay Time ^{3,4}	$V_{\text{DD}}=300\text{V}$, $V_{\text{GS}}=10\text{V}$, $R_{\text{G}}=25\Omega$ $I_{\text{D}}=4\text{A}$	---	45	90	ns
T_r	Rise Time ^{3,4}		---	68	136	
$T_{\text{d(off)}}$	Turn-Off Delay Time ^{3,4}		---	128	240	
T_f	Fall Time ^{3,4}		---	42	84	
C_{iss}	Input Capacitance	$V_{\text{DS}}=25\text{V}$, $V_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$	---	1640	3200	pF
C_{oss}	Output Capacitance		---	150	300	
C_{rss}	Reverse Transfer Capacitance		---	22	44	
R_g	Gate resistance	$V_{\text{GS}}=0\text{V}$, $V_{\text{DS}}=0\text{V}$, $f=1\text{MHz}$	---	2	4	Ω

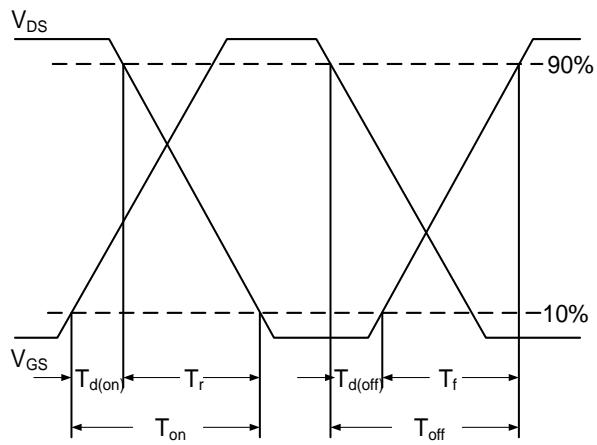
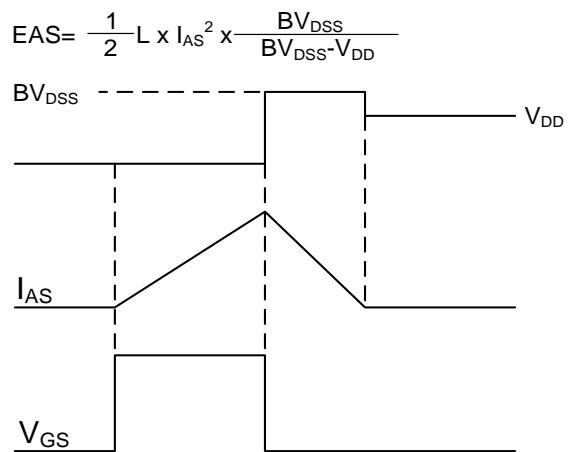
Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current	$V_G=V_D=0\text{V}$, Force Current	---	---	12	A
I_{SM}	Pulsed Source Current		---	---	24	A
V_{SD}	Diode Forward Voltage	$V_{\text{GS}}=0\text{V}$, $I_s=1\text{A}$, $T_J=25^\circ\text{C}$	---	---	1	V

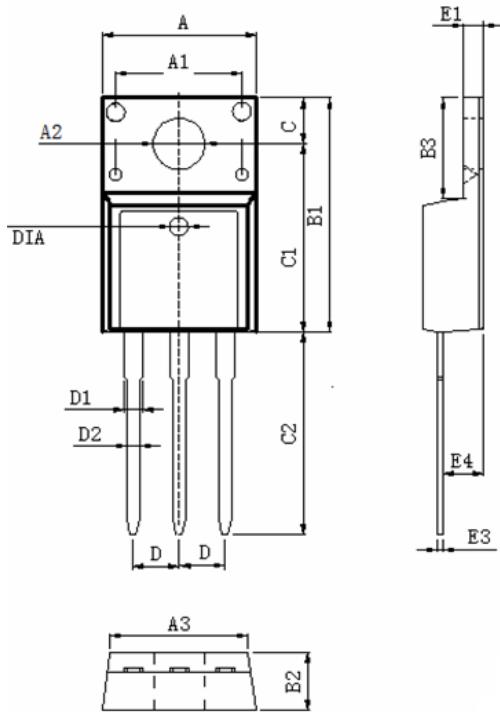
Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. $V_{\text{DD}}=50\text{V}$, $V_{\text{GS}}=10\text{V}$, $L=10\text{mH}$, $I_{\text{AS}}=9\text{A}$, $R_{\text{G}}=25\Omega$, Starting $T_J=25^\circ\text{C}$.
3. The data tested by pulsed , pulse width $\leq 300\text{us}$, duty cycle $\leq 2\%$.
4. Essentially independent of operating temperature.


Fig.1 Continuous Drain Current vs. T_c

Fig.2 Normalized RDS(on) vs. T_j

Fig.3 Normalized V_{th} vs. T_j

Fig.4 Gate Charge Waveform

Fig.5 Normalized Transient Impedance

Fig.6 Maximum Safe Operation Area


Fig.7 Switching Time Waveform

Fig.8 EAS Waveform

TO220F PACKAGE INFORMATION



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	10.460	9.860	0.412	0.388
A1	7.100	6.900	0.280	0.272
A2	3.500	3.100	0.138	0.122
A3	9.900	9.500	0.390	0.374
B1	16.170	15.570	0.637	0.613
B2	4.900	4.500	0.193	0.177
B3	6.880	6.480	0.271	0.255
C	3.500	3.100	0.138	0.122
C1	12.870	12.270	0.507	0.483
C2	13.380	12.580	0.527	0.495
D	2.590	2.490	0.102	0.098
D1	1.470	1.070	0.058	0.042
D2	0.900	0.700	0.035	0.028
E1	2.740	2.340	0.108	0.092
E3	0.600	0.400	0.024	0.016
E4	2.960	2.560	0.117	0.101
DIA	Φ1.5 TYP.	deep0.1 TYP.	Φ0.059 TYP.	deep0.004 TYP.