


# SPECIFICATION

CUSTOMER:		CUST.P/N:	
ITEM:	<b>A6 R 3.5x10</b>	K.C.P/N:	<b>PN0303DA</b>
(1) SHAPE :  		A	<b>3.5±0.15</b> m/m
		B	<b>10±0.3</b> m/m
		C	m/m
		D	m/m
		E	m/m
		F	m/m
		G	m/m
(2) ELECTRICAL REQUIREMENTS:  <p style="text-align: center;"><b>L:4±10%(1KHz/0.25v)</b></p>		(3) TEST CONDITIONS:  <p style="text-align: center;"><b>1 L:CH100LCR</b></p> <p style="text-align: center;"><b>2. WIRE:0.4 2UEW *17TS</b></p>	
		(4) PACKING  <input checked="" type="checkbox"/> IN BULK <input type="checkbox"/> VACUUM <input type="checkbox"/> INSERTION 2000 PCS/BAGS* 4      BAG/INNER BOX* 4      BOXES/CARTON = 32000 PCS PCS/PLATE*      PLATES/CARTON=      PCS PCS/TRAY*      TRAYS/CARTON=      PCS	
(6) REMARK:		(5) APPEARANCE (1) AREA OF BREAK : < 1 m/m <sup>2</sup> (2) SUM OF BREAKING AREA : < 2 m/m <sup>2</sup> (3) DEPTH OF BREAK : < 0.8 m/m	
		Approved by	
		Checked by	
		Drawn by	
		DWG.NO.	

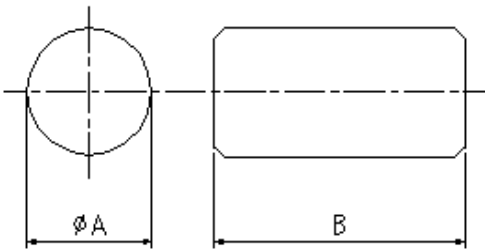

King Core Electronics Inc.  
 Tel:886-3-4782511(Rep.)  
 Fax:886-3-4759923  
 E-mail : kc@mail.kingcore.com.tw